


- | | |
|---|-----------------------------|
| 1 | INPUT GROUP MOUNTING FACE |
| 2 | PTO GROUP MOUNTING FACE |
| 3 | LEFT BRACKET MOUNTING FACE |
| 4 | RIGHT BRACKET MOUNTING FACE |
| 5 | PUMP MOUNTING FACE |

NOTES


NOTES:
A. REFERENCE S930 FOR TWIN DISC REQUIREMENTS FOR PRESSURE AND ALARM LEVELS.

B. UNLESS OTHERWISE SPECIFIED, FASTENER TORQUE VALUES PER S574 STANDARD.






C. ALL POINTS AVAILABLE FOR TESTING ARE CODED

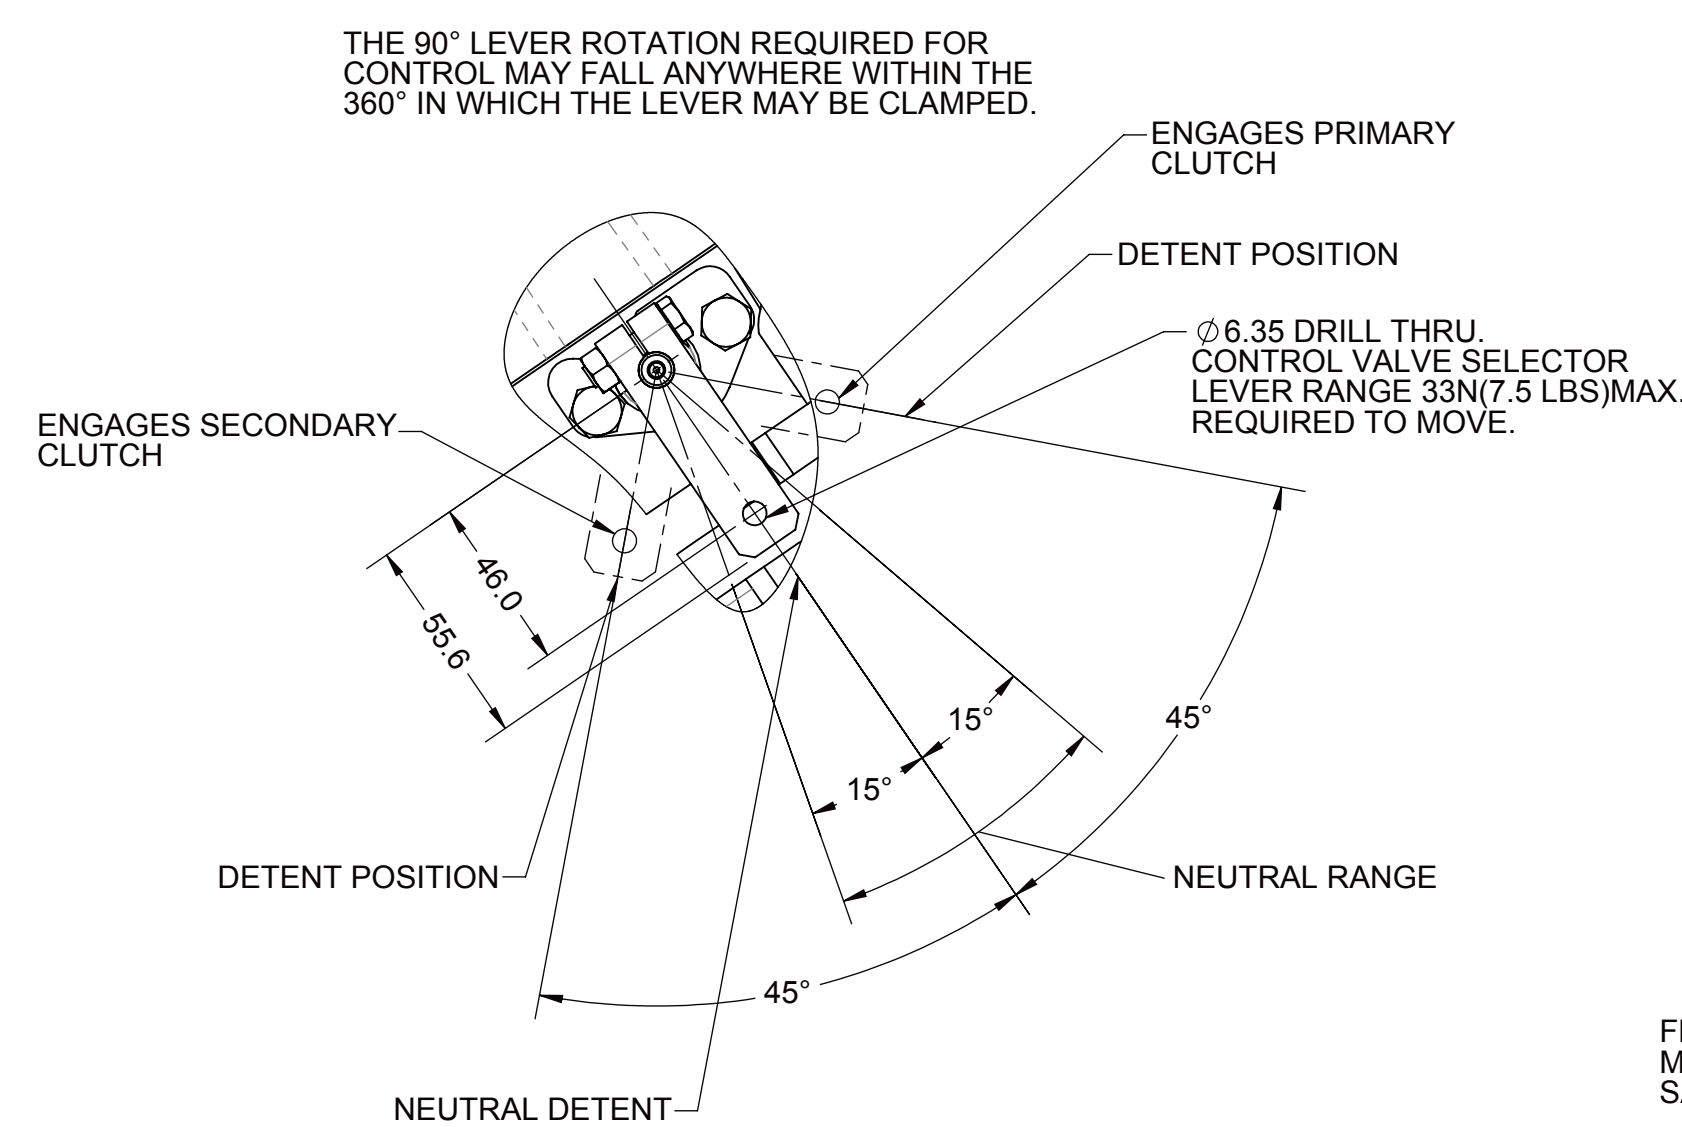

VIEW B-B

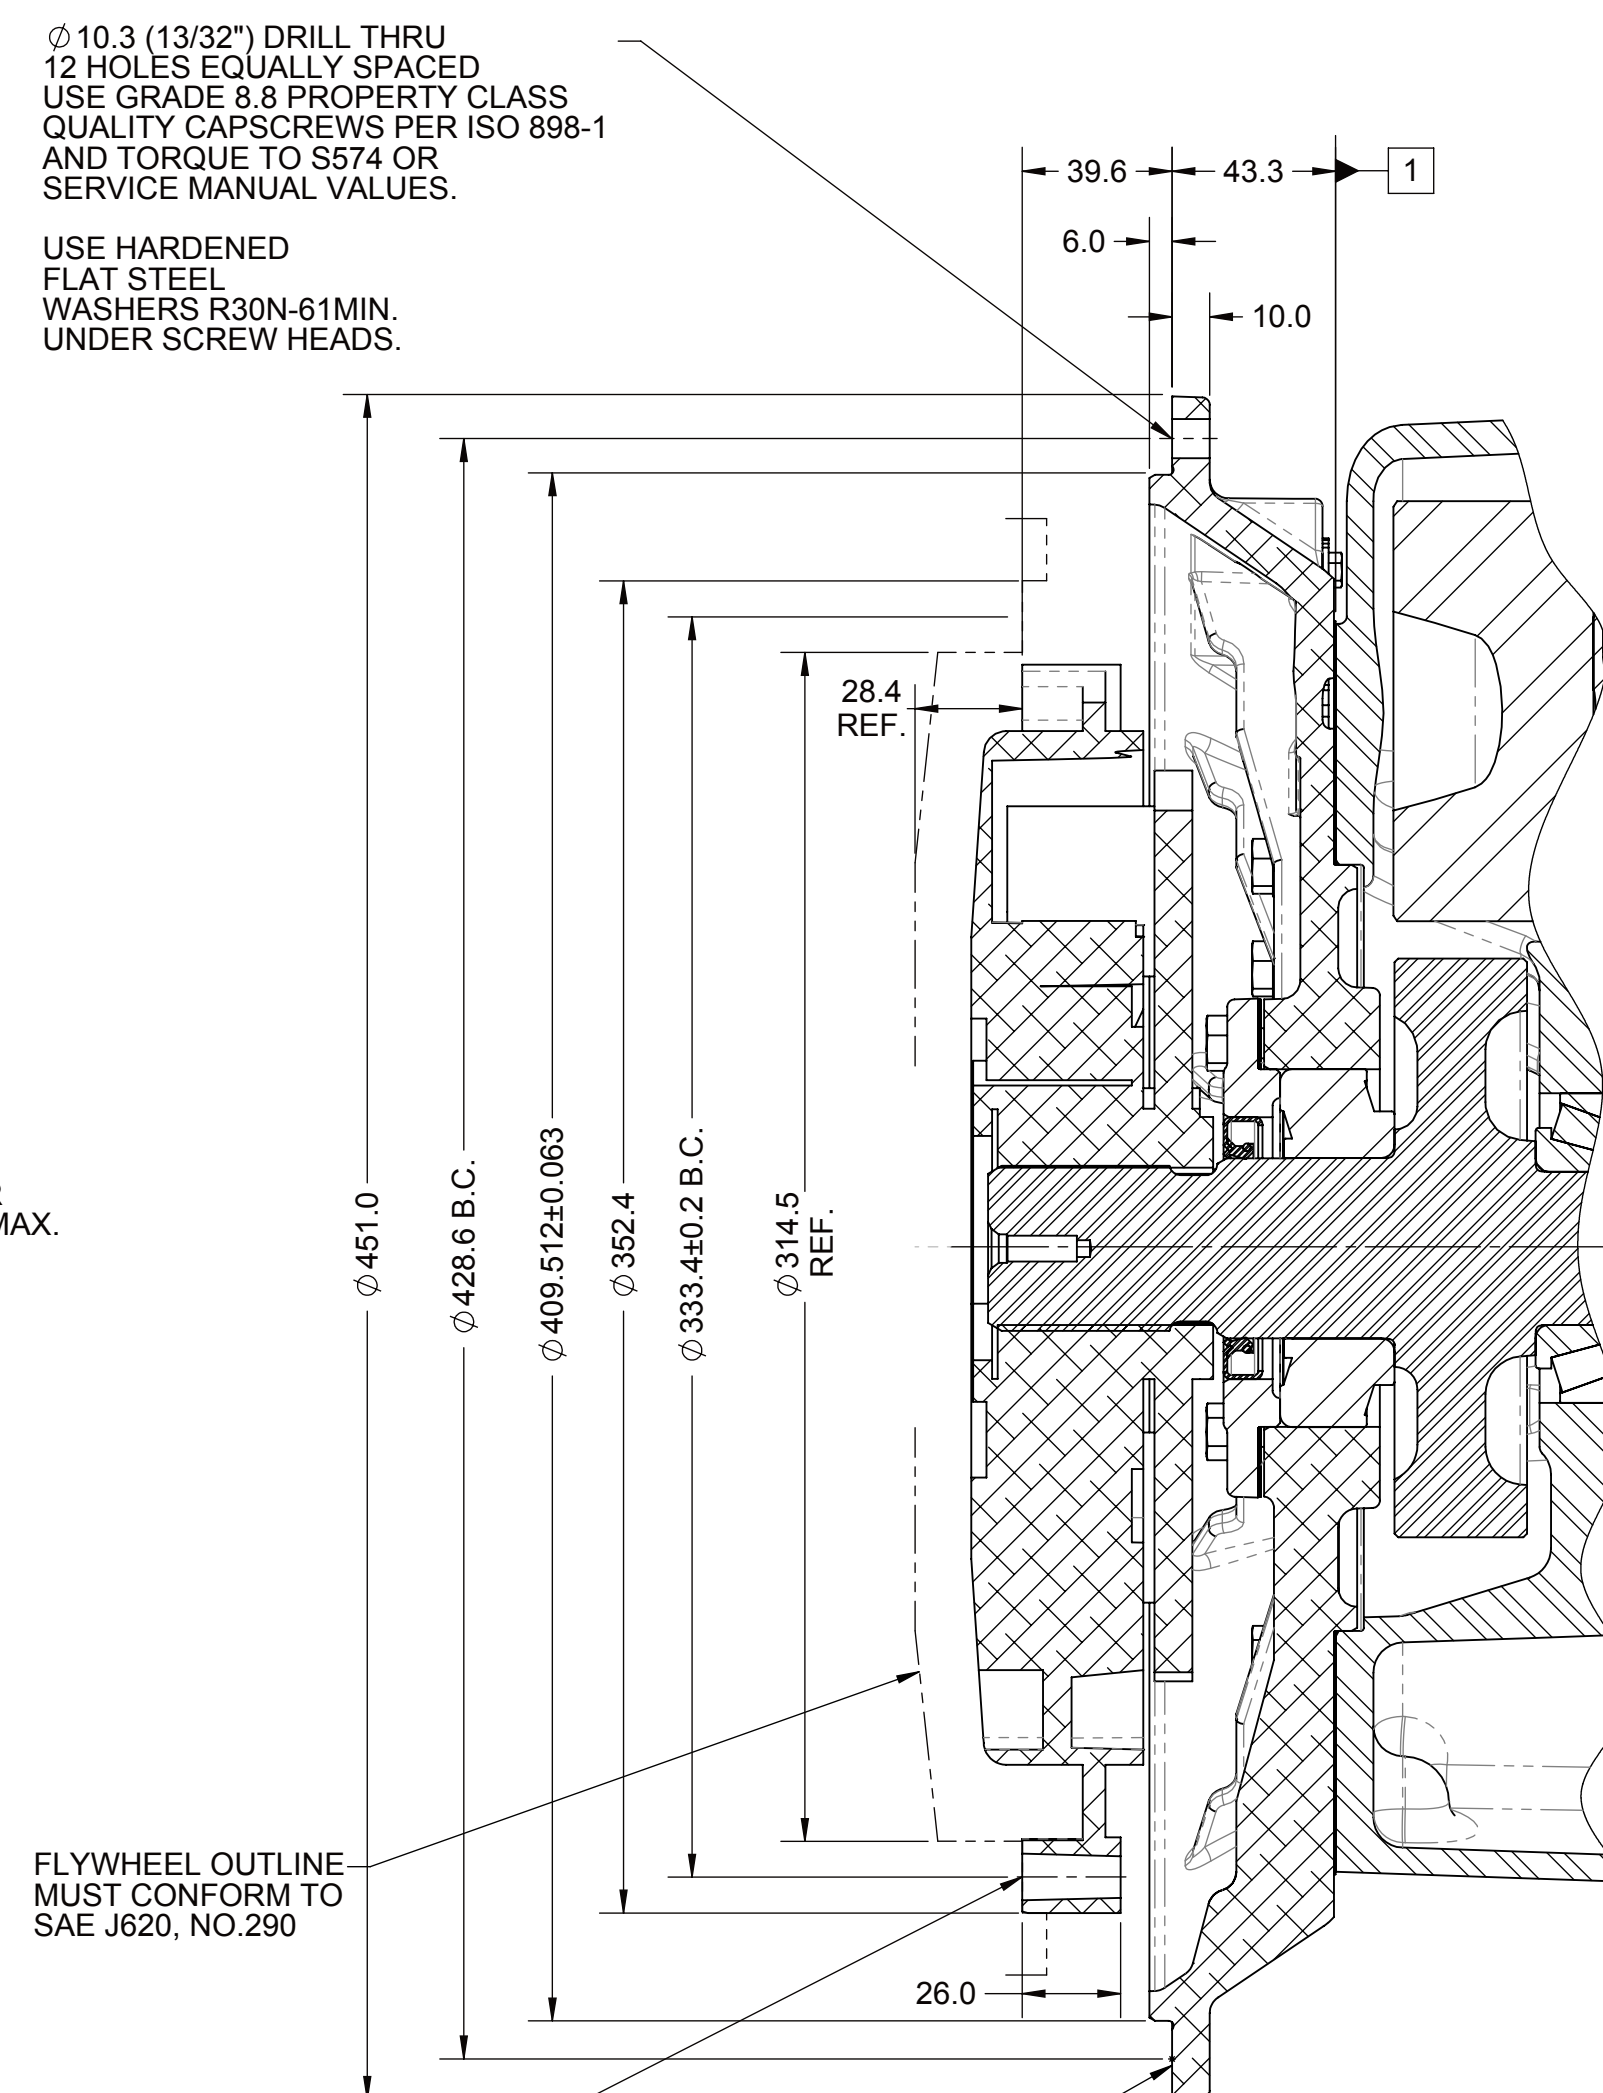

SECTION A-A

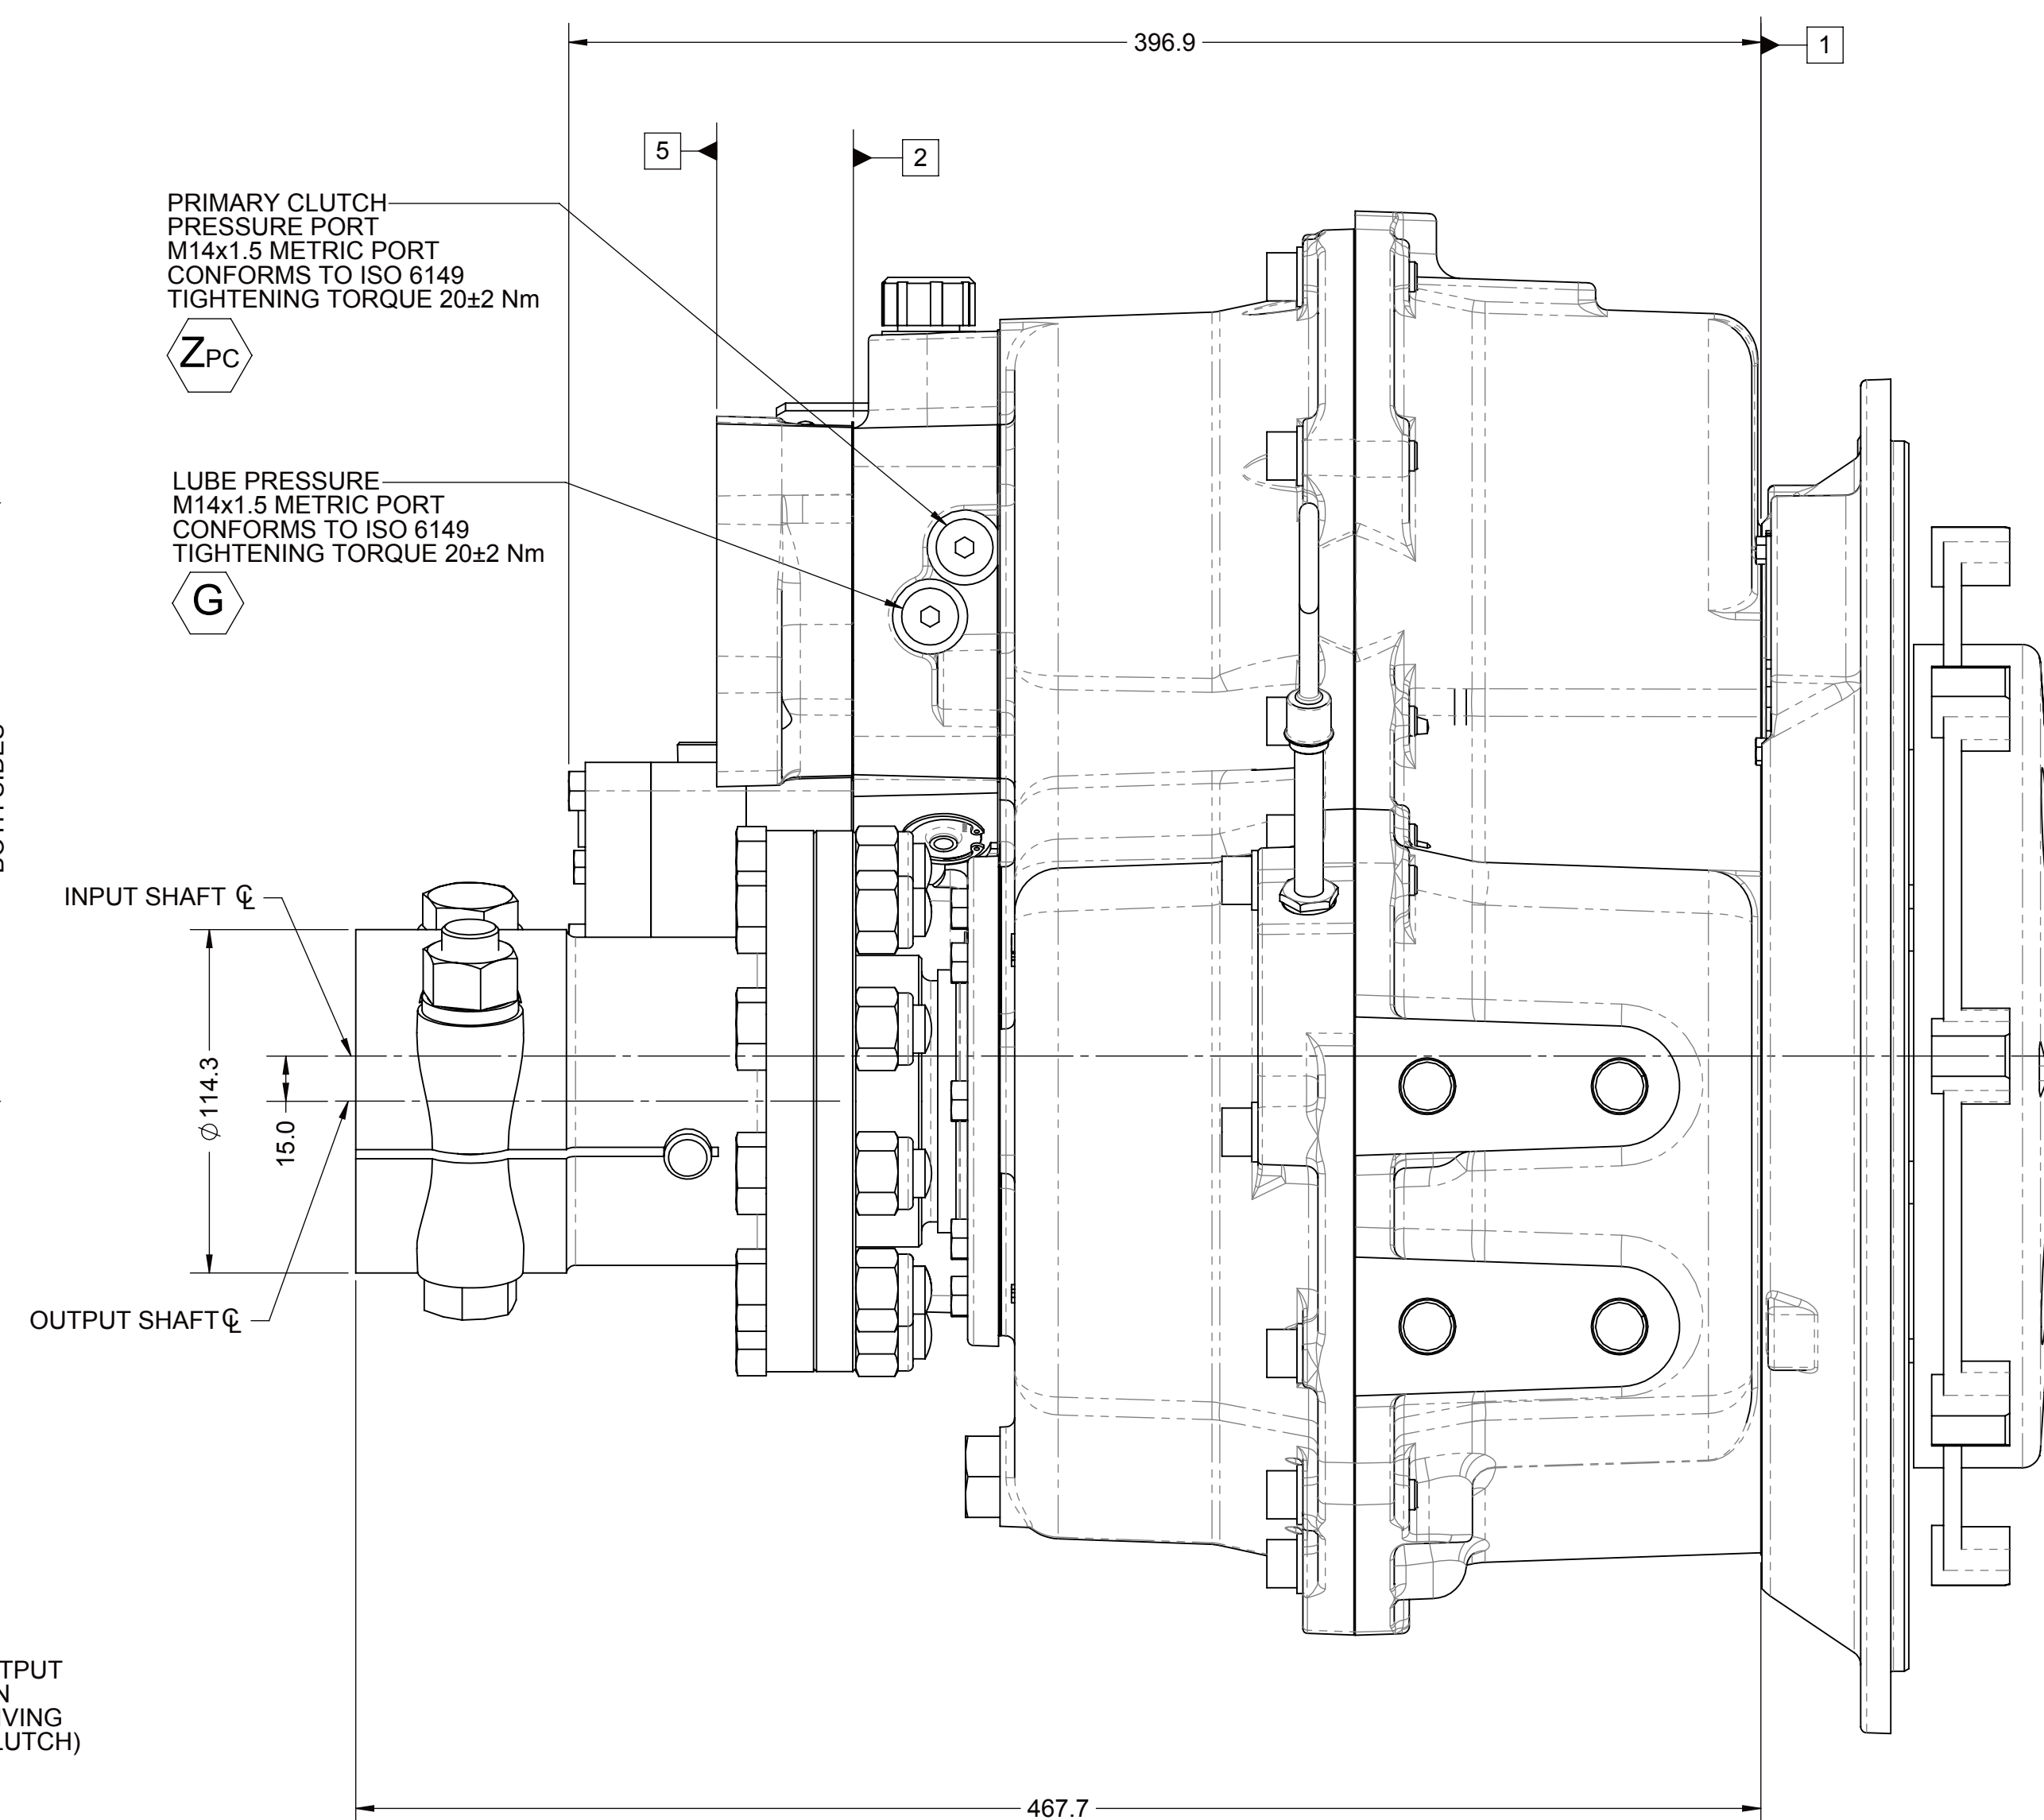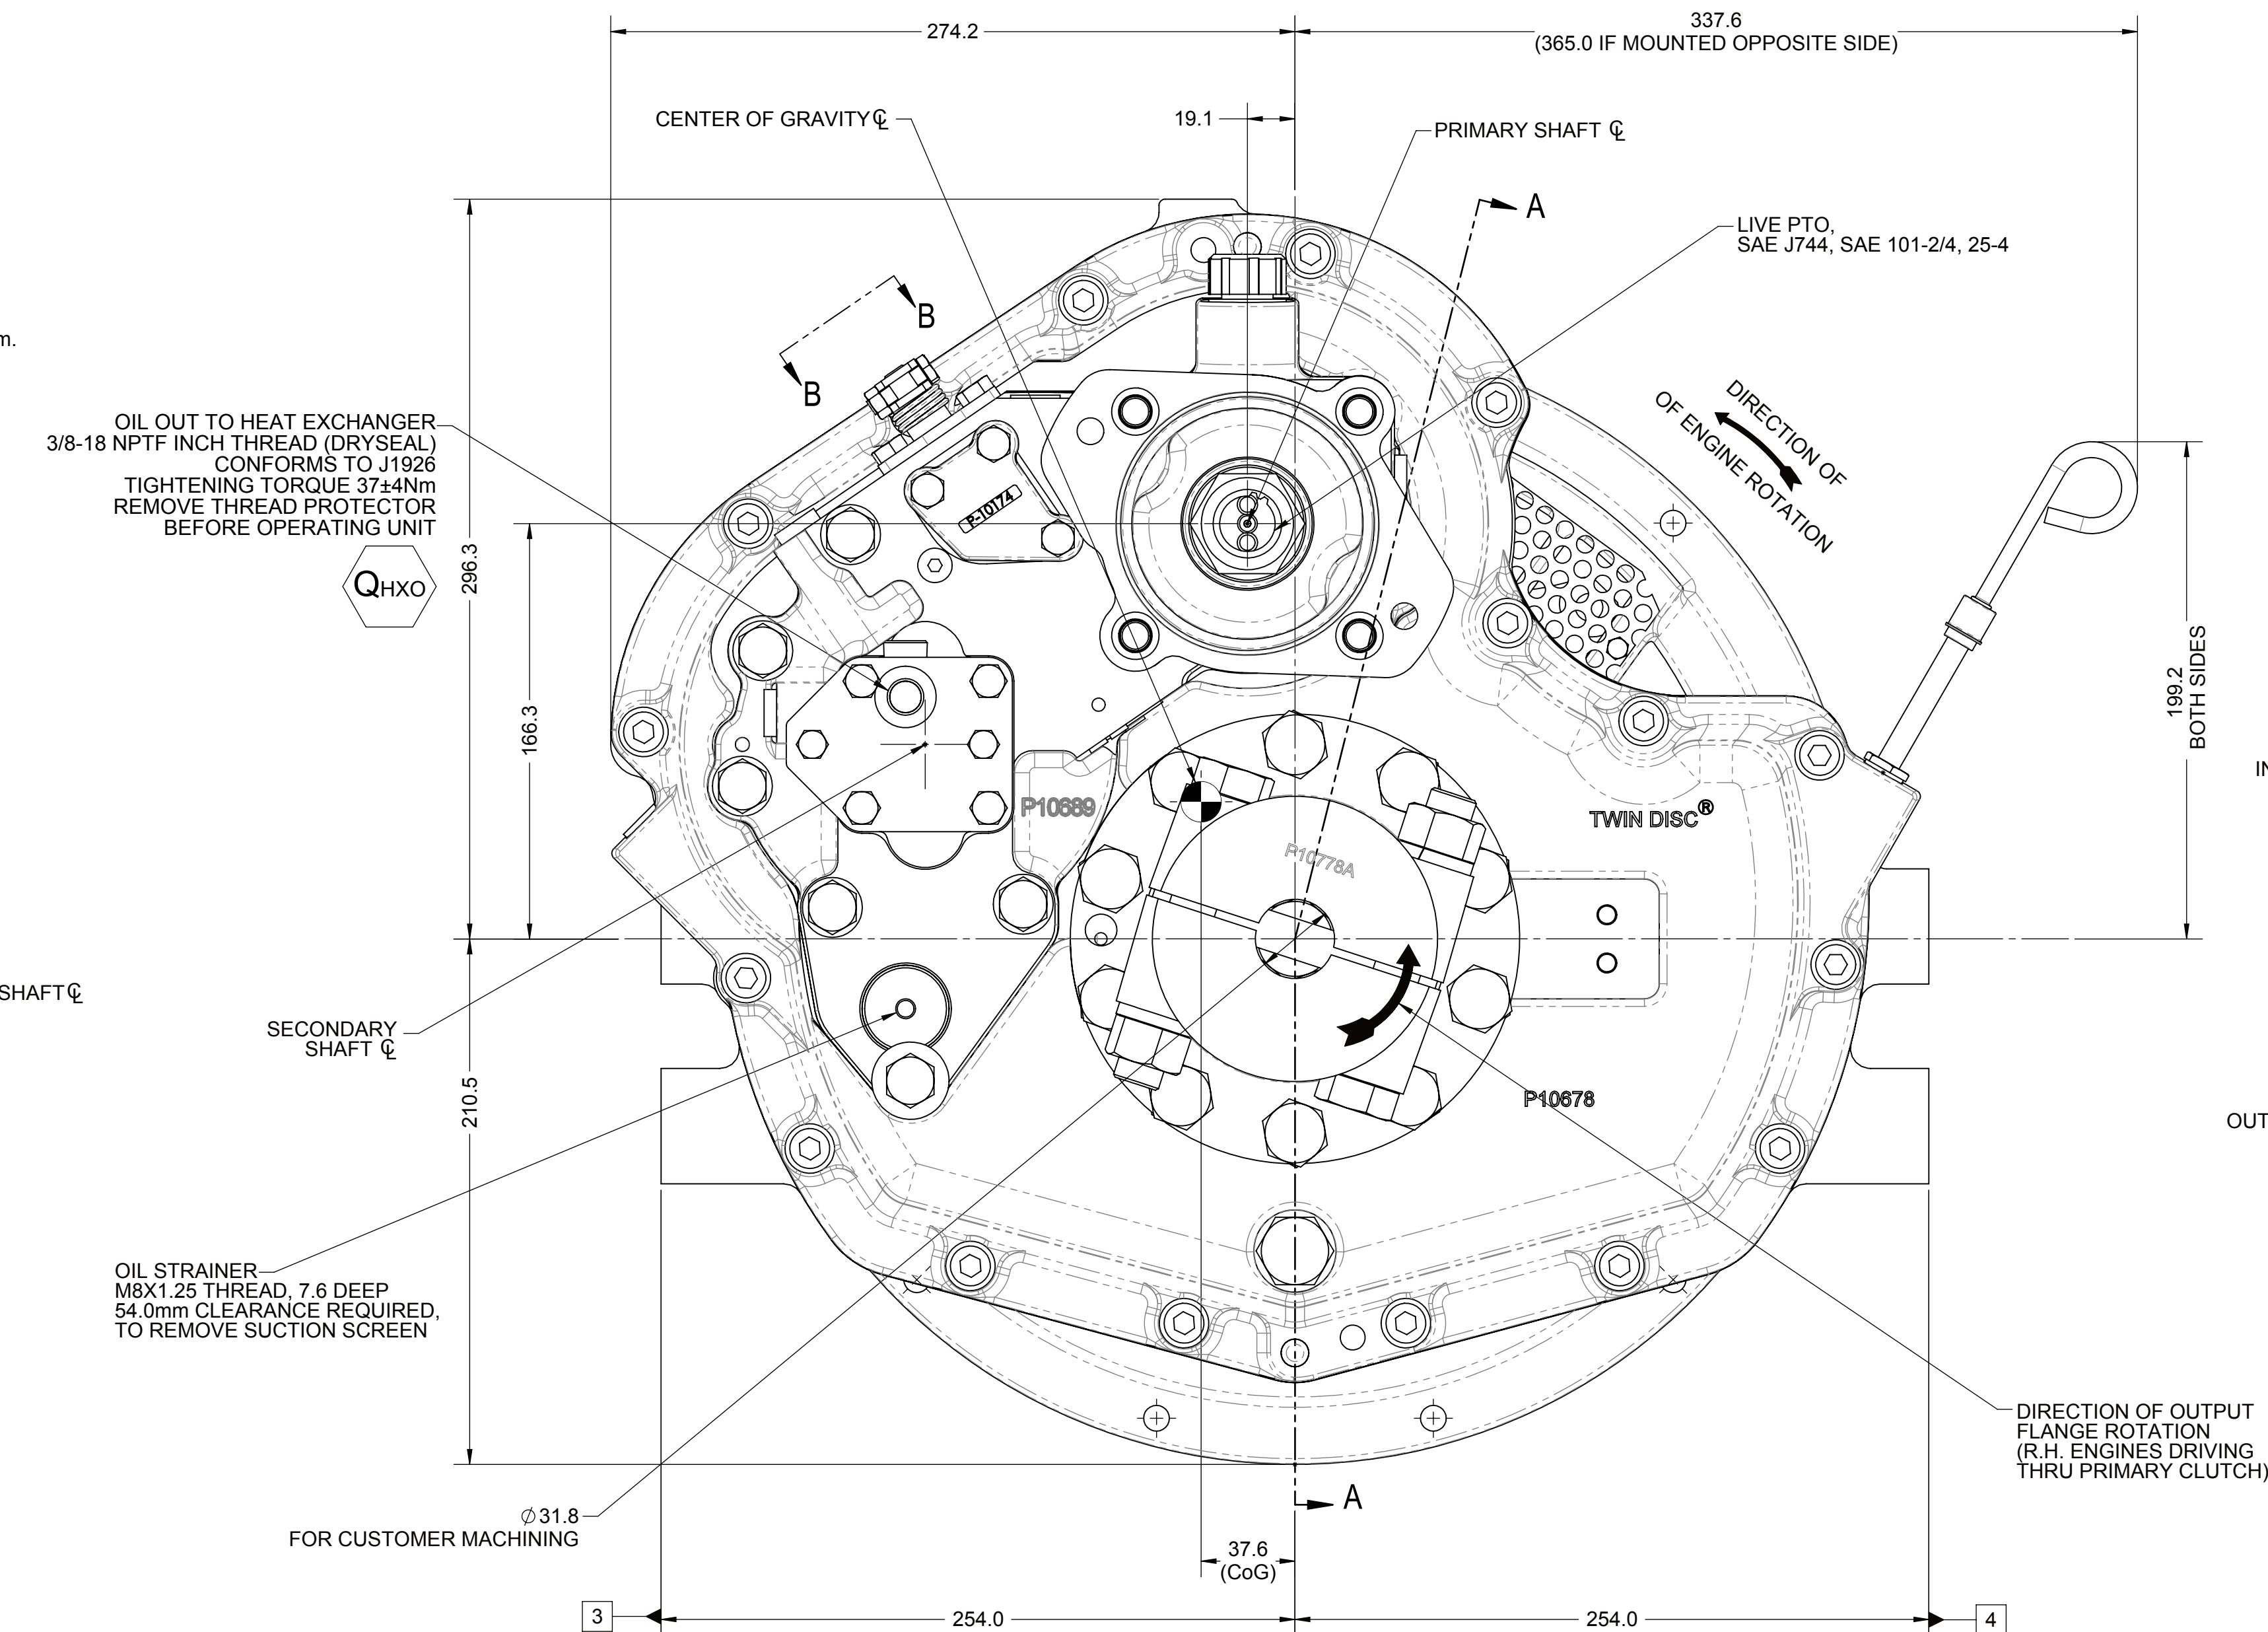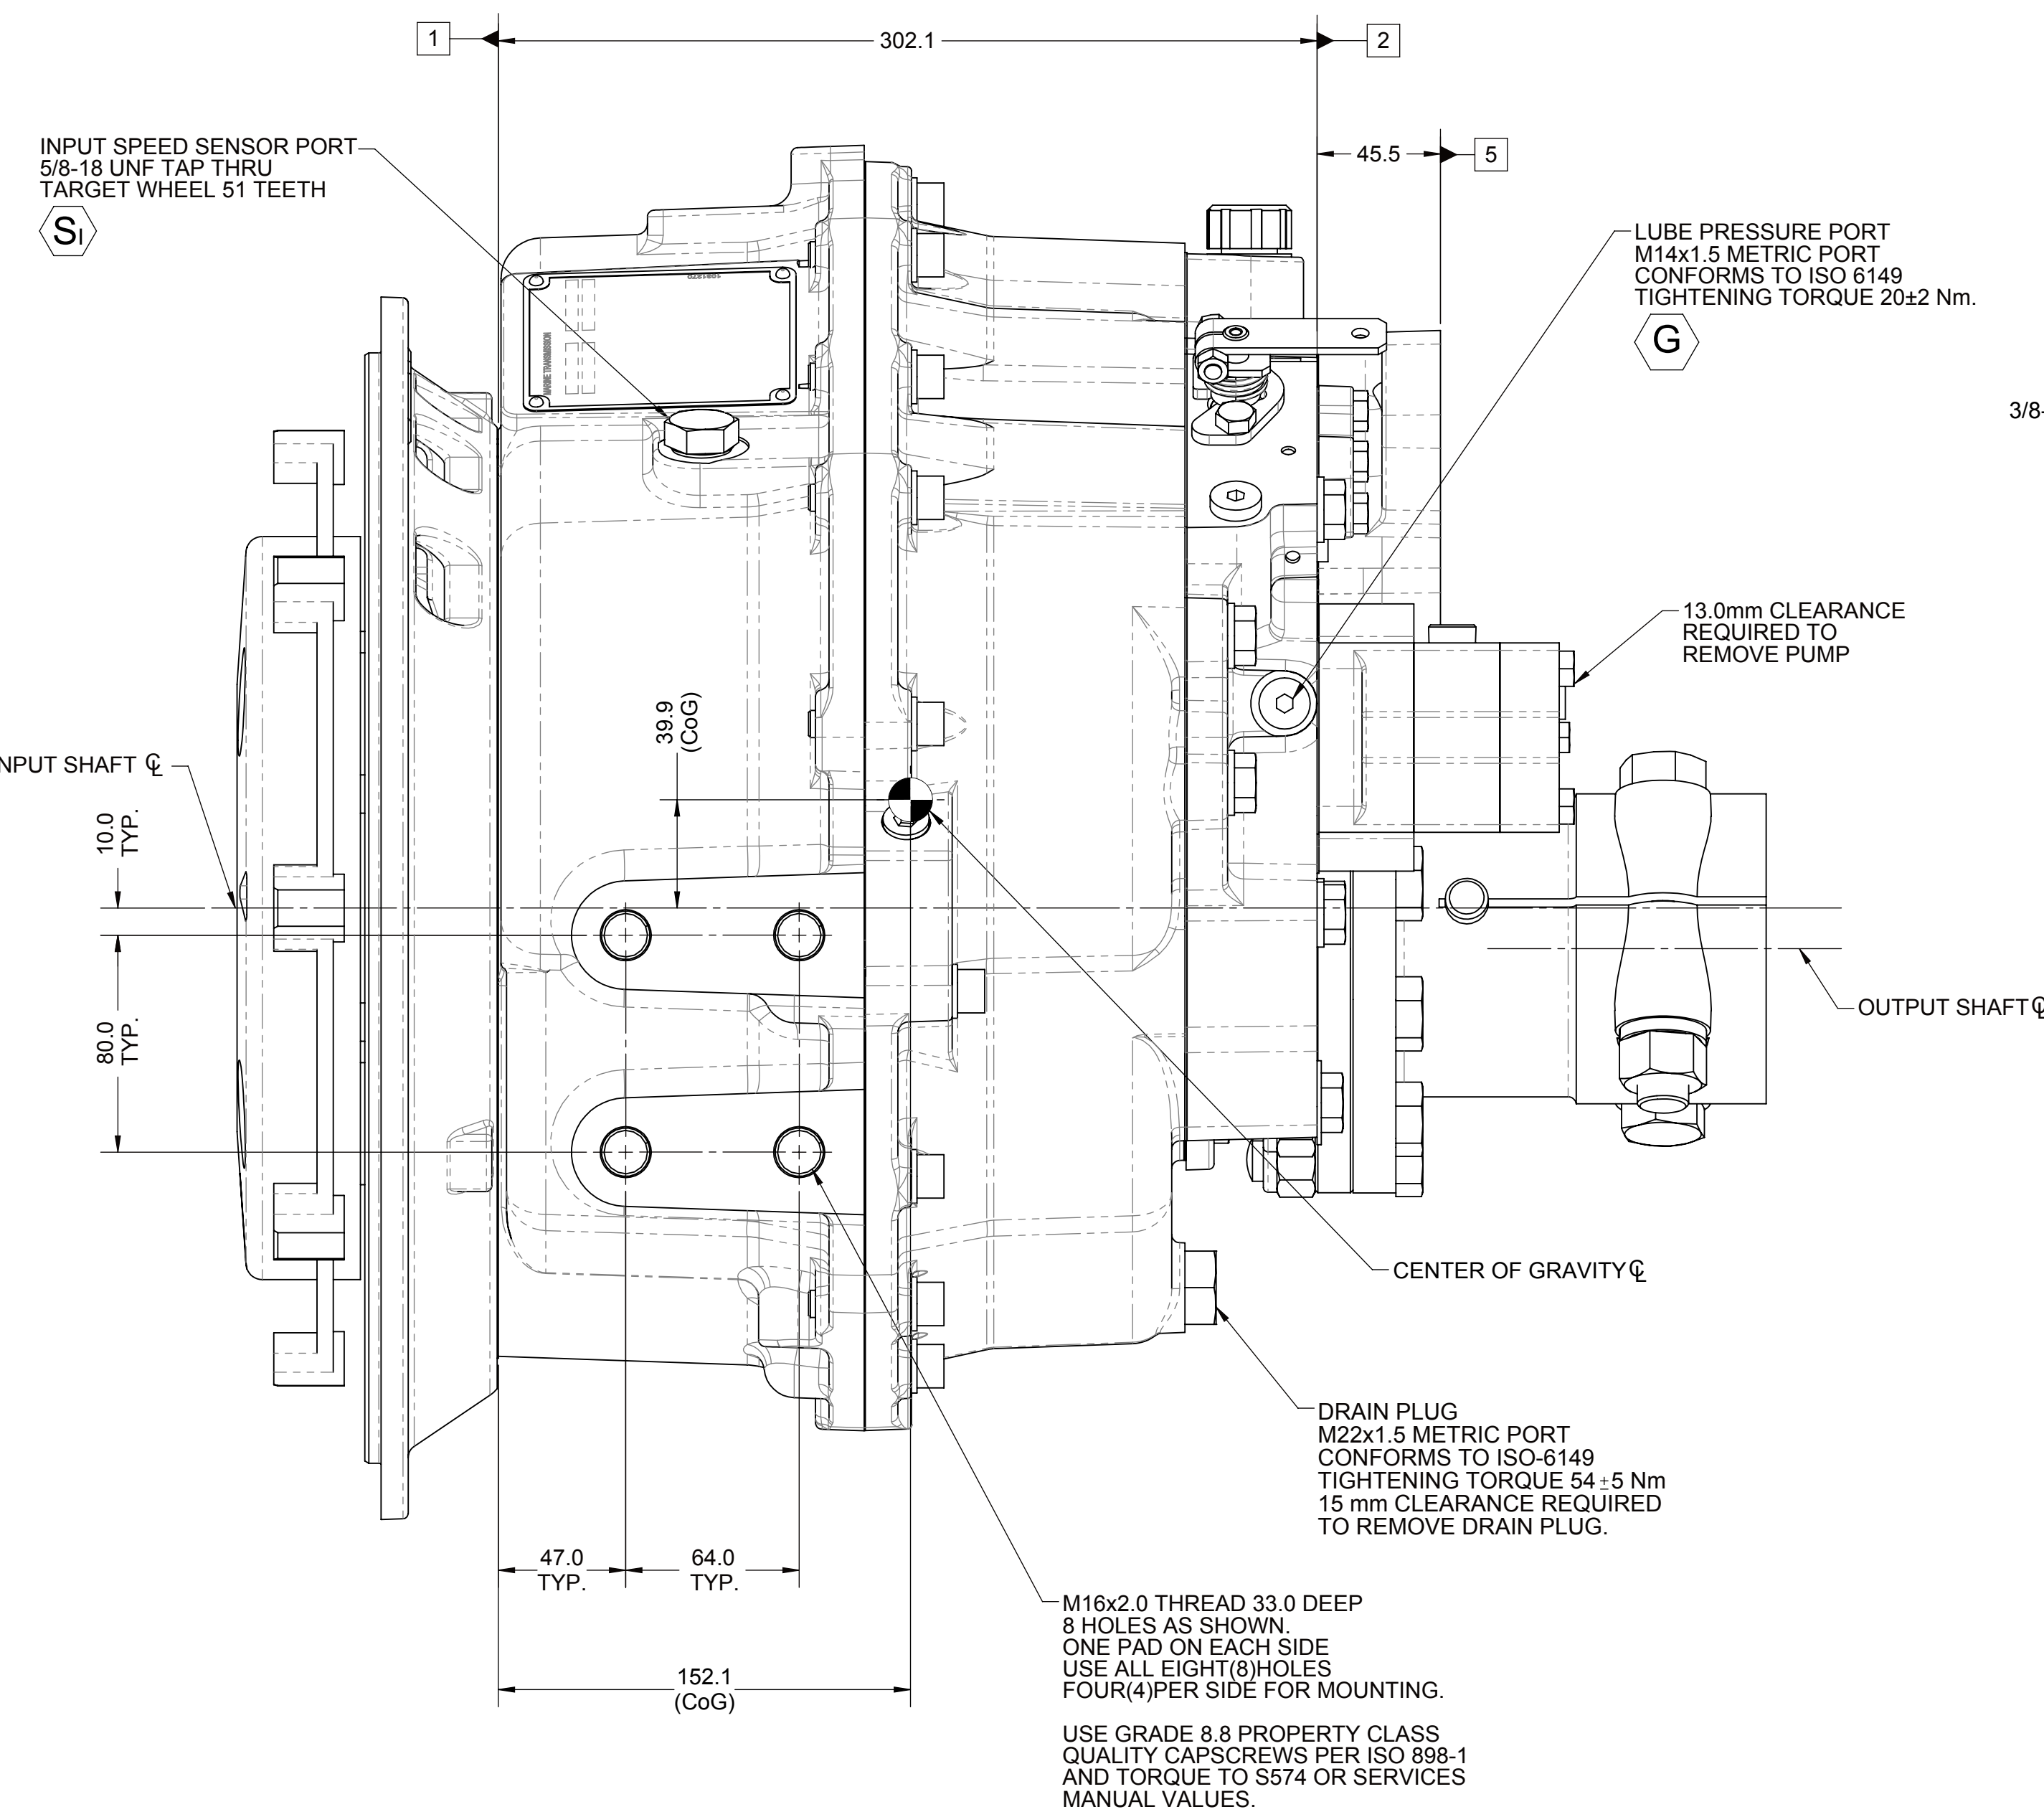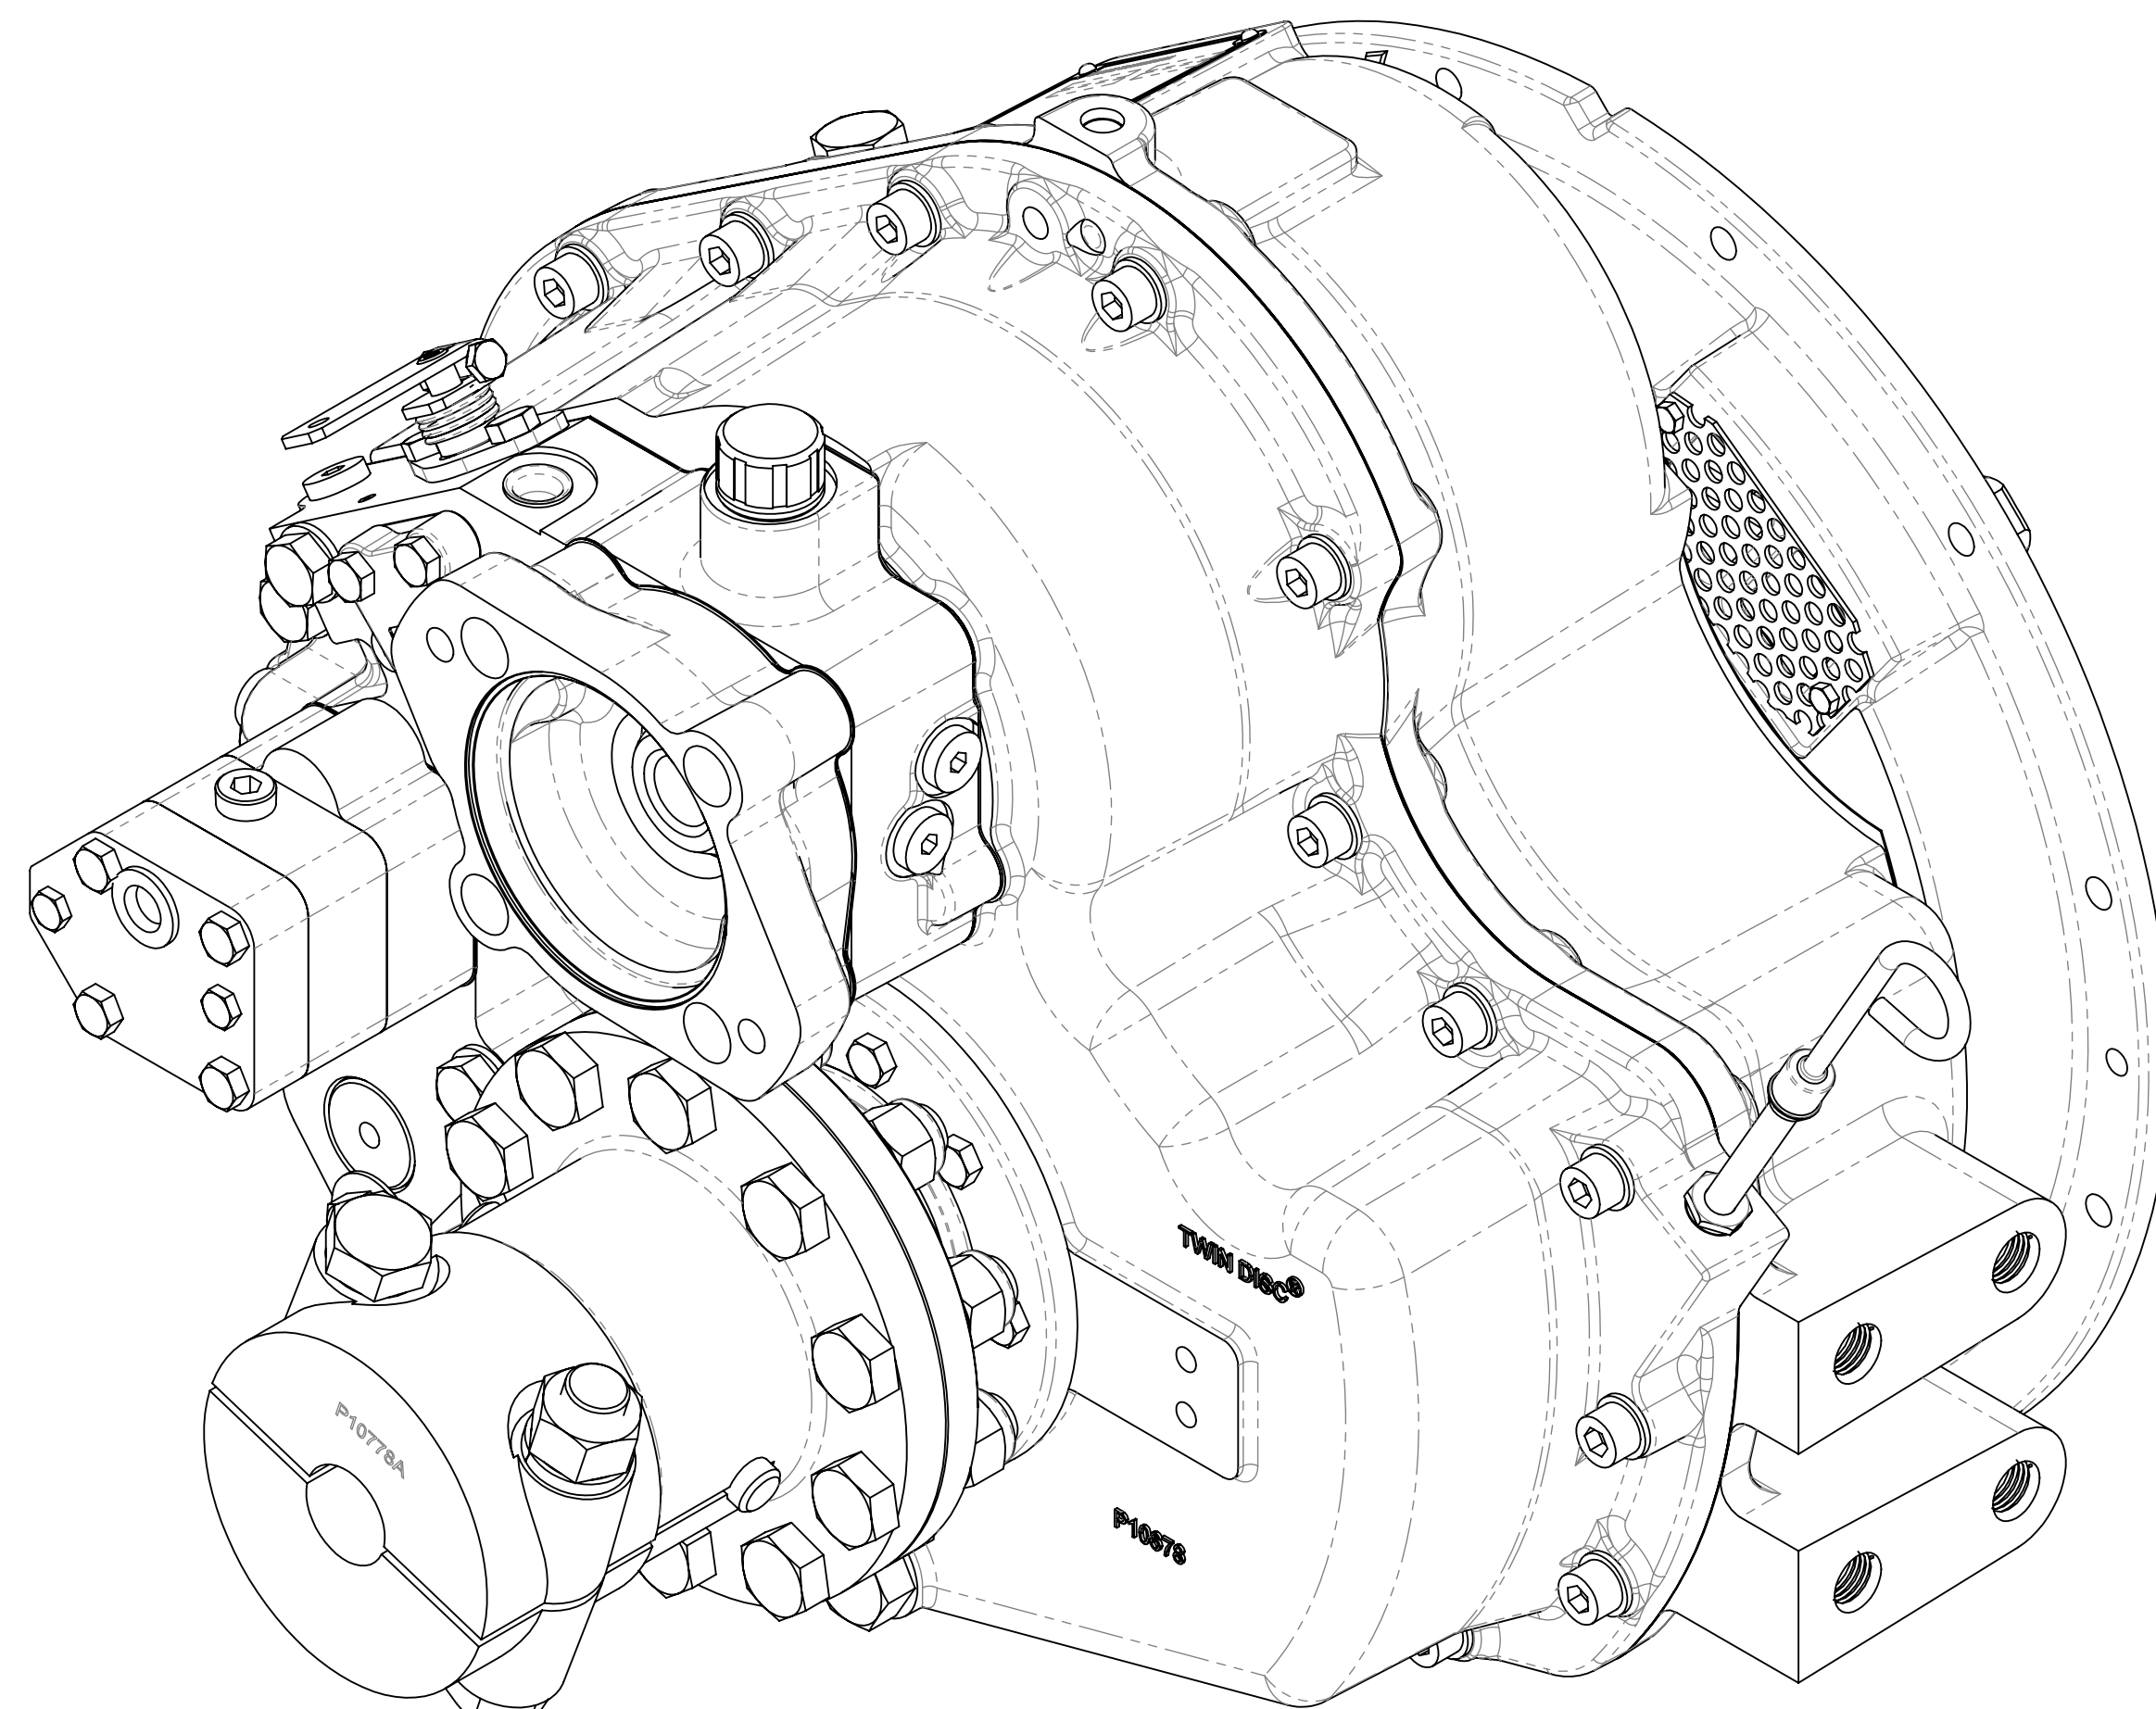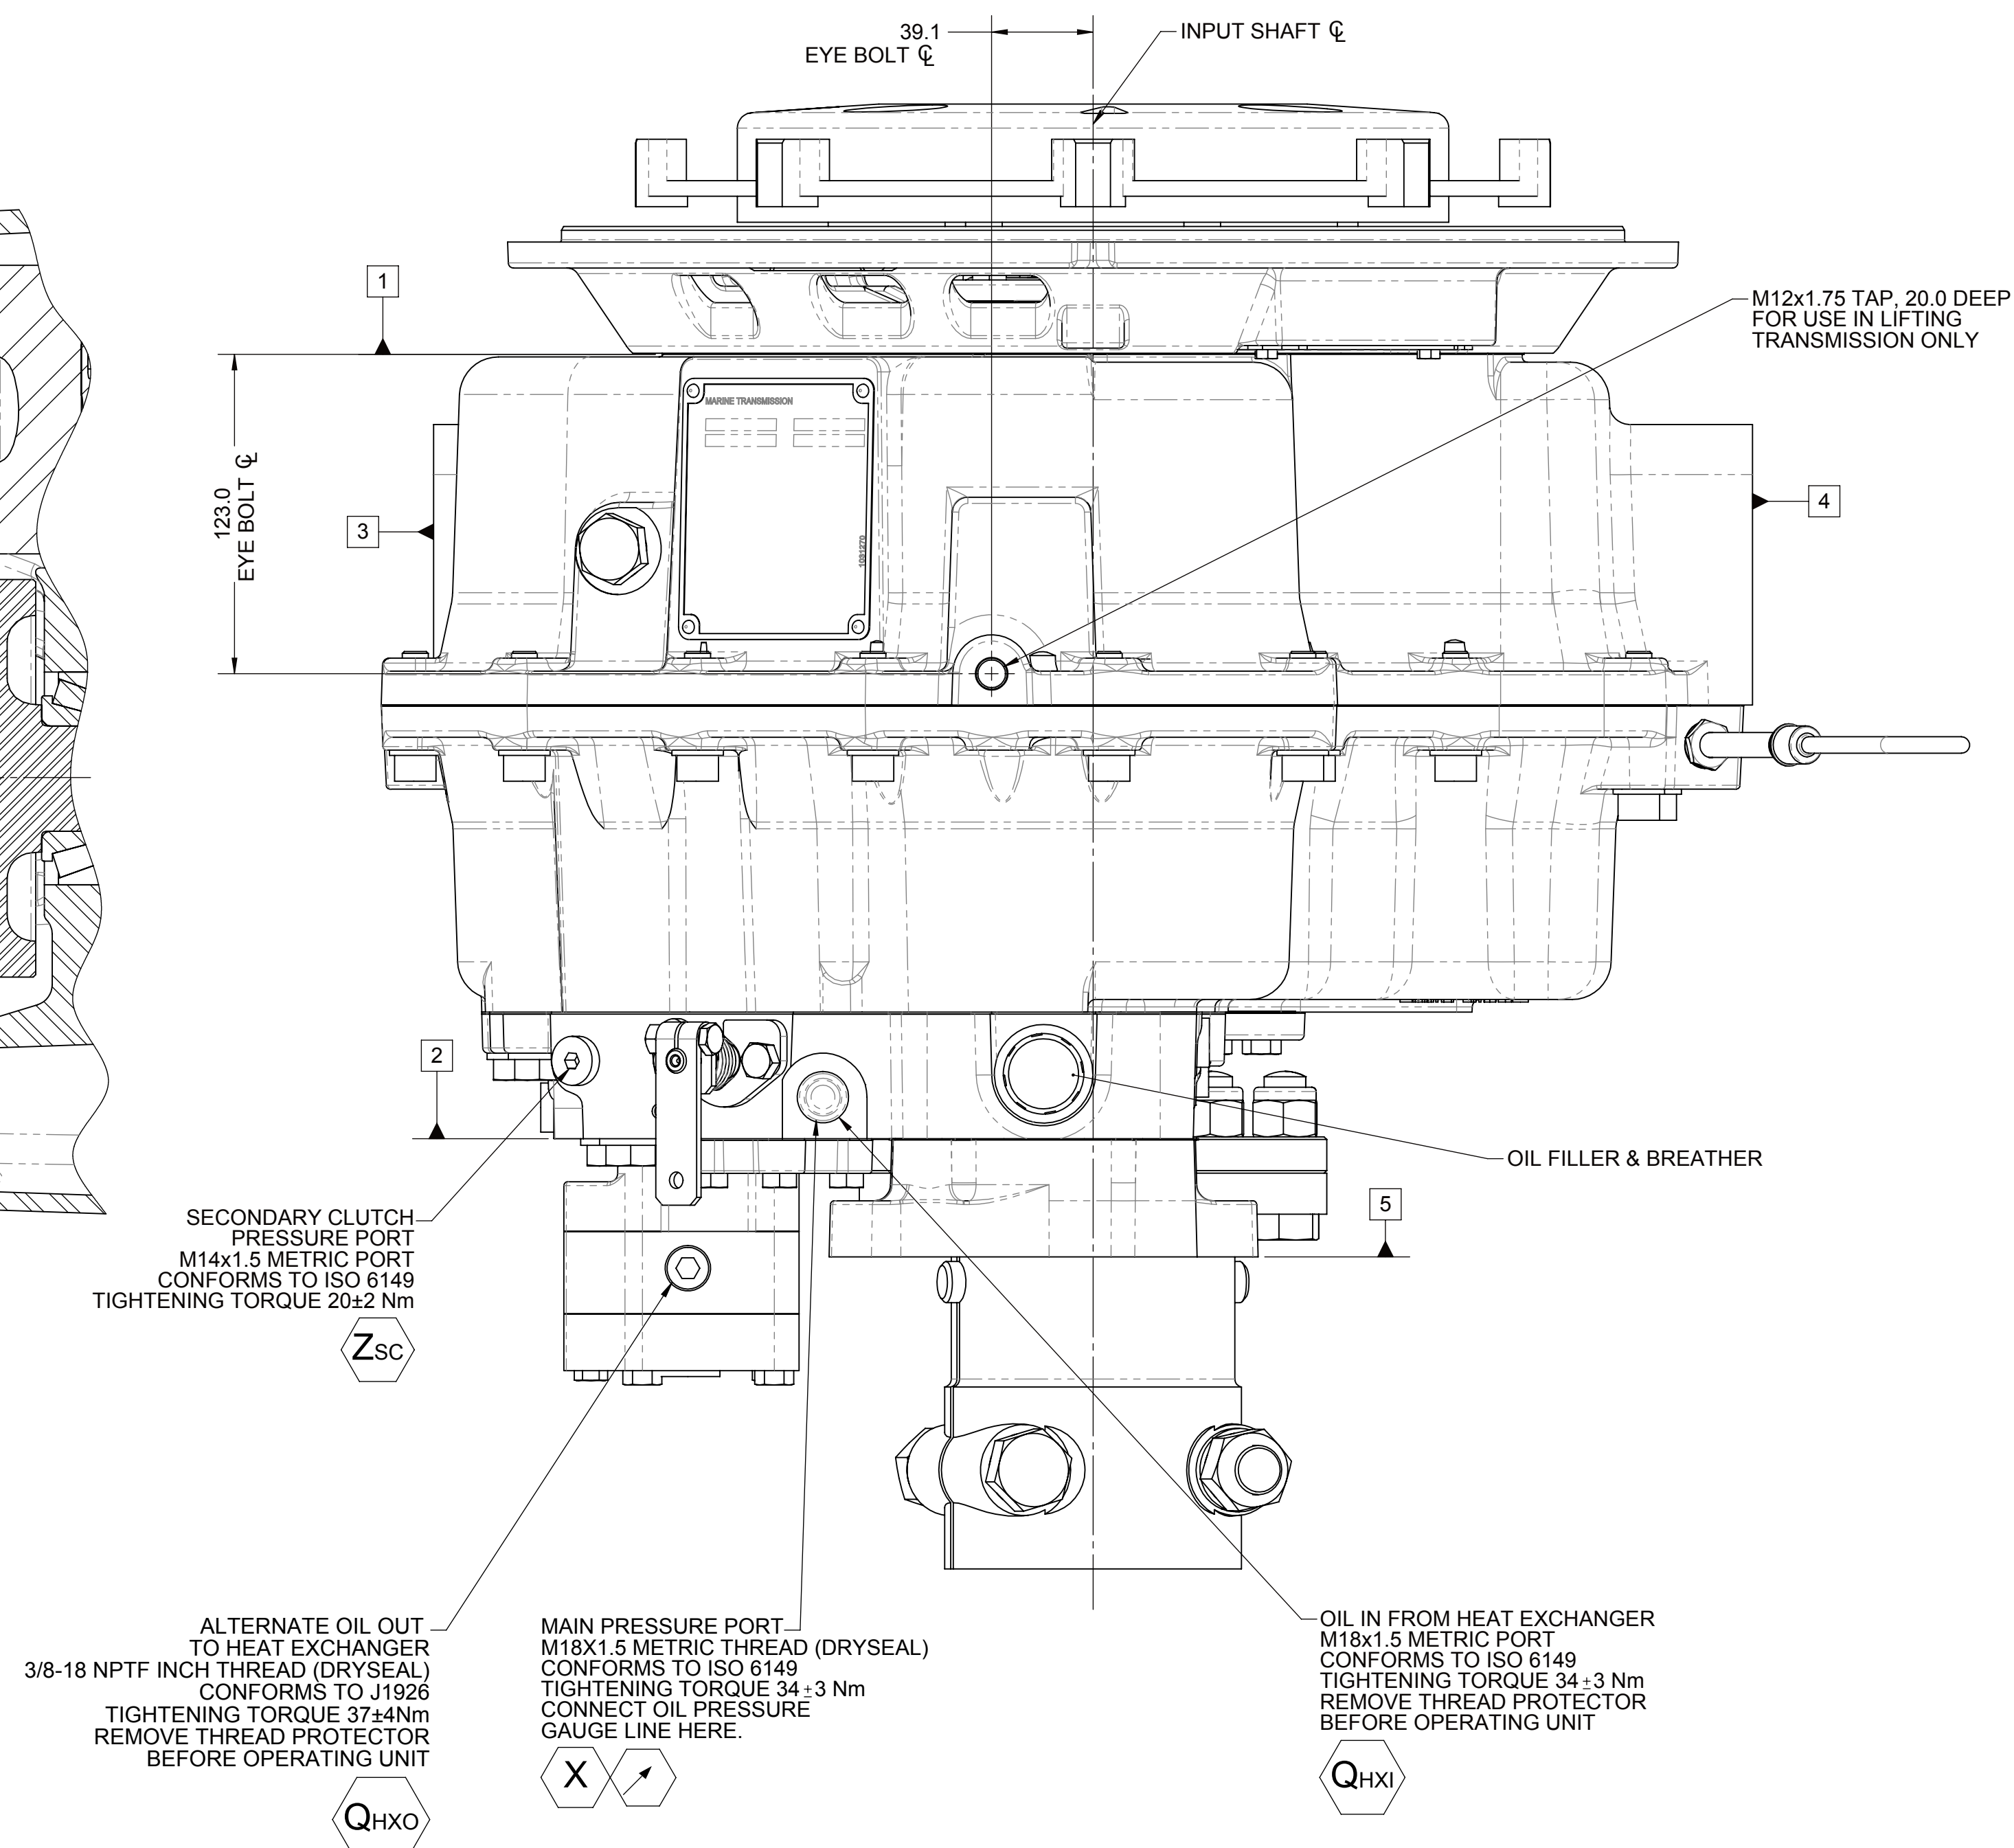

EQUIPMENT SHOWN:

EQUIPMENT SHOWN:

- MG-5075SC PER PX10680 ASSEMBLY
- SAE #3 ADAPTOR / SAE 290 CENTA CF-DS-45 INPUT COUPLING
- MECHANICAL VALVE
- LIVE PTO, SAE J744, SAE 101-2/4, 25-4
- COMPANION FLANGE FOR GWB 587/42

FIRST USE ASSEMBLY: FIRST USE MODEL: SUBMIT TO:		UNIT: 140mm		MATERIAL: HEAT TREAT:	DATE: 4/3/2019 TITLE:	REV: NDWF-010306 CHANGE NO. DATE	04/04/2019	
METRIC		UNLESS OTHERWISE SPECIFIED: A 10 B 12.5 C 12.5 D 12.5 E 12.5 F 12.5 G 12.5 H 12.5 K 12.5 L 12.5 M 12.5 N 12.5 P 12.5 Q 12.5 R 12.5 S 12.5 T 12.5 U 12.5 V 12.5 W 12.5 X 12.5 Y 12.5 Z 12.5 ALL ANGULAR MEASUREMENTS SHALL BE IN DEGREES UNLESS OTHERWISE SPECIFIED PER ASME Y14.5M		DESCRIPTION: INSTALLATION MG-507SSC	DRAWN BY: L2 CHECKED BY: J2 APPROVED BY: DV	 RACINE, WI 53400 - USA 1026311J	DWG NO: A0 SHEET: 1 OF 1 REV:	
NOTICE: THIS DRAWING IS THE PROPERTY OF TWIN DISC CORPORATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM TWIN DISC CORPORATION. PERMISSION IS GRANTED TO THE U.S. GOVERNMENT BY OTHERS BY CONTRACT.								