

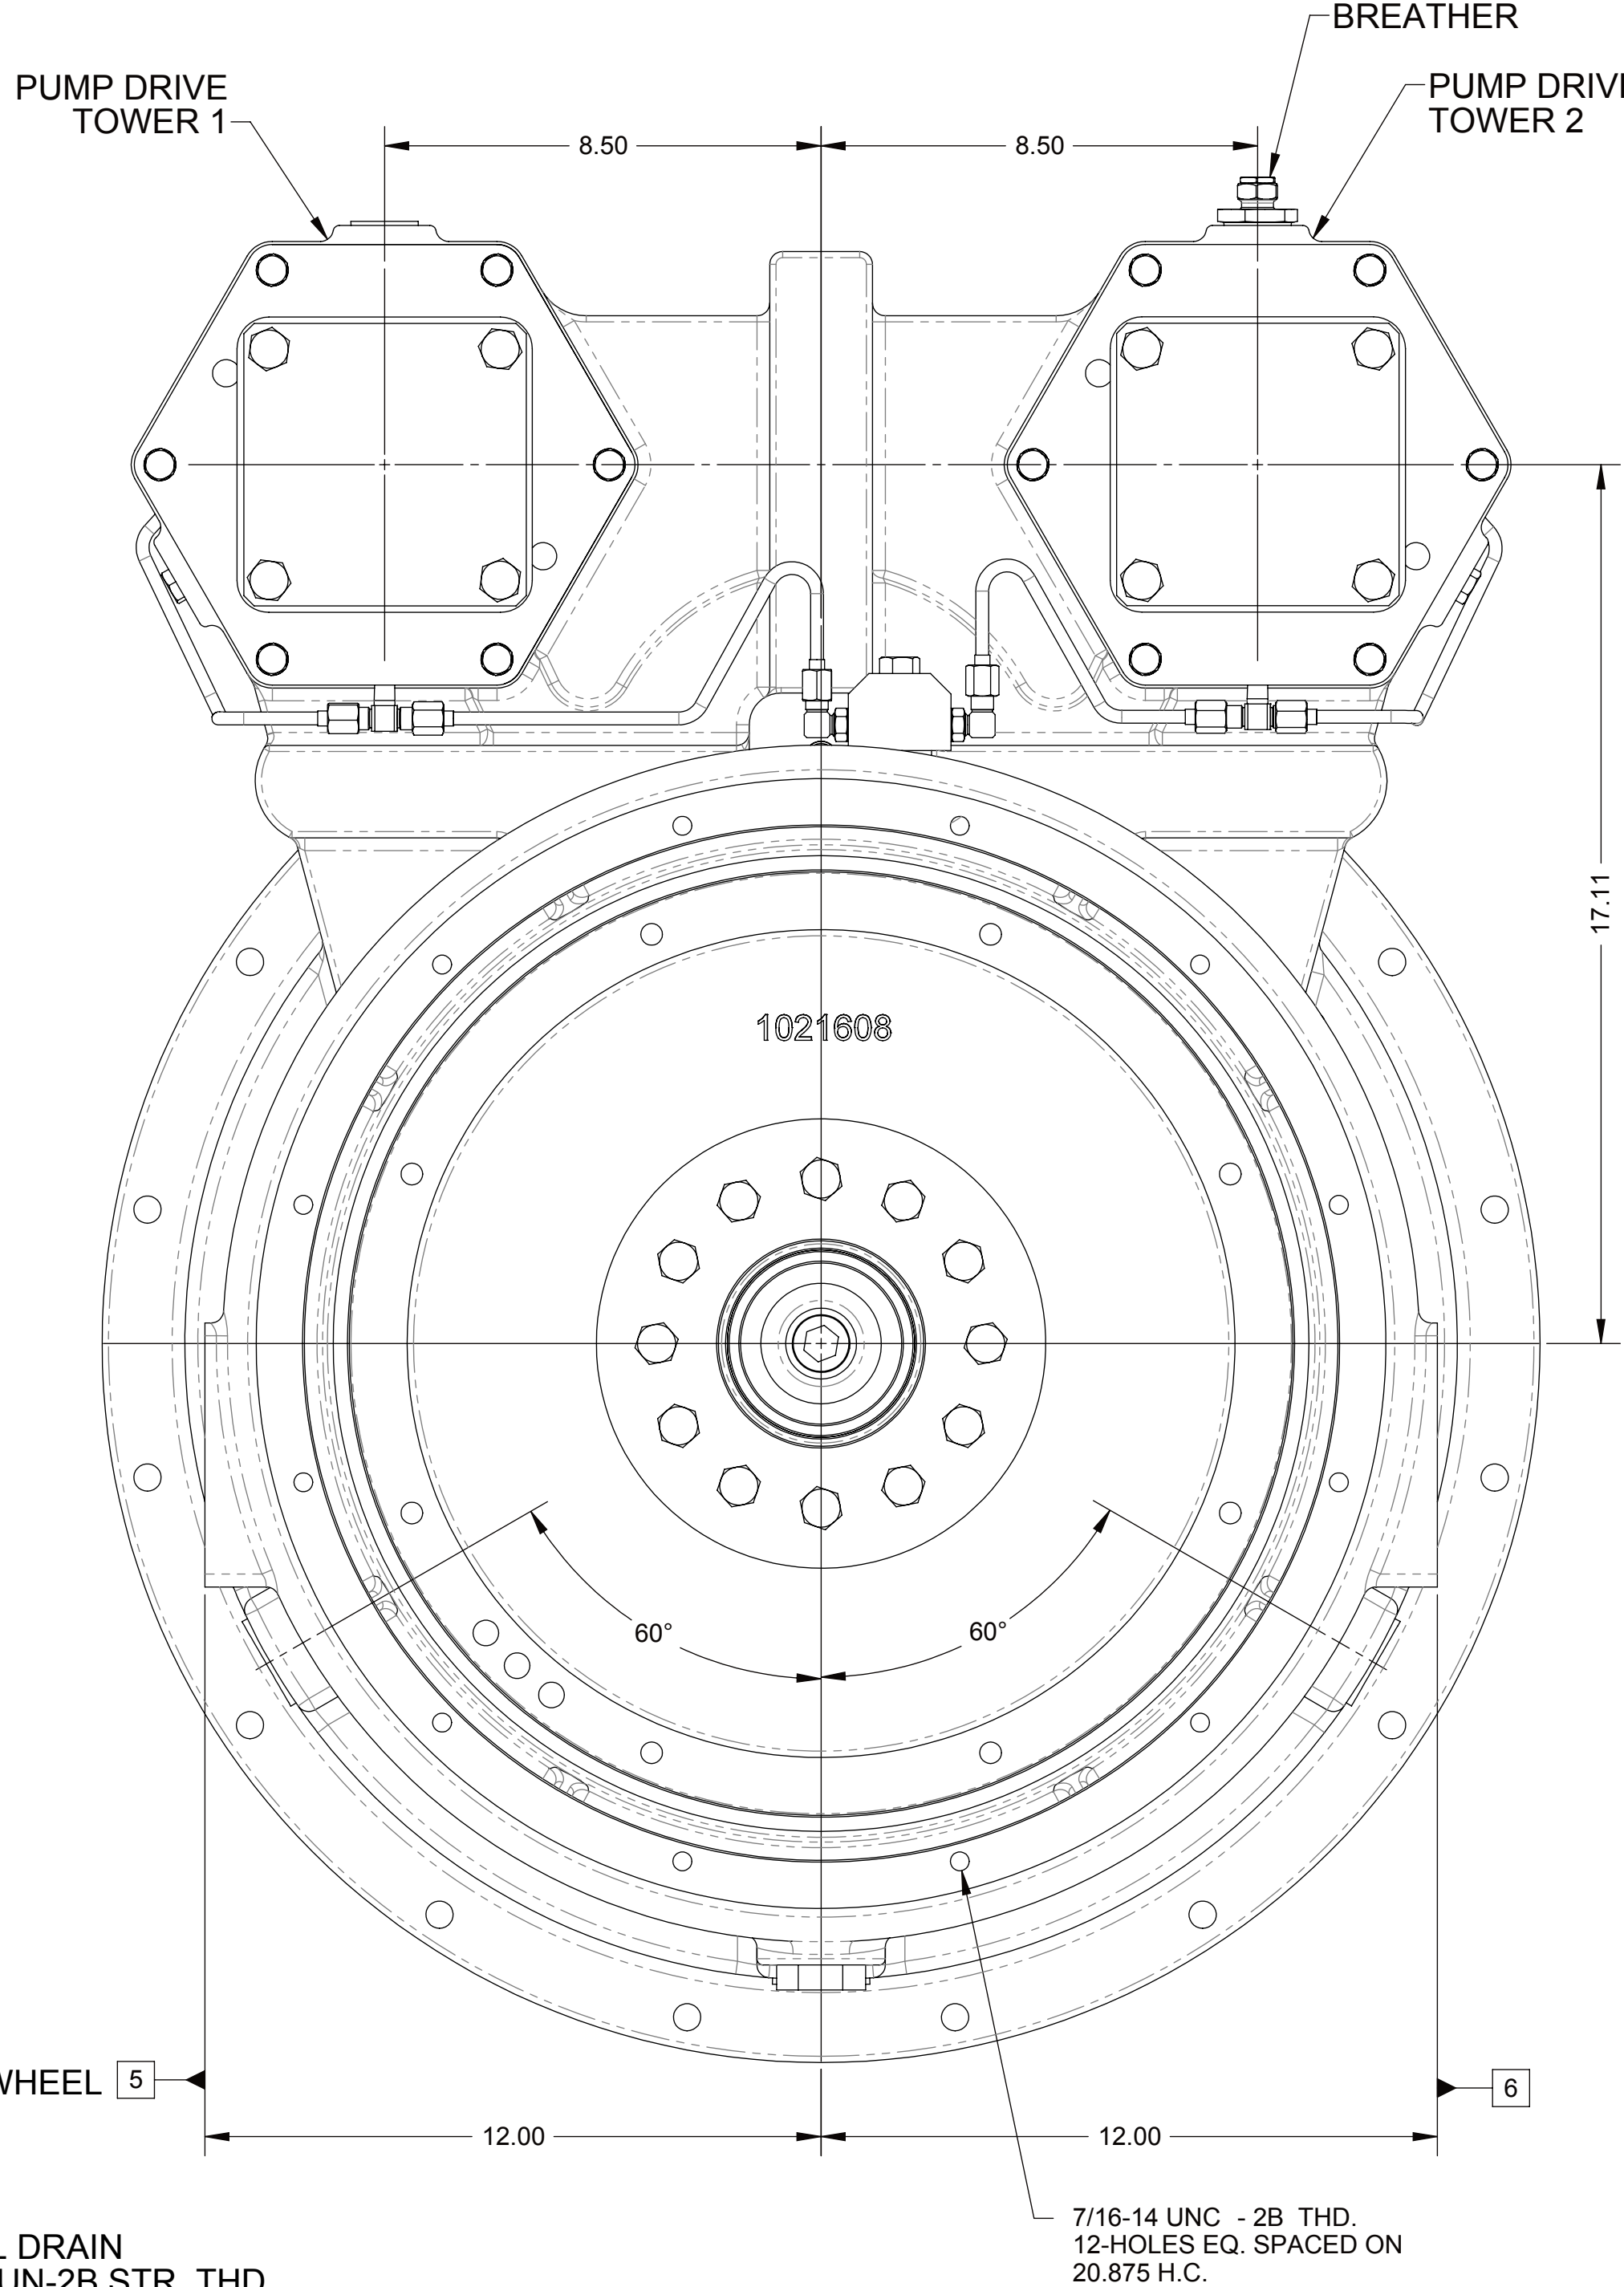
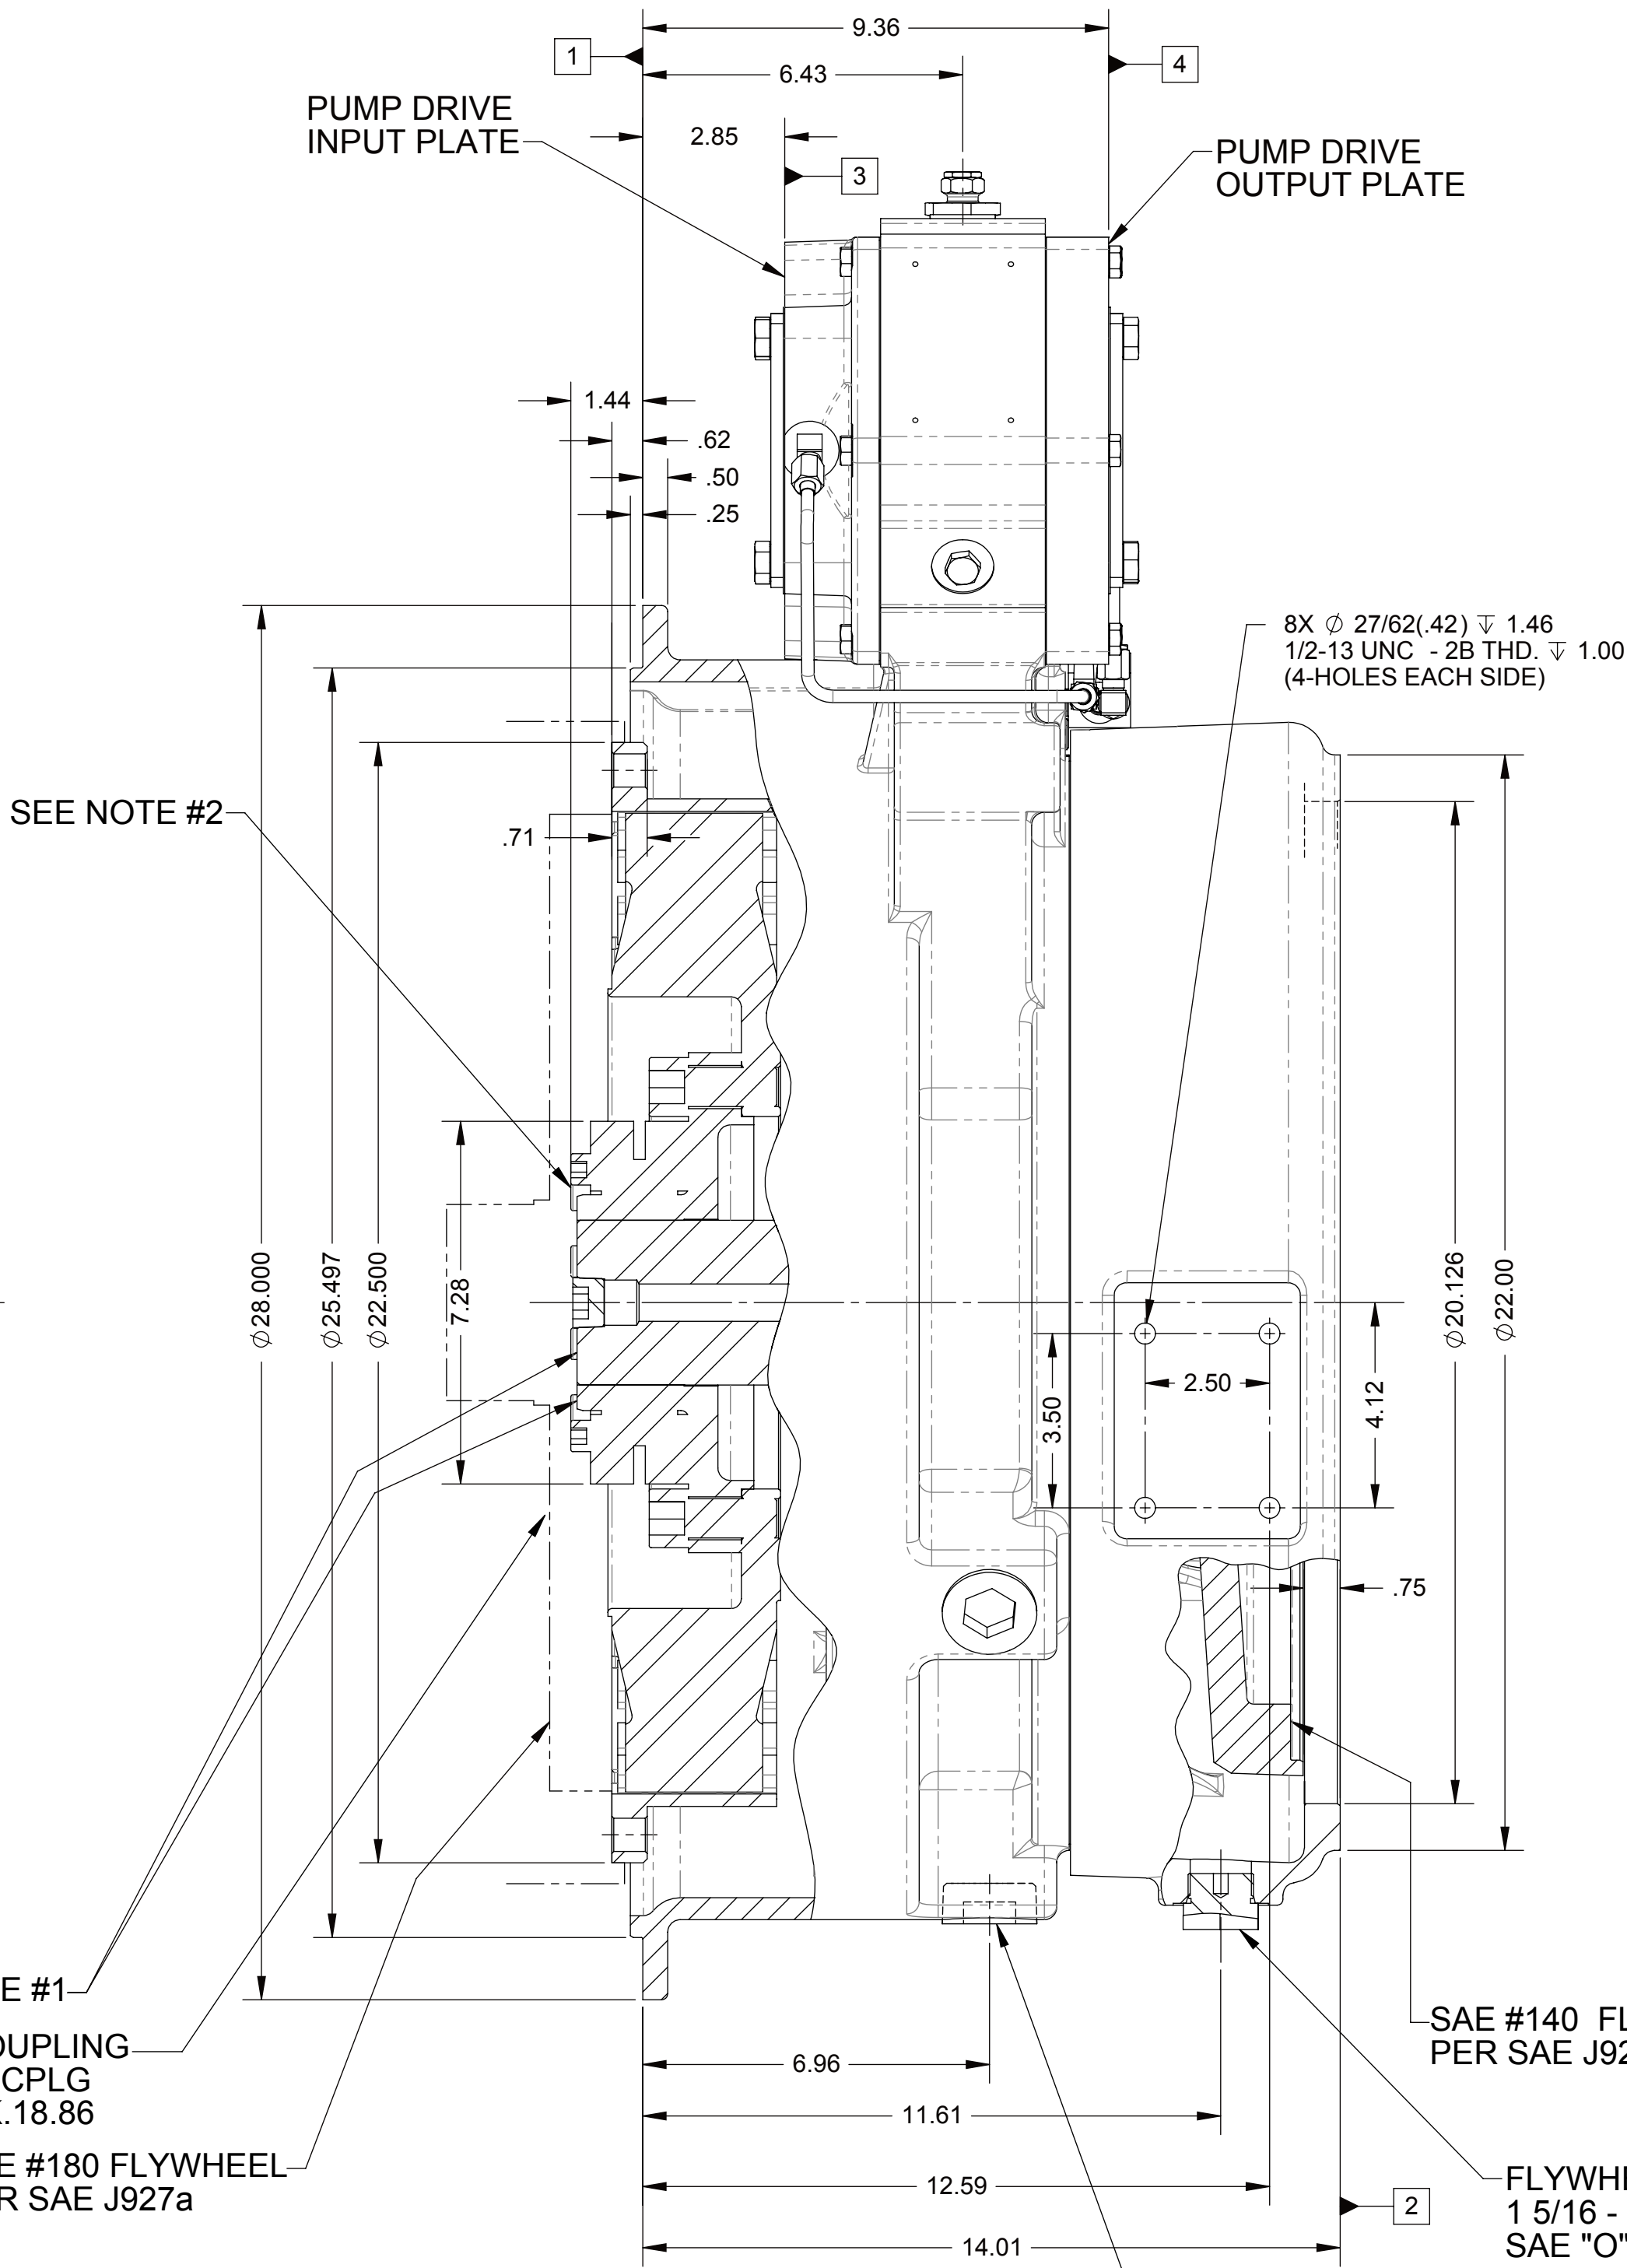


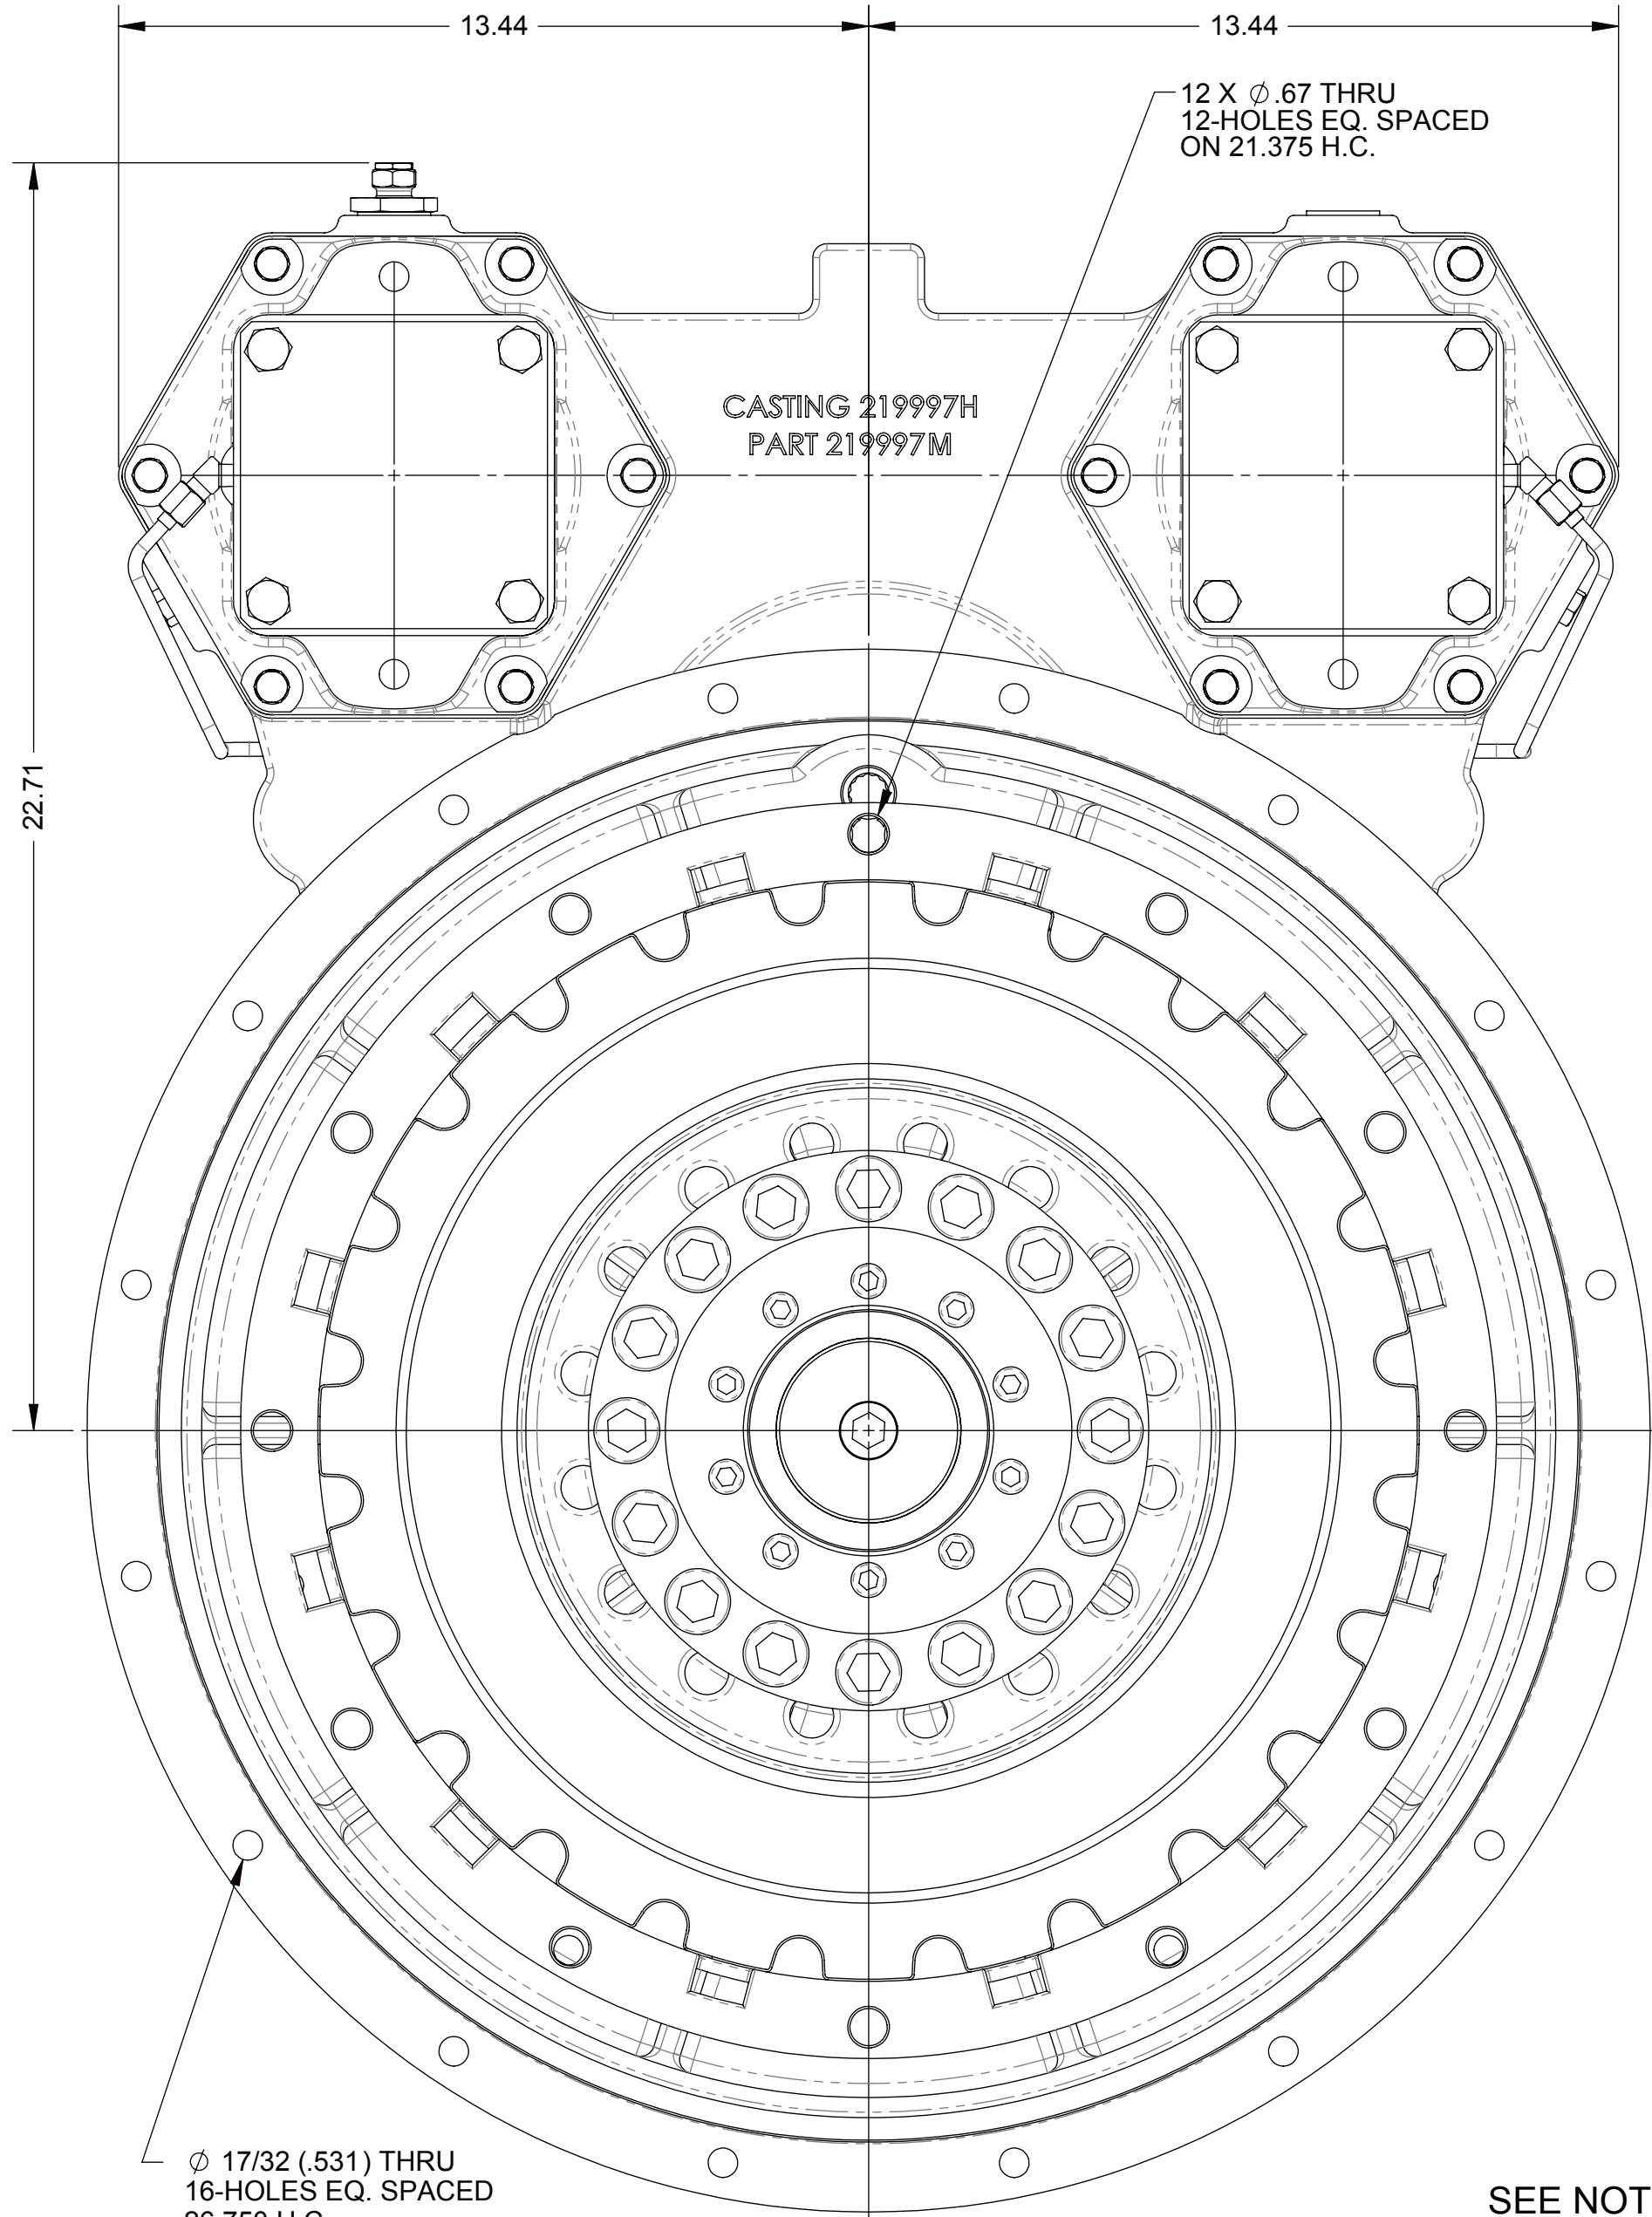

NOTES :

1. COUPLING TO BE INSTALLED WITH LOCKING COLLAR FACE FLUSH WITH SHAFT FACE PER S570BS
2. TORQUE SCREWS PER S574
3. CUSTOMER INTERFACE I.D. :

- 1 INPUT GROUP FACE
- 2 OUTPUT GROUP FACE
- 3 FRONT (INPUT) PUMP MTG. FLANGE FACES
- 4 REAR (OUTPUT) PUMP MTG. FLANGE FACES
- 5 LEFT MOUNTING BRACKET FACE
- 6 RIGHT MOUNTING BRACKET FACE

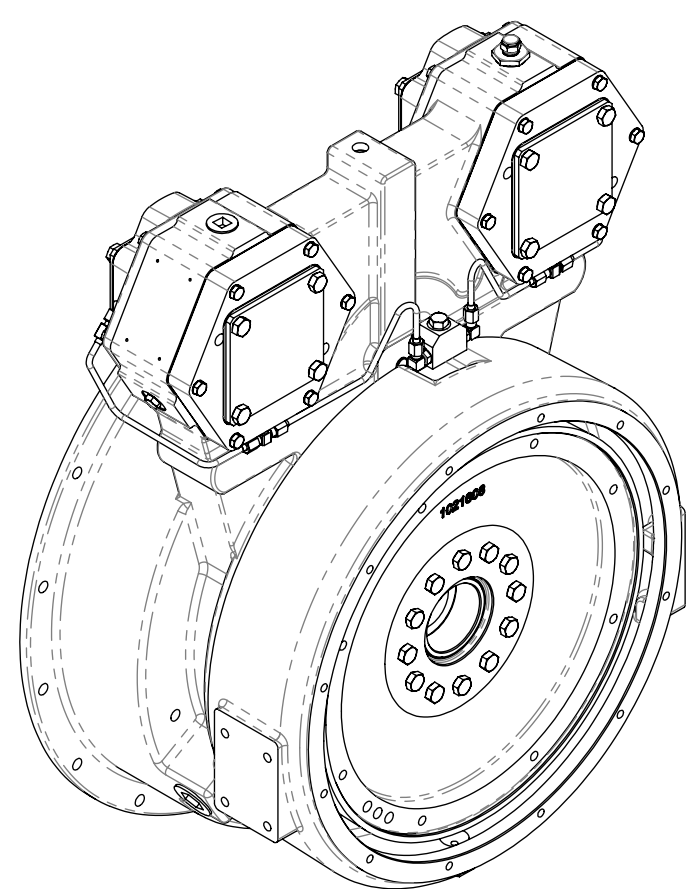

FIRST USE ASSEMBLY: 1026390A		WEIGHT: 815.44 lb		DATE: 08/25/2011	
FIRST USE MODEL: AM100		WR: 10-47		SCALE: 1:3	
SIMILAR TO:		THIRD ANGLE PROJECTION		DRAWN BY: JR	
INCH		UNLESS OTHERWISE SPECIFIED MACHINED DIMENSIONS X.XX $\pm$ 0.010 X.XXX $\pm$ 0.005 ALL ANGULAR TOLERANCES $\pm$ 1° GEOMETRIC TOLERANCING PER ASME Y14.5M 1994		CHECKED BY: ZP	
NOTICE: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DISSEMINATED TO THE INTEREST OF TWIN DISC, INCORPORATED		MATERIAL:		APPROVED BY: GEM	
THIS NOTICE IS NOT INTENDED TO WAIVE OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.		HEAT TREAT:		DWG SIZE: D	
		DESCRIPTION: INSTALLATION PUMP DRIVE, AM100		SHEET: 1 OF 1	
				REV: -	

-	NDWF-07628	07/23/2018
REV	CHANGE NO.	DATE
TWIN DISC		
RACINE, WI 53403 - USA		
1026868A		
1		