

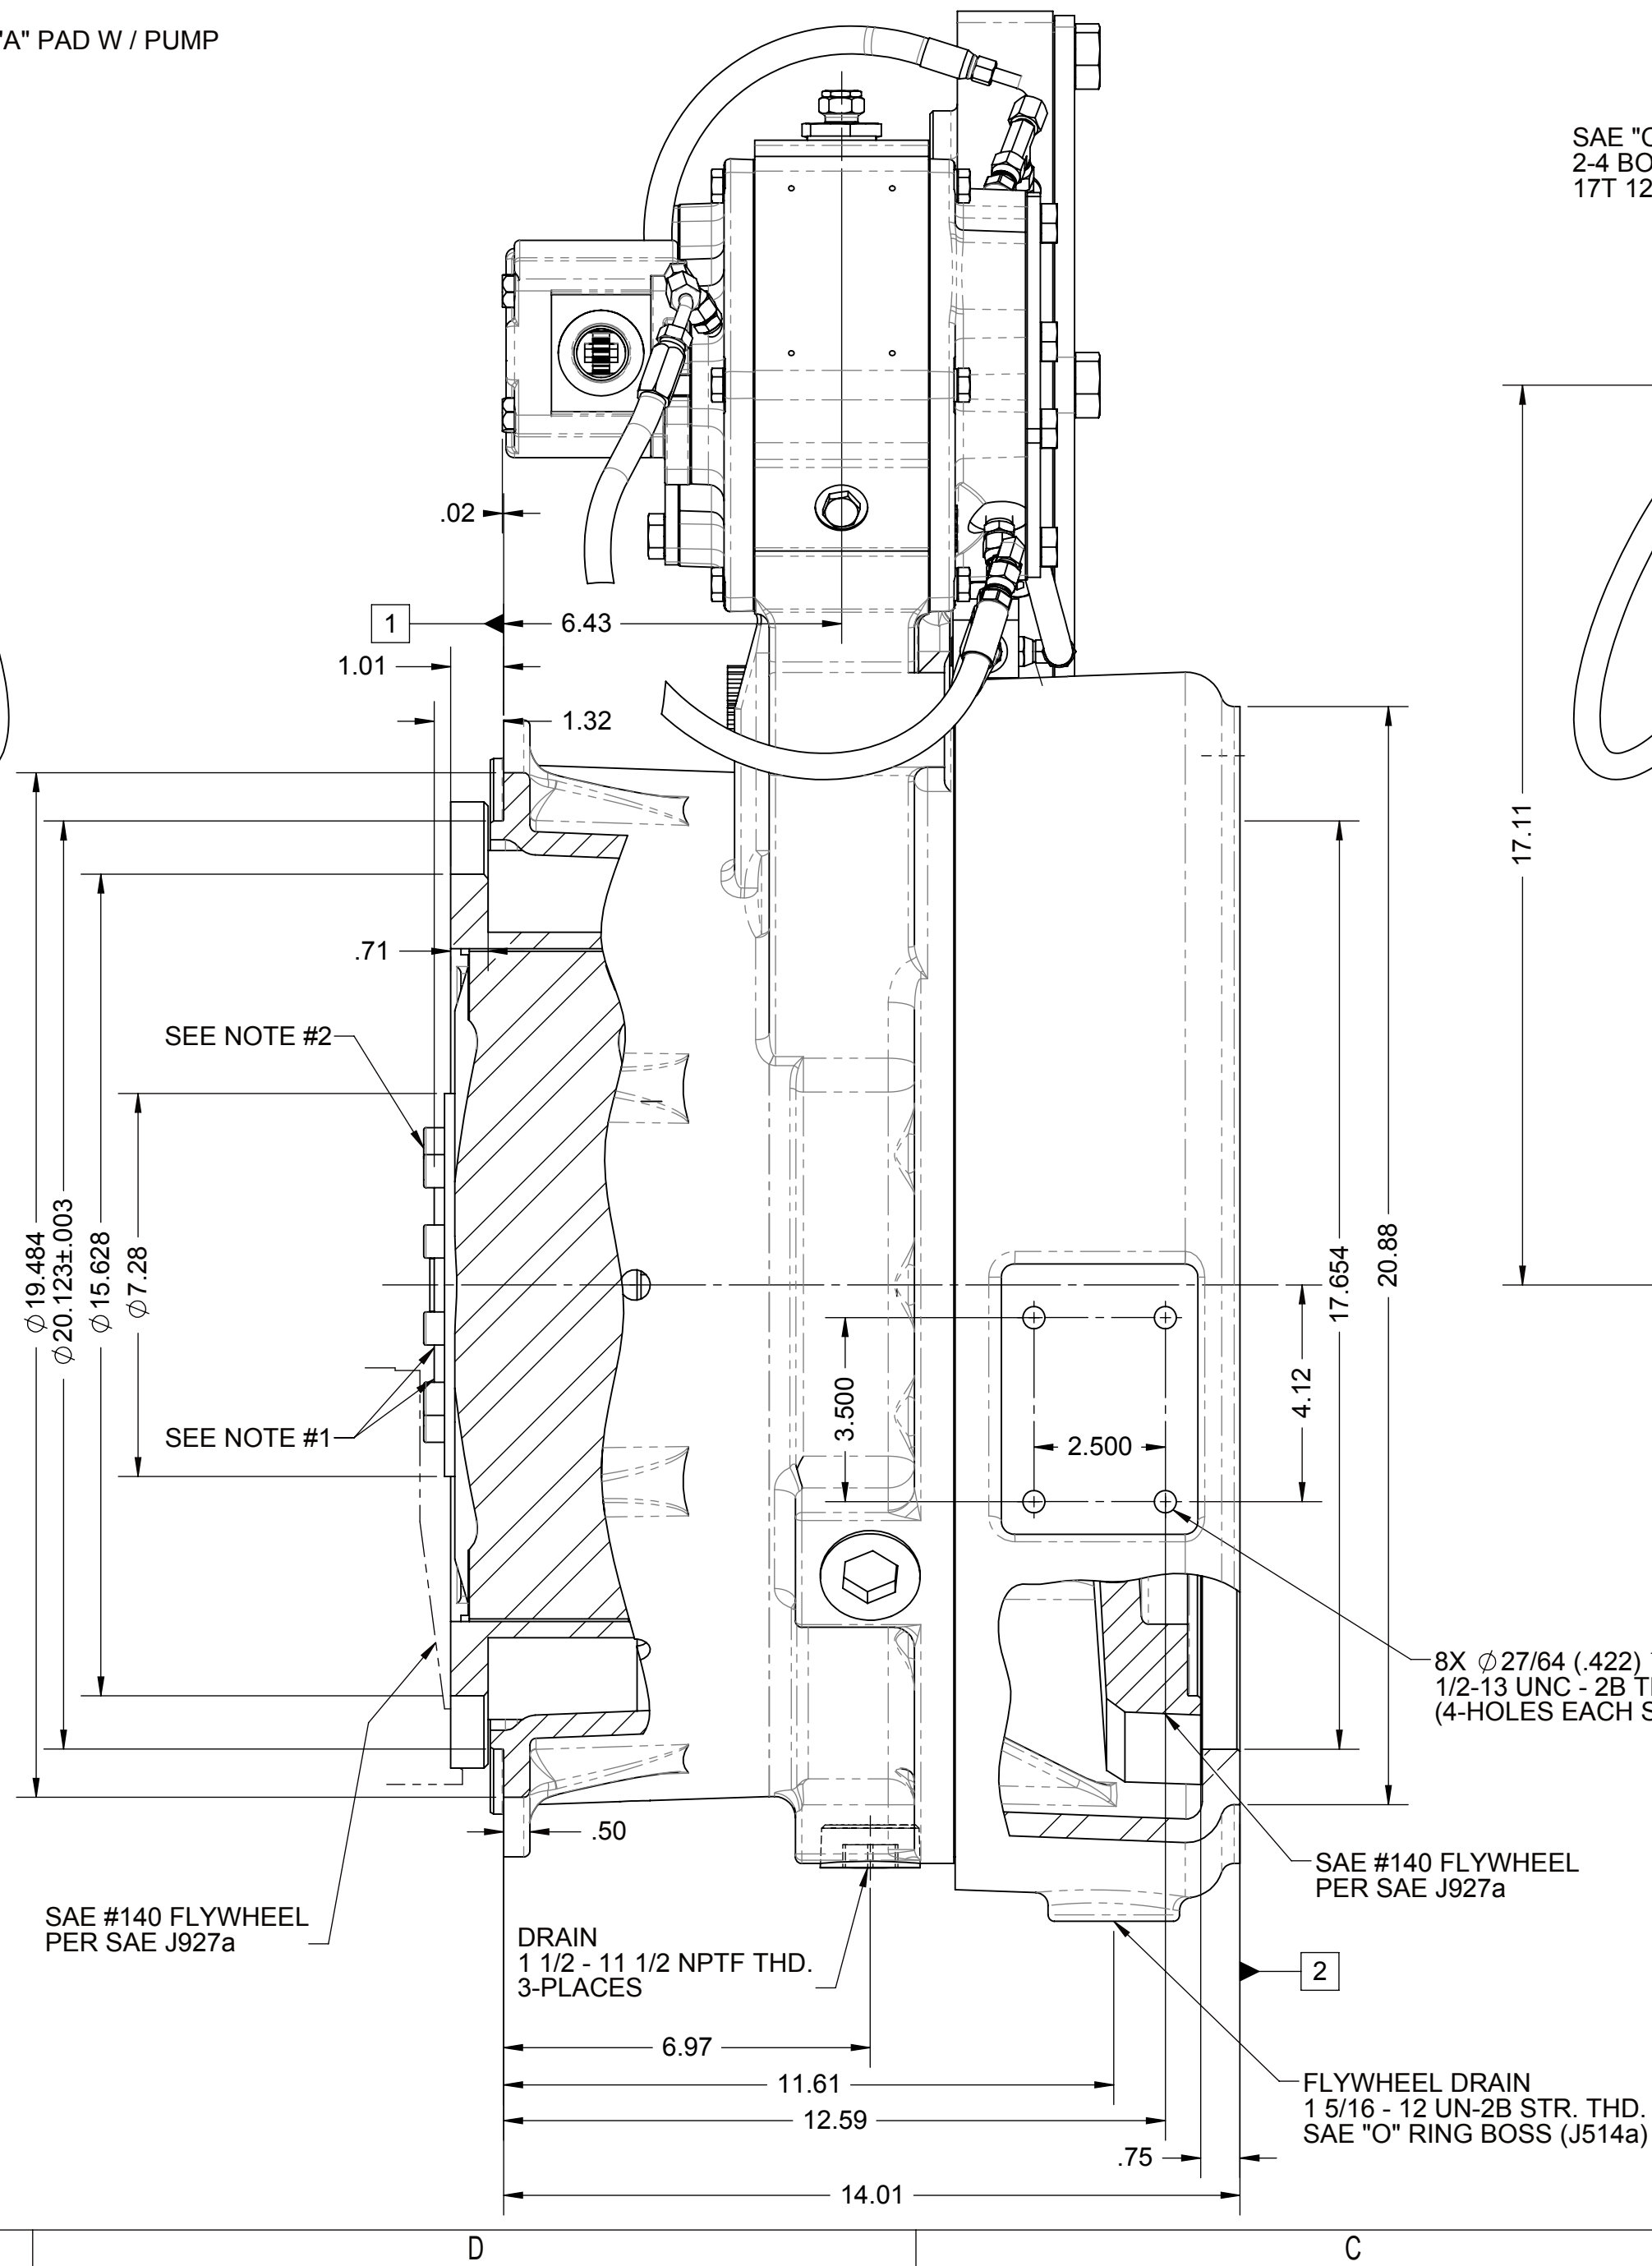
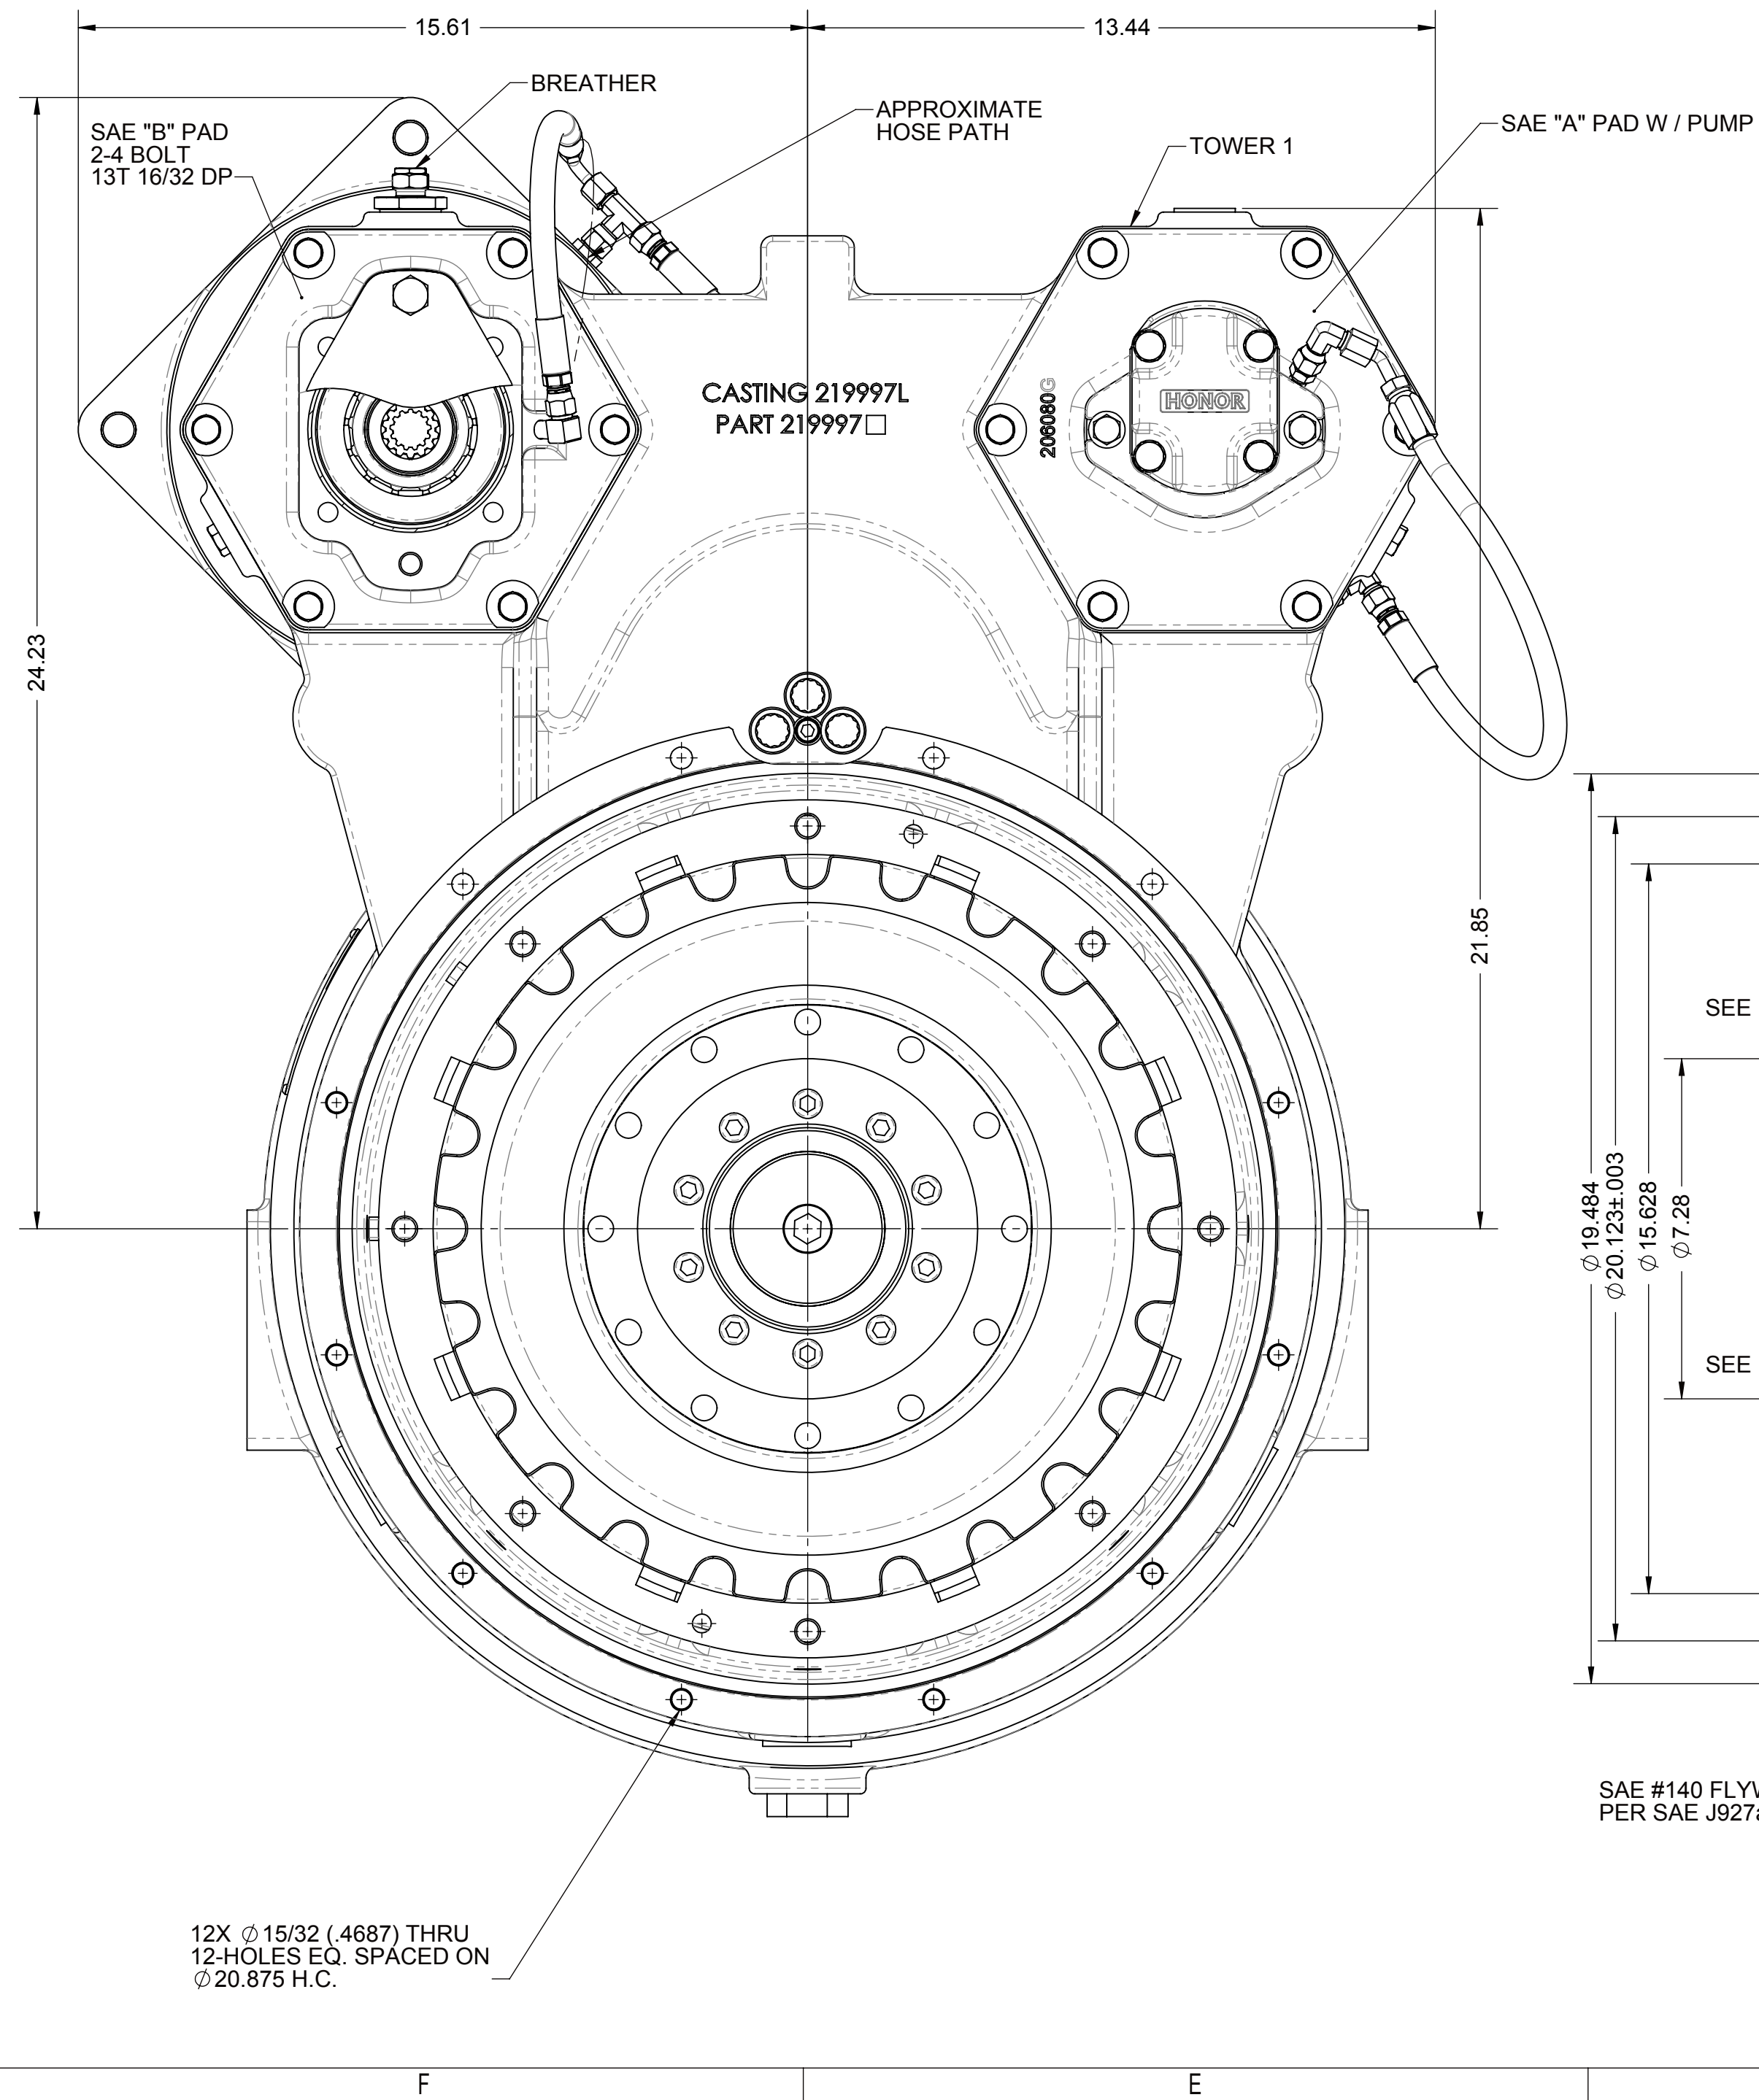
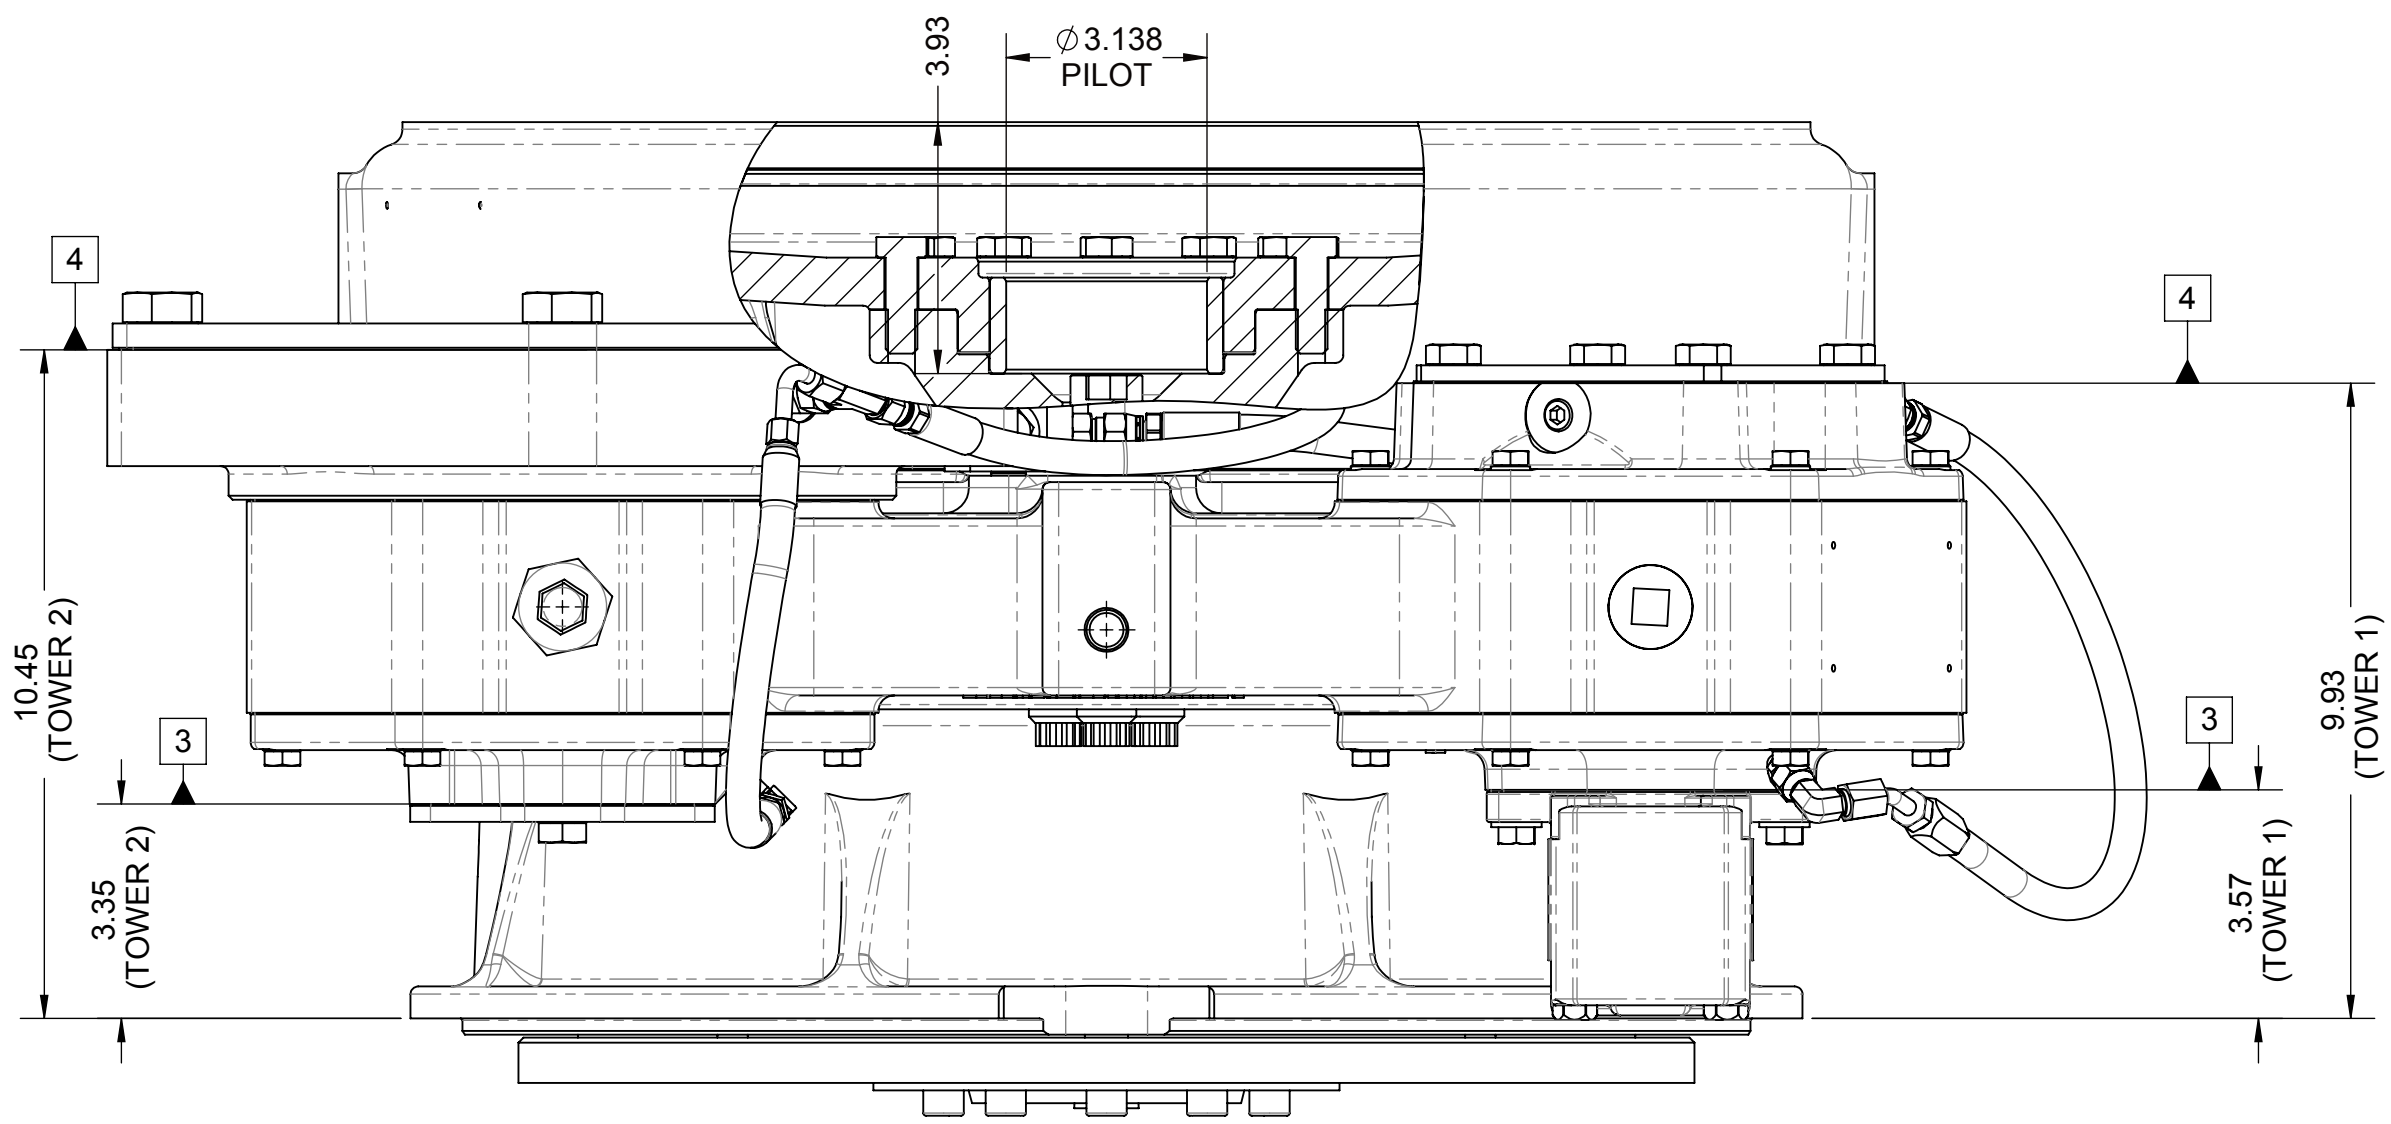


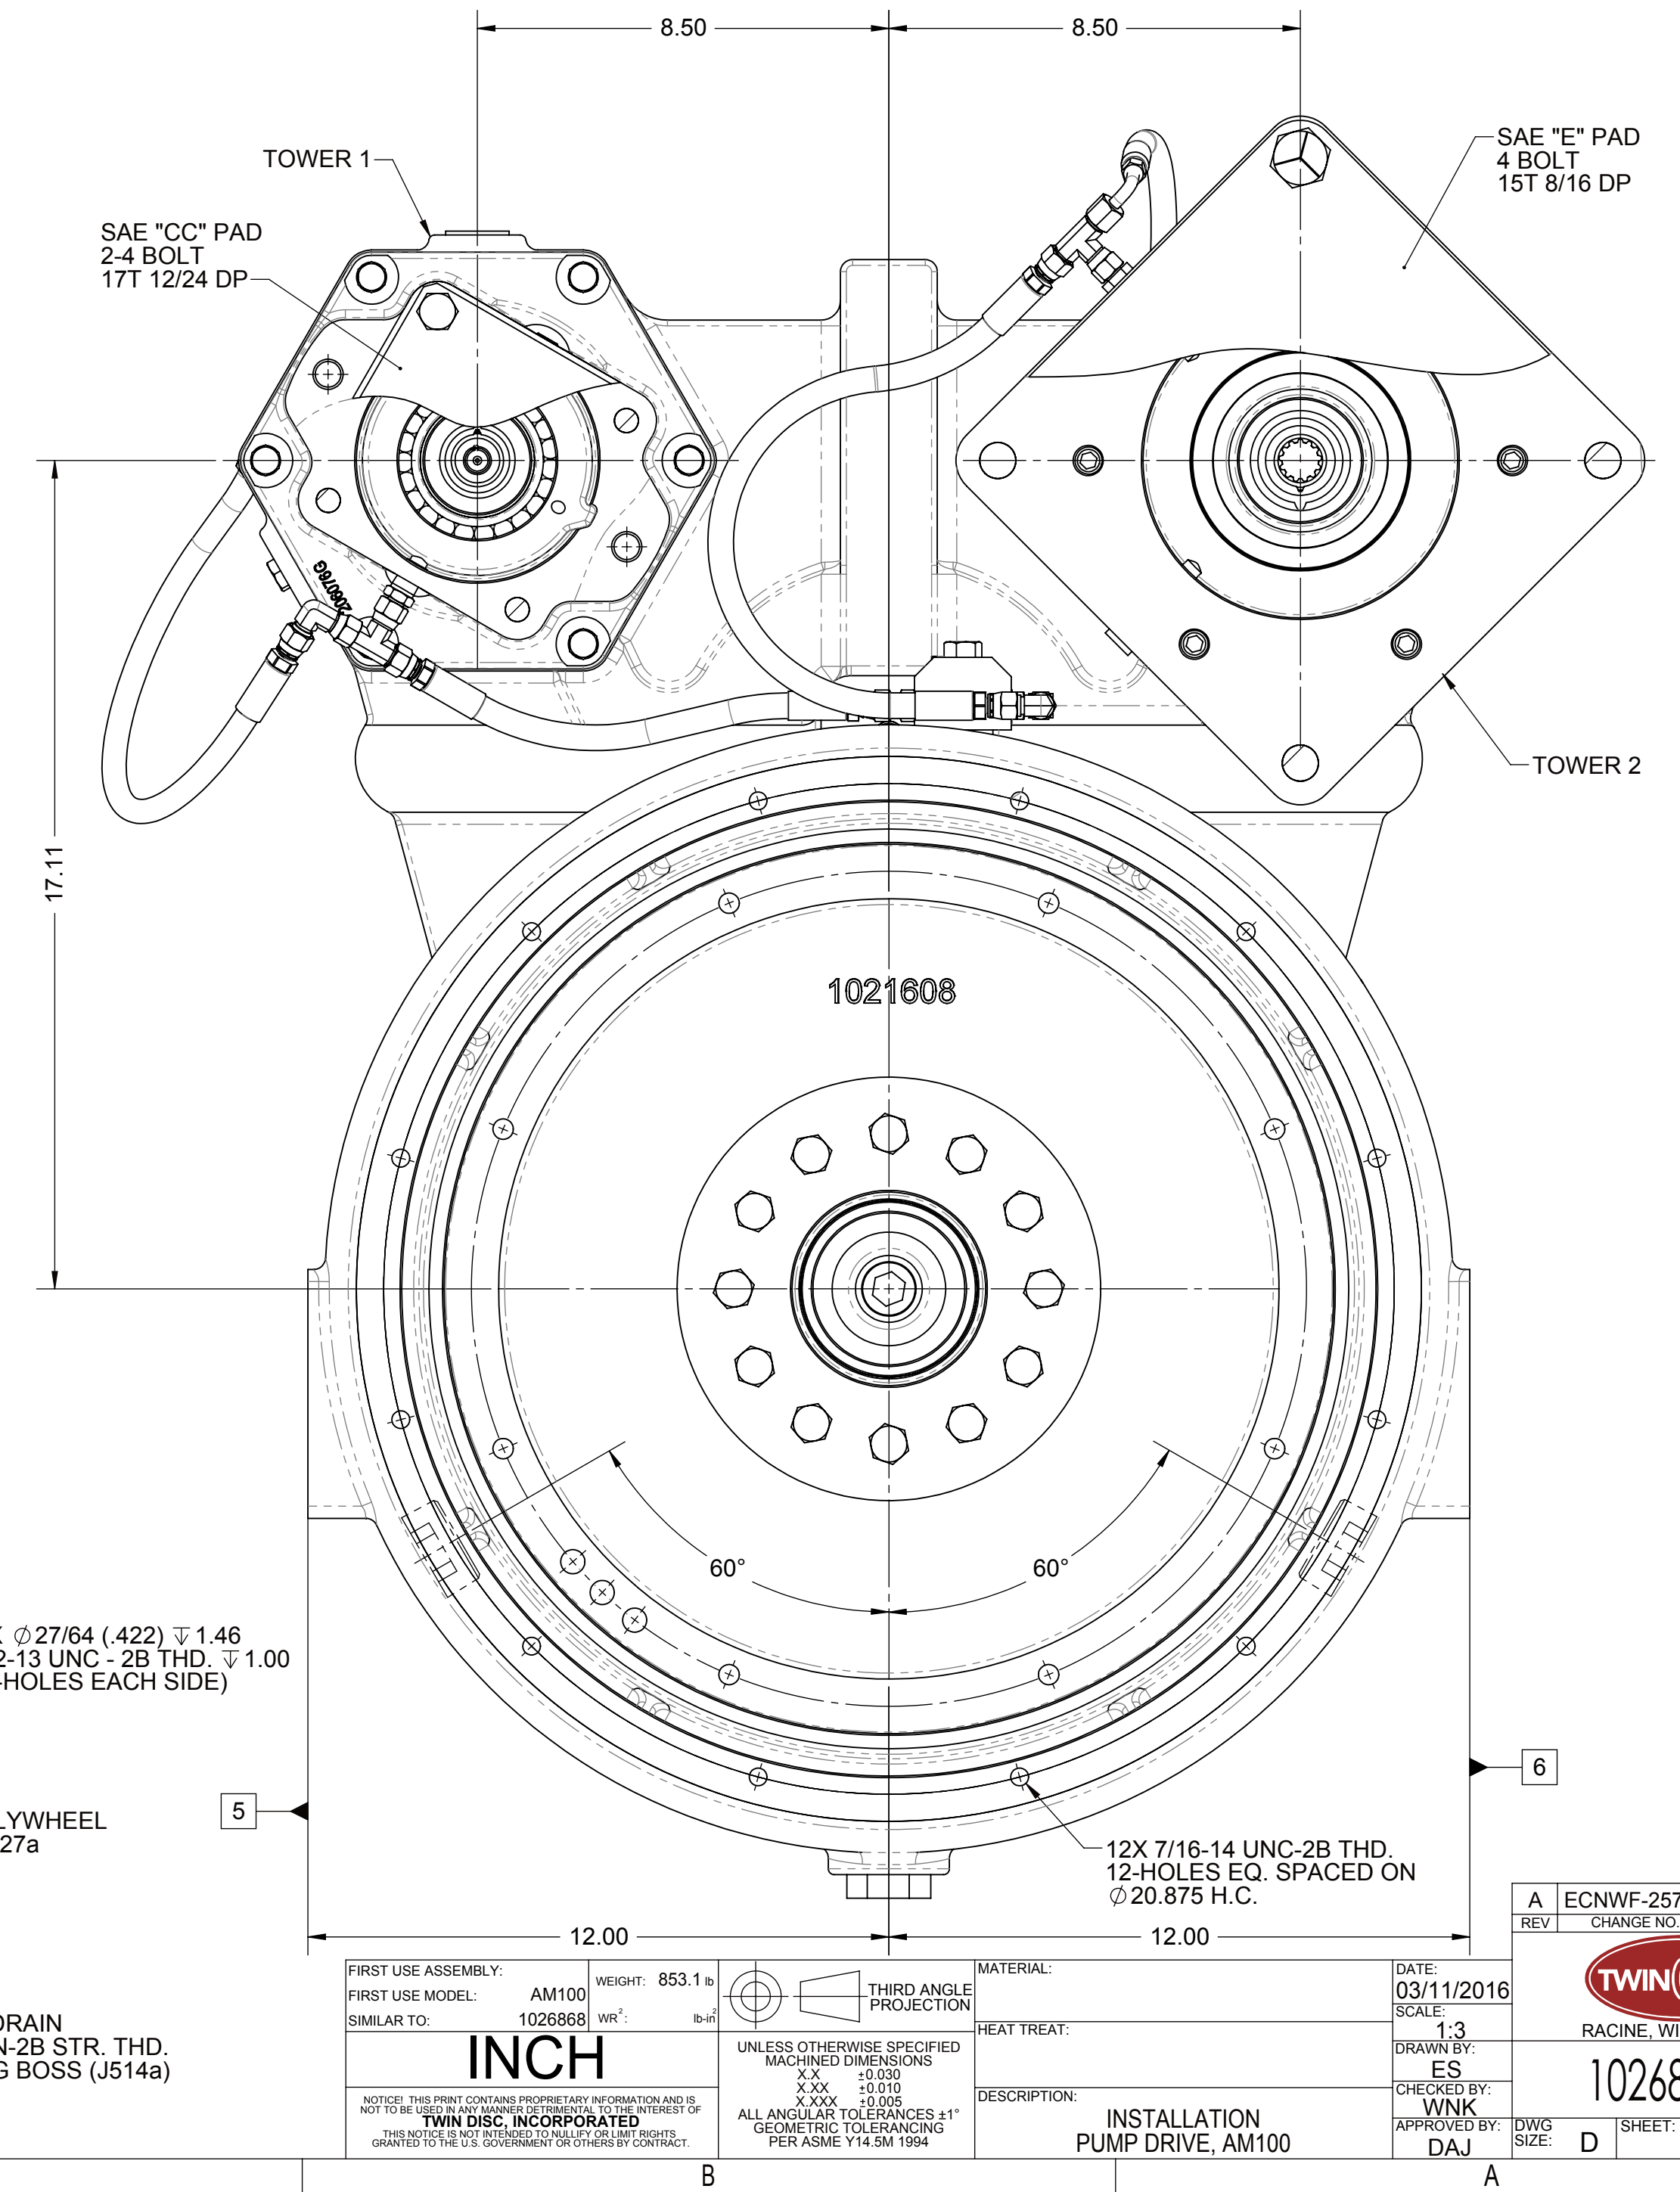

NOTES :

1. COUPLING TO BE INSTALLED WITH LOCKING COLLAR FACE FLUSH WITH SHAFT FACE PER S570BS
2. TORQUE SCREWS PER S574
3. CUSTOMER INTERFACE I.D. :

- 1 INPUT GROUP FACE
- 2 OUTPUT GROUP FACE
- 3 FRONT (INPUT) PUMP MTG. FLANGE FACES
- 4 REAR (OUTPUT) PUMP MTG. FLANGE FACES
- 5 LEFT MOUNTING BRACKET FACE
- 6 RIGHT MOUNTING BRACKET FACE

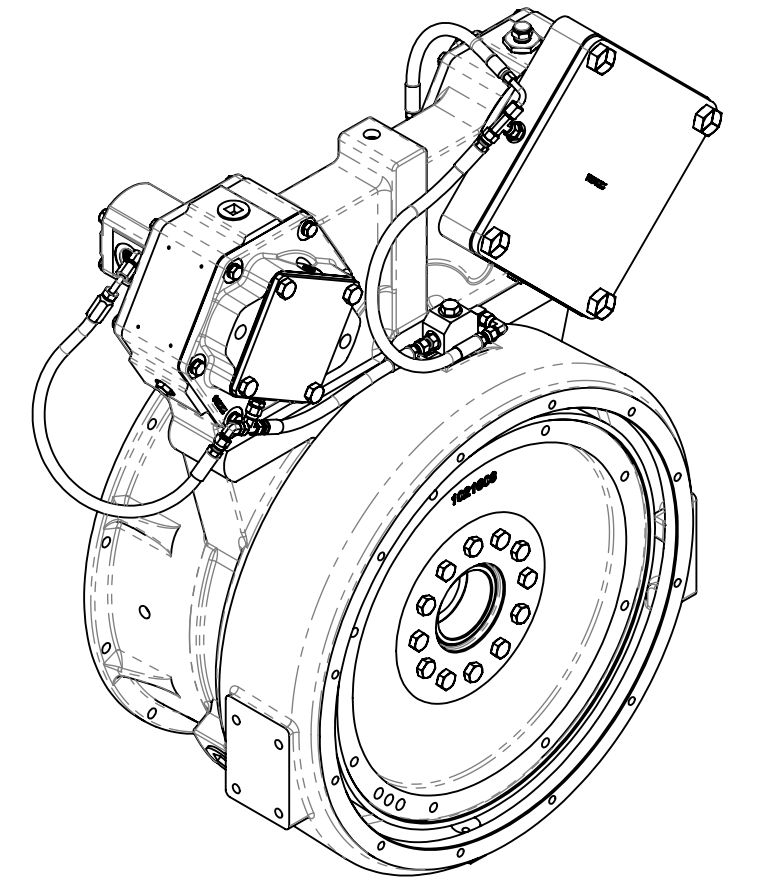

FIRST USE ASSEMBLY: FIRST USE MODEL: AM100 SIMILAR TO: 1026868		WEIGHT: 853.1 lb WR: 10-47	 THIRD ANGLE PROJECTION	MATERIAL: HEAT TREAT: DESCRIPTION: INSTALLATION PUMP DRIVE, AM100		DATE: 03/11/2016 SCALE: 1:3 DRAWN BY: ES CHECKED BY: VINK APPROVED BY: DAJ	 RACINE, WI 53403 - USA 1026868C DWG SIZE: D SHEET: 1 OF 1 REV: A
UNLESS OTHERWISE SPECIFIED MACHINED DIMENSIONS X.XX ±0.010 X.XXX ±0.005 ALL ANGULAR TOLERANCES ±1° GEOMETRIC TOLERANCING PER ASME Y14.5M 1994		NOTICE: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER OR FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF TWIN DISC, INCORPORATED. THE MOTOR IS NOT INTENDED TO BE USED IN ANY MANNER OR FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF TWIN DISC, INCORPORATED.		A ECNWF-25781 07/24/2018 REV CHANGE NO. DATE			