

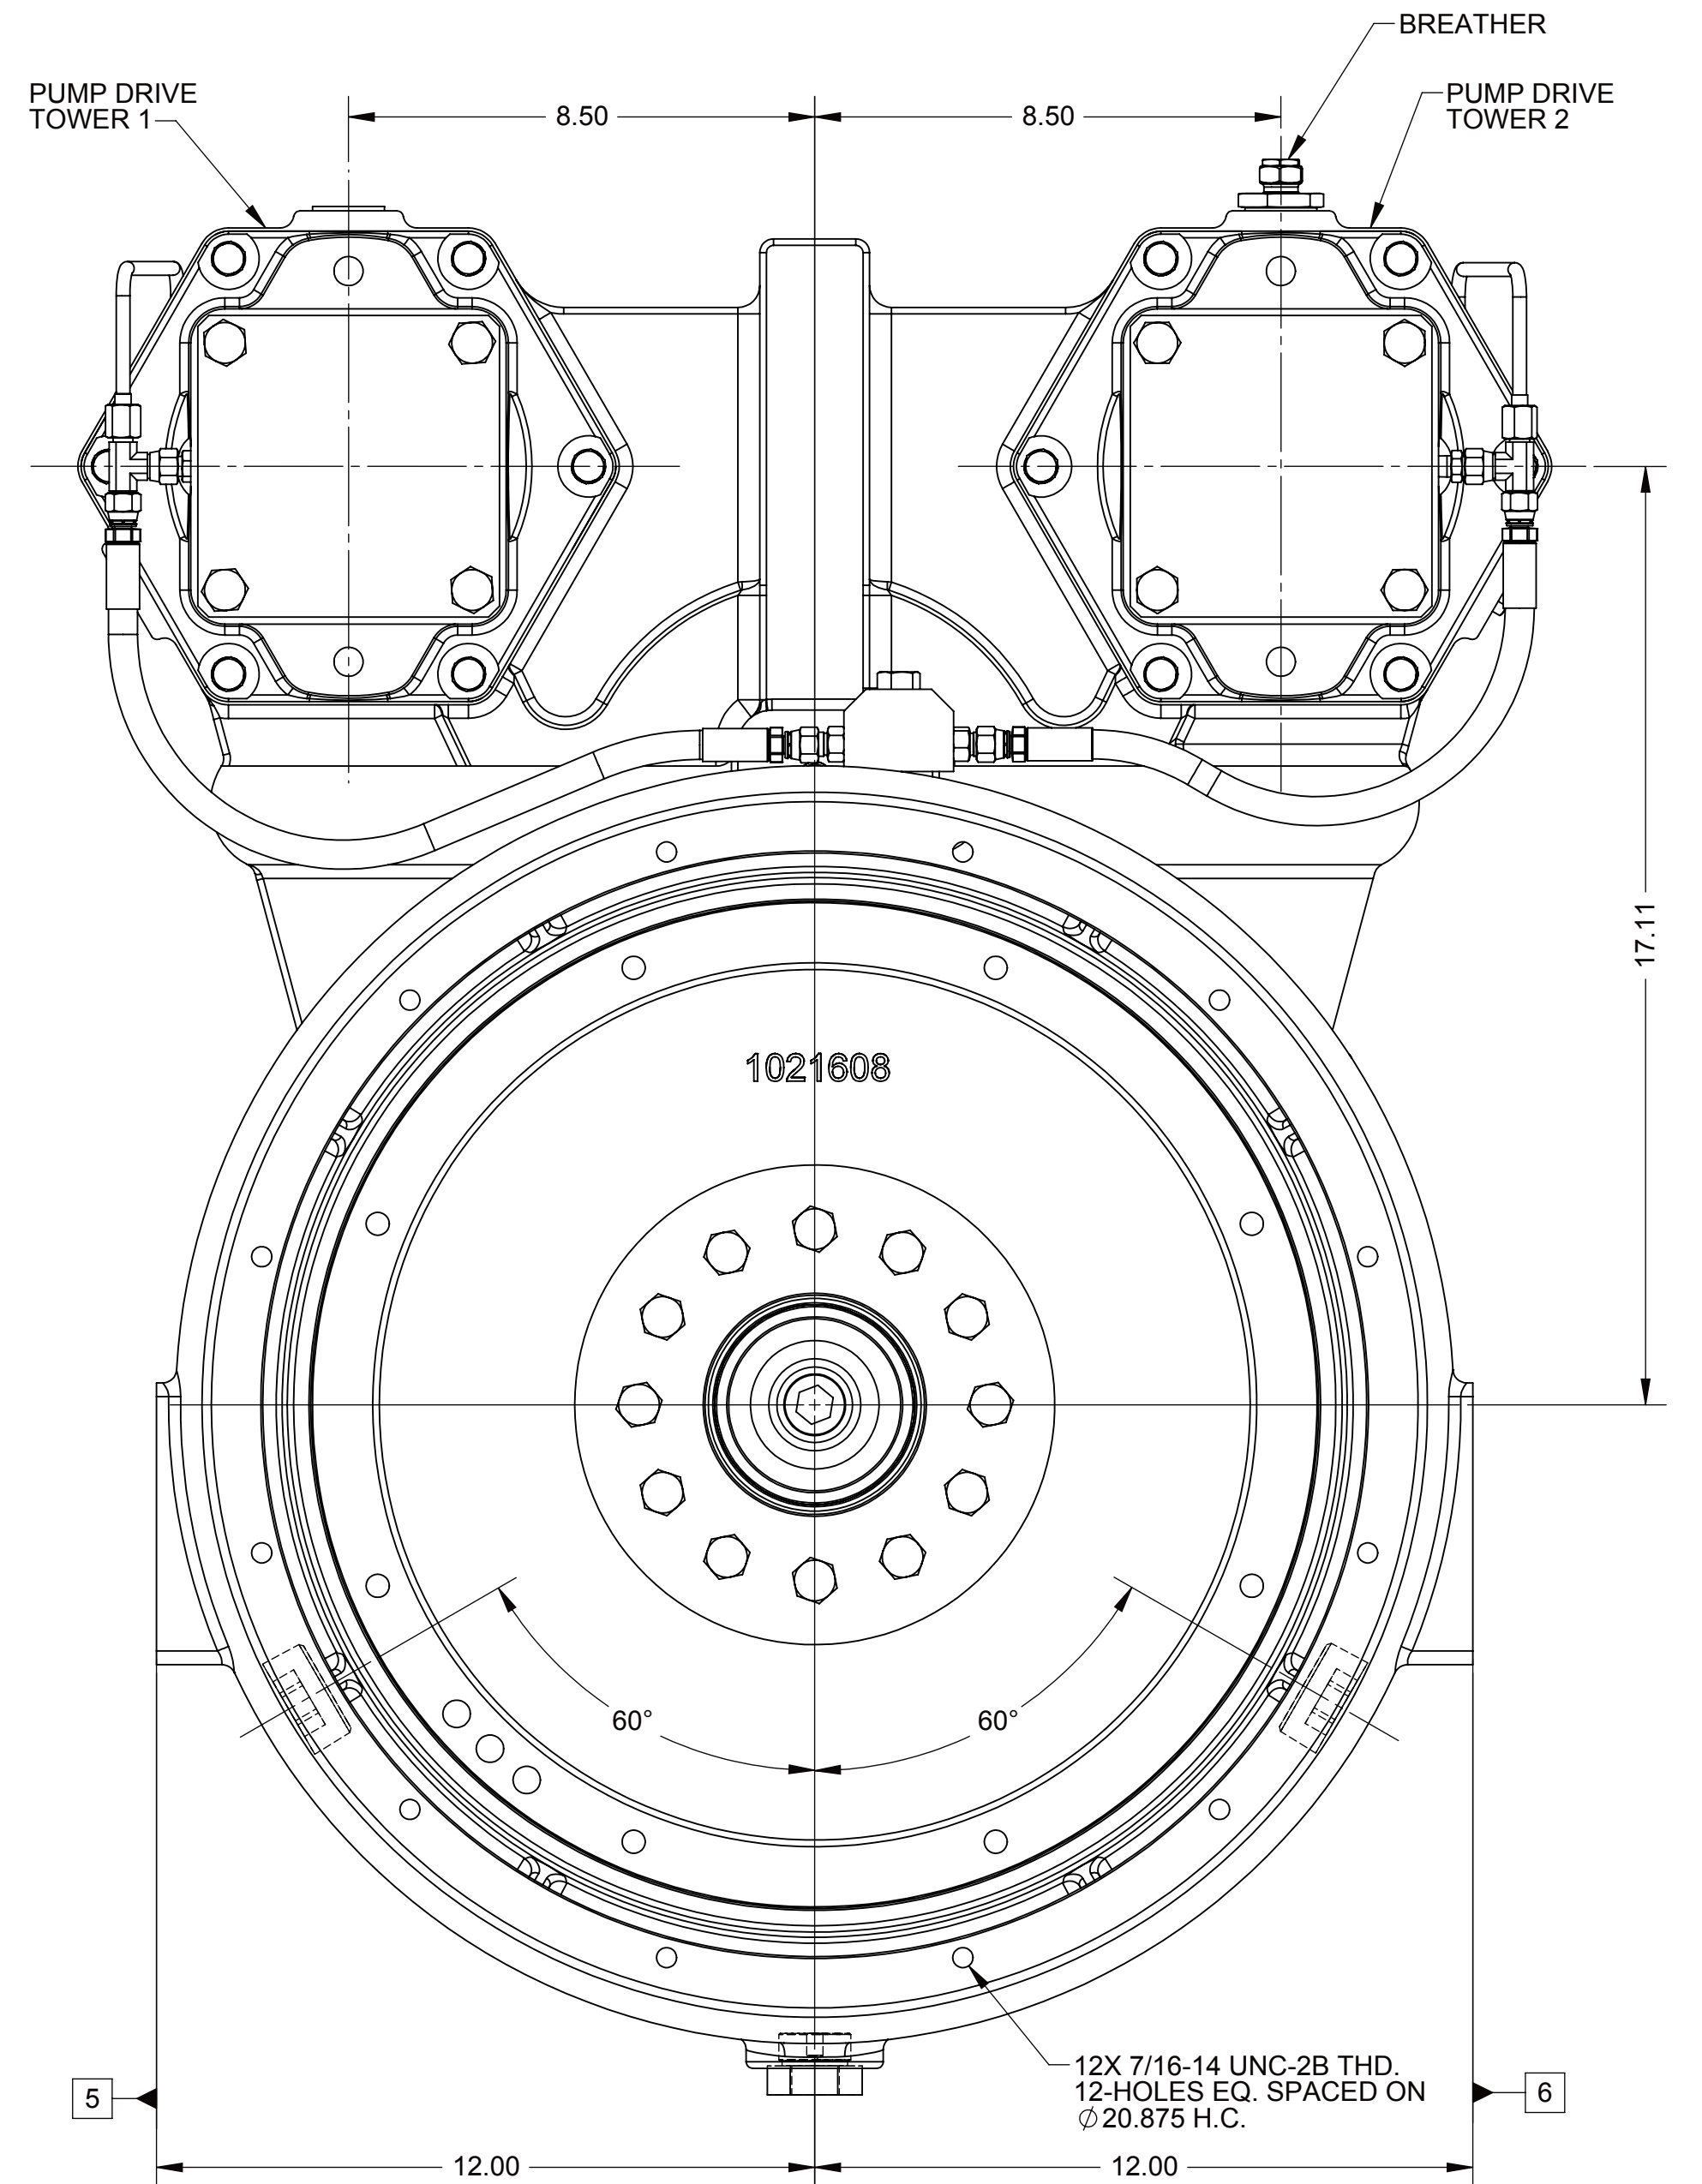
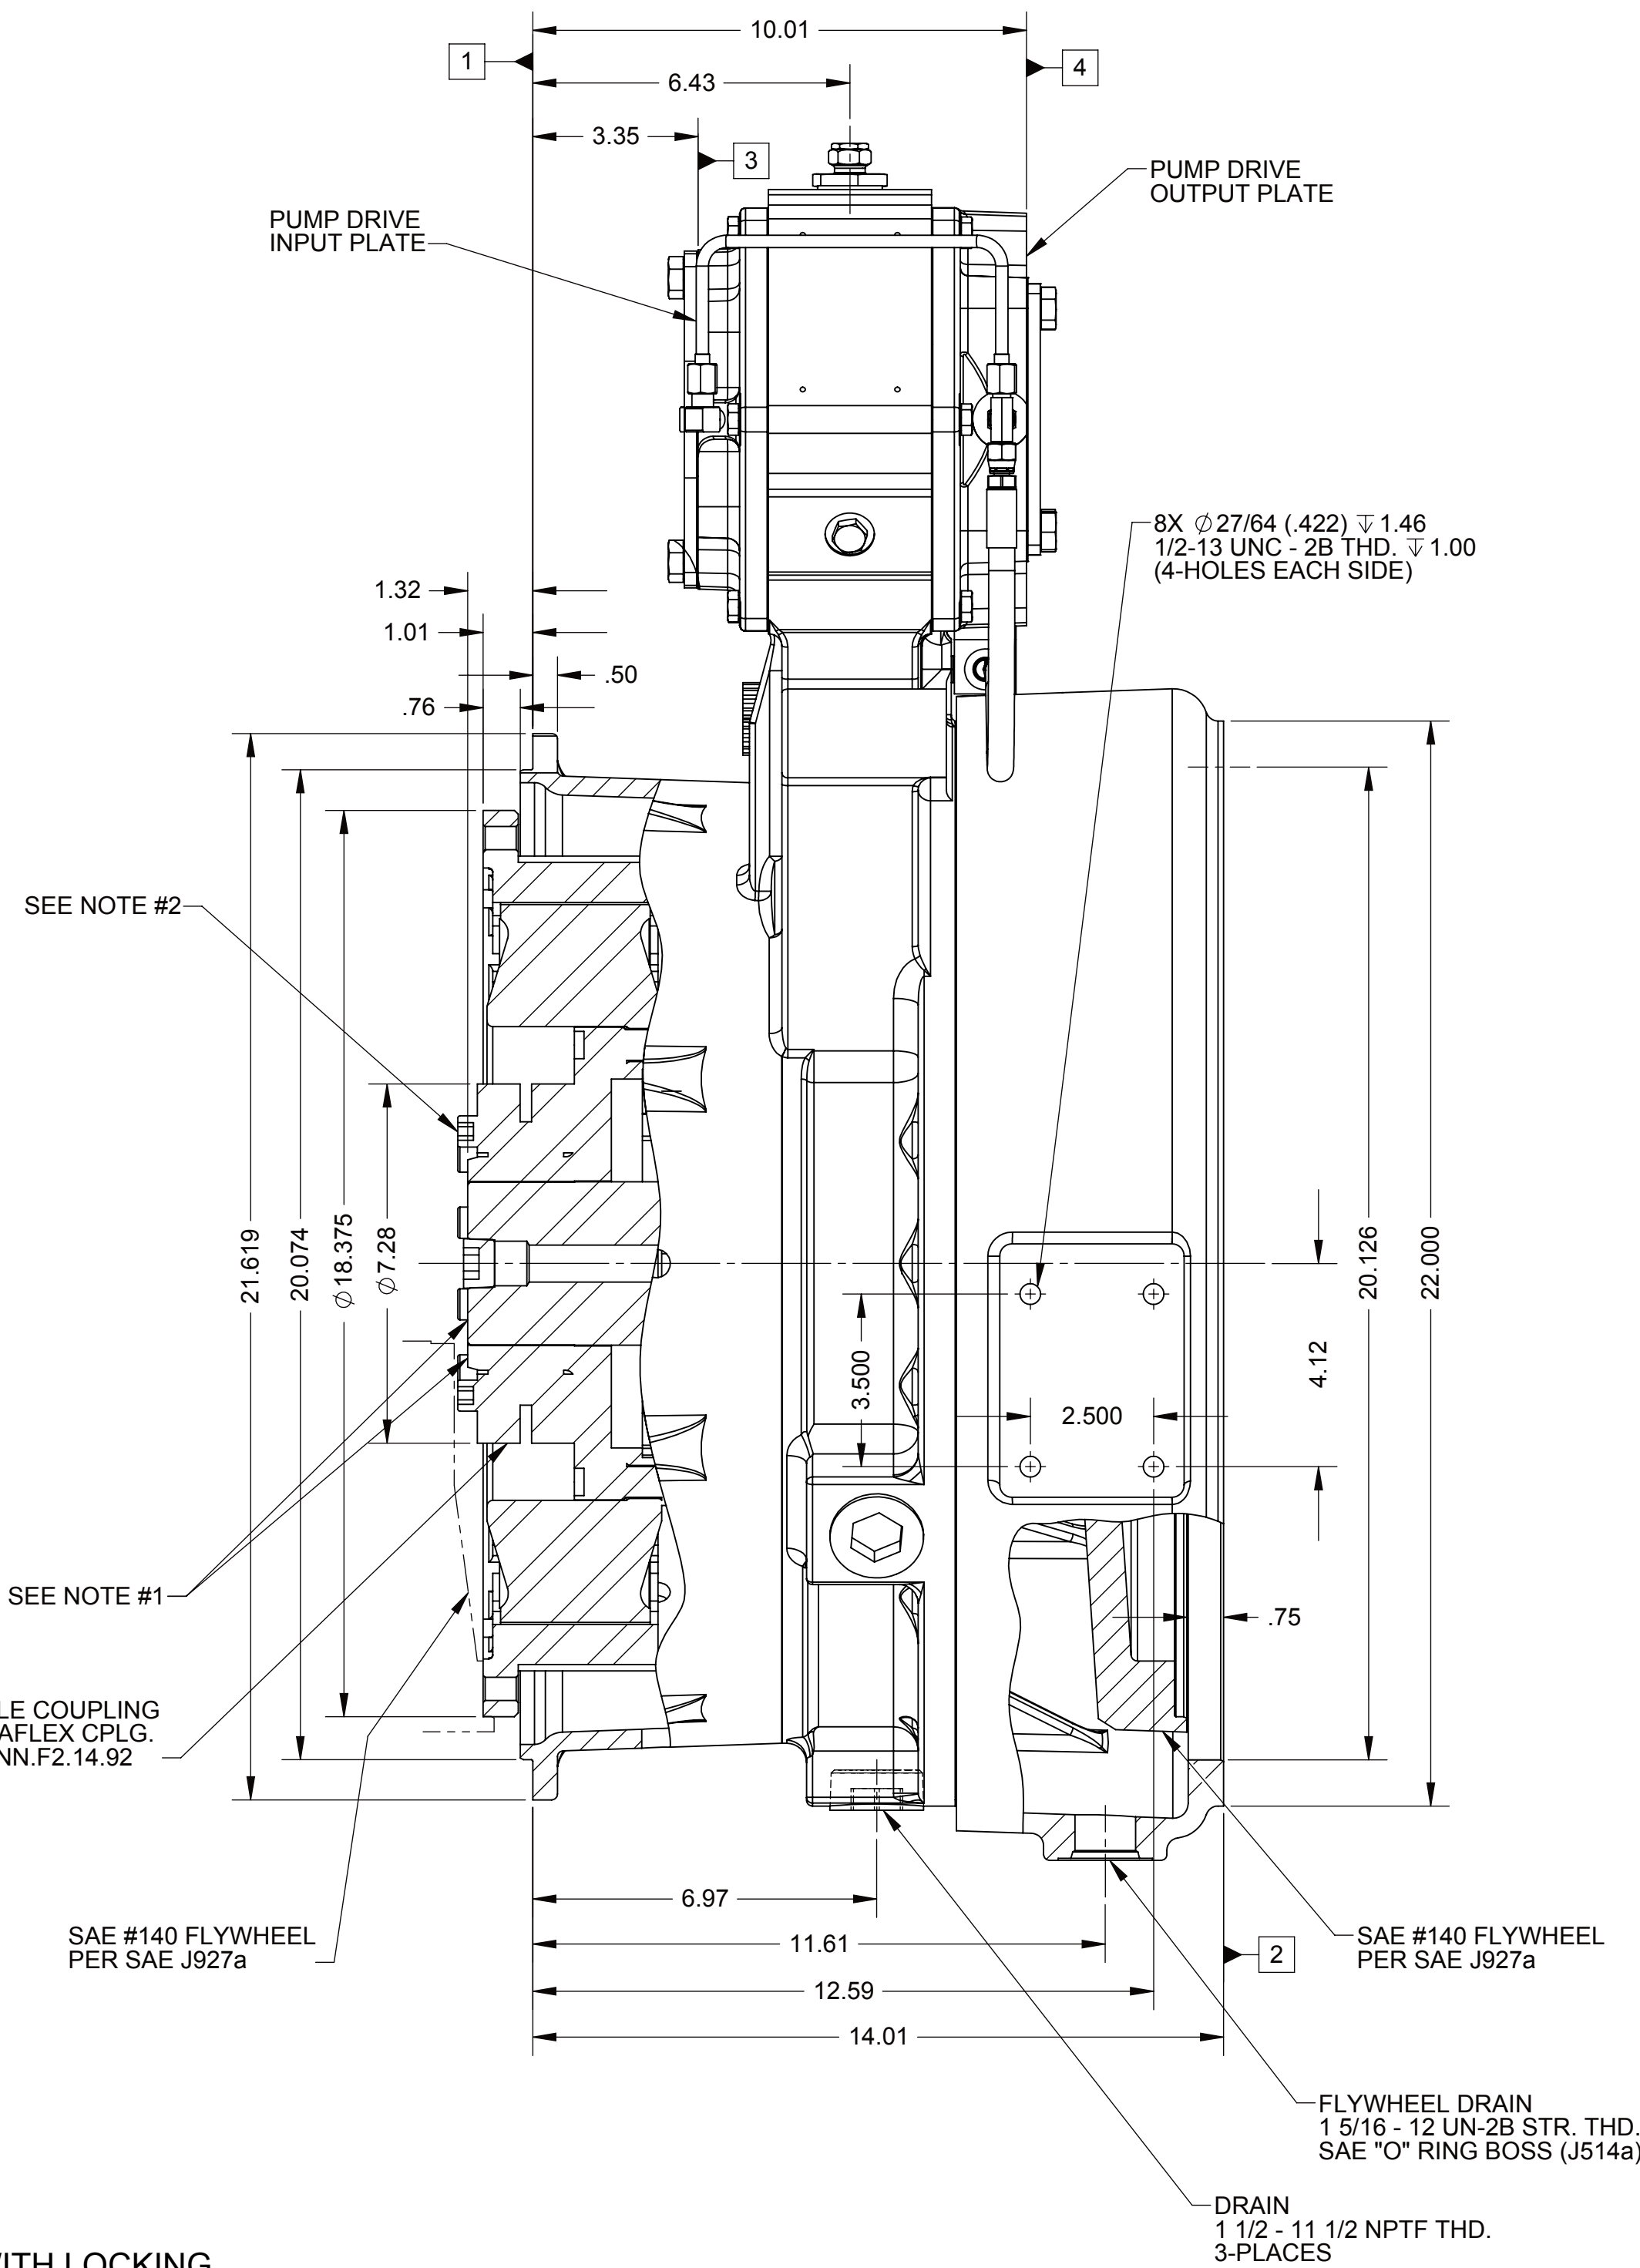


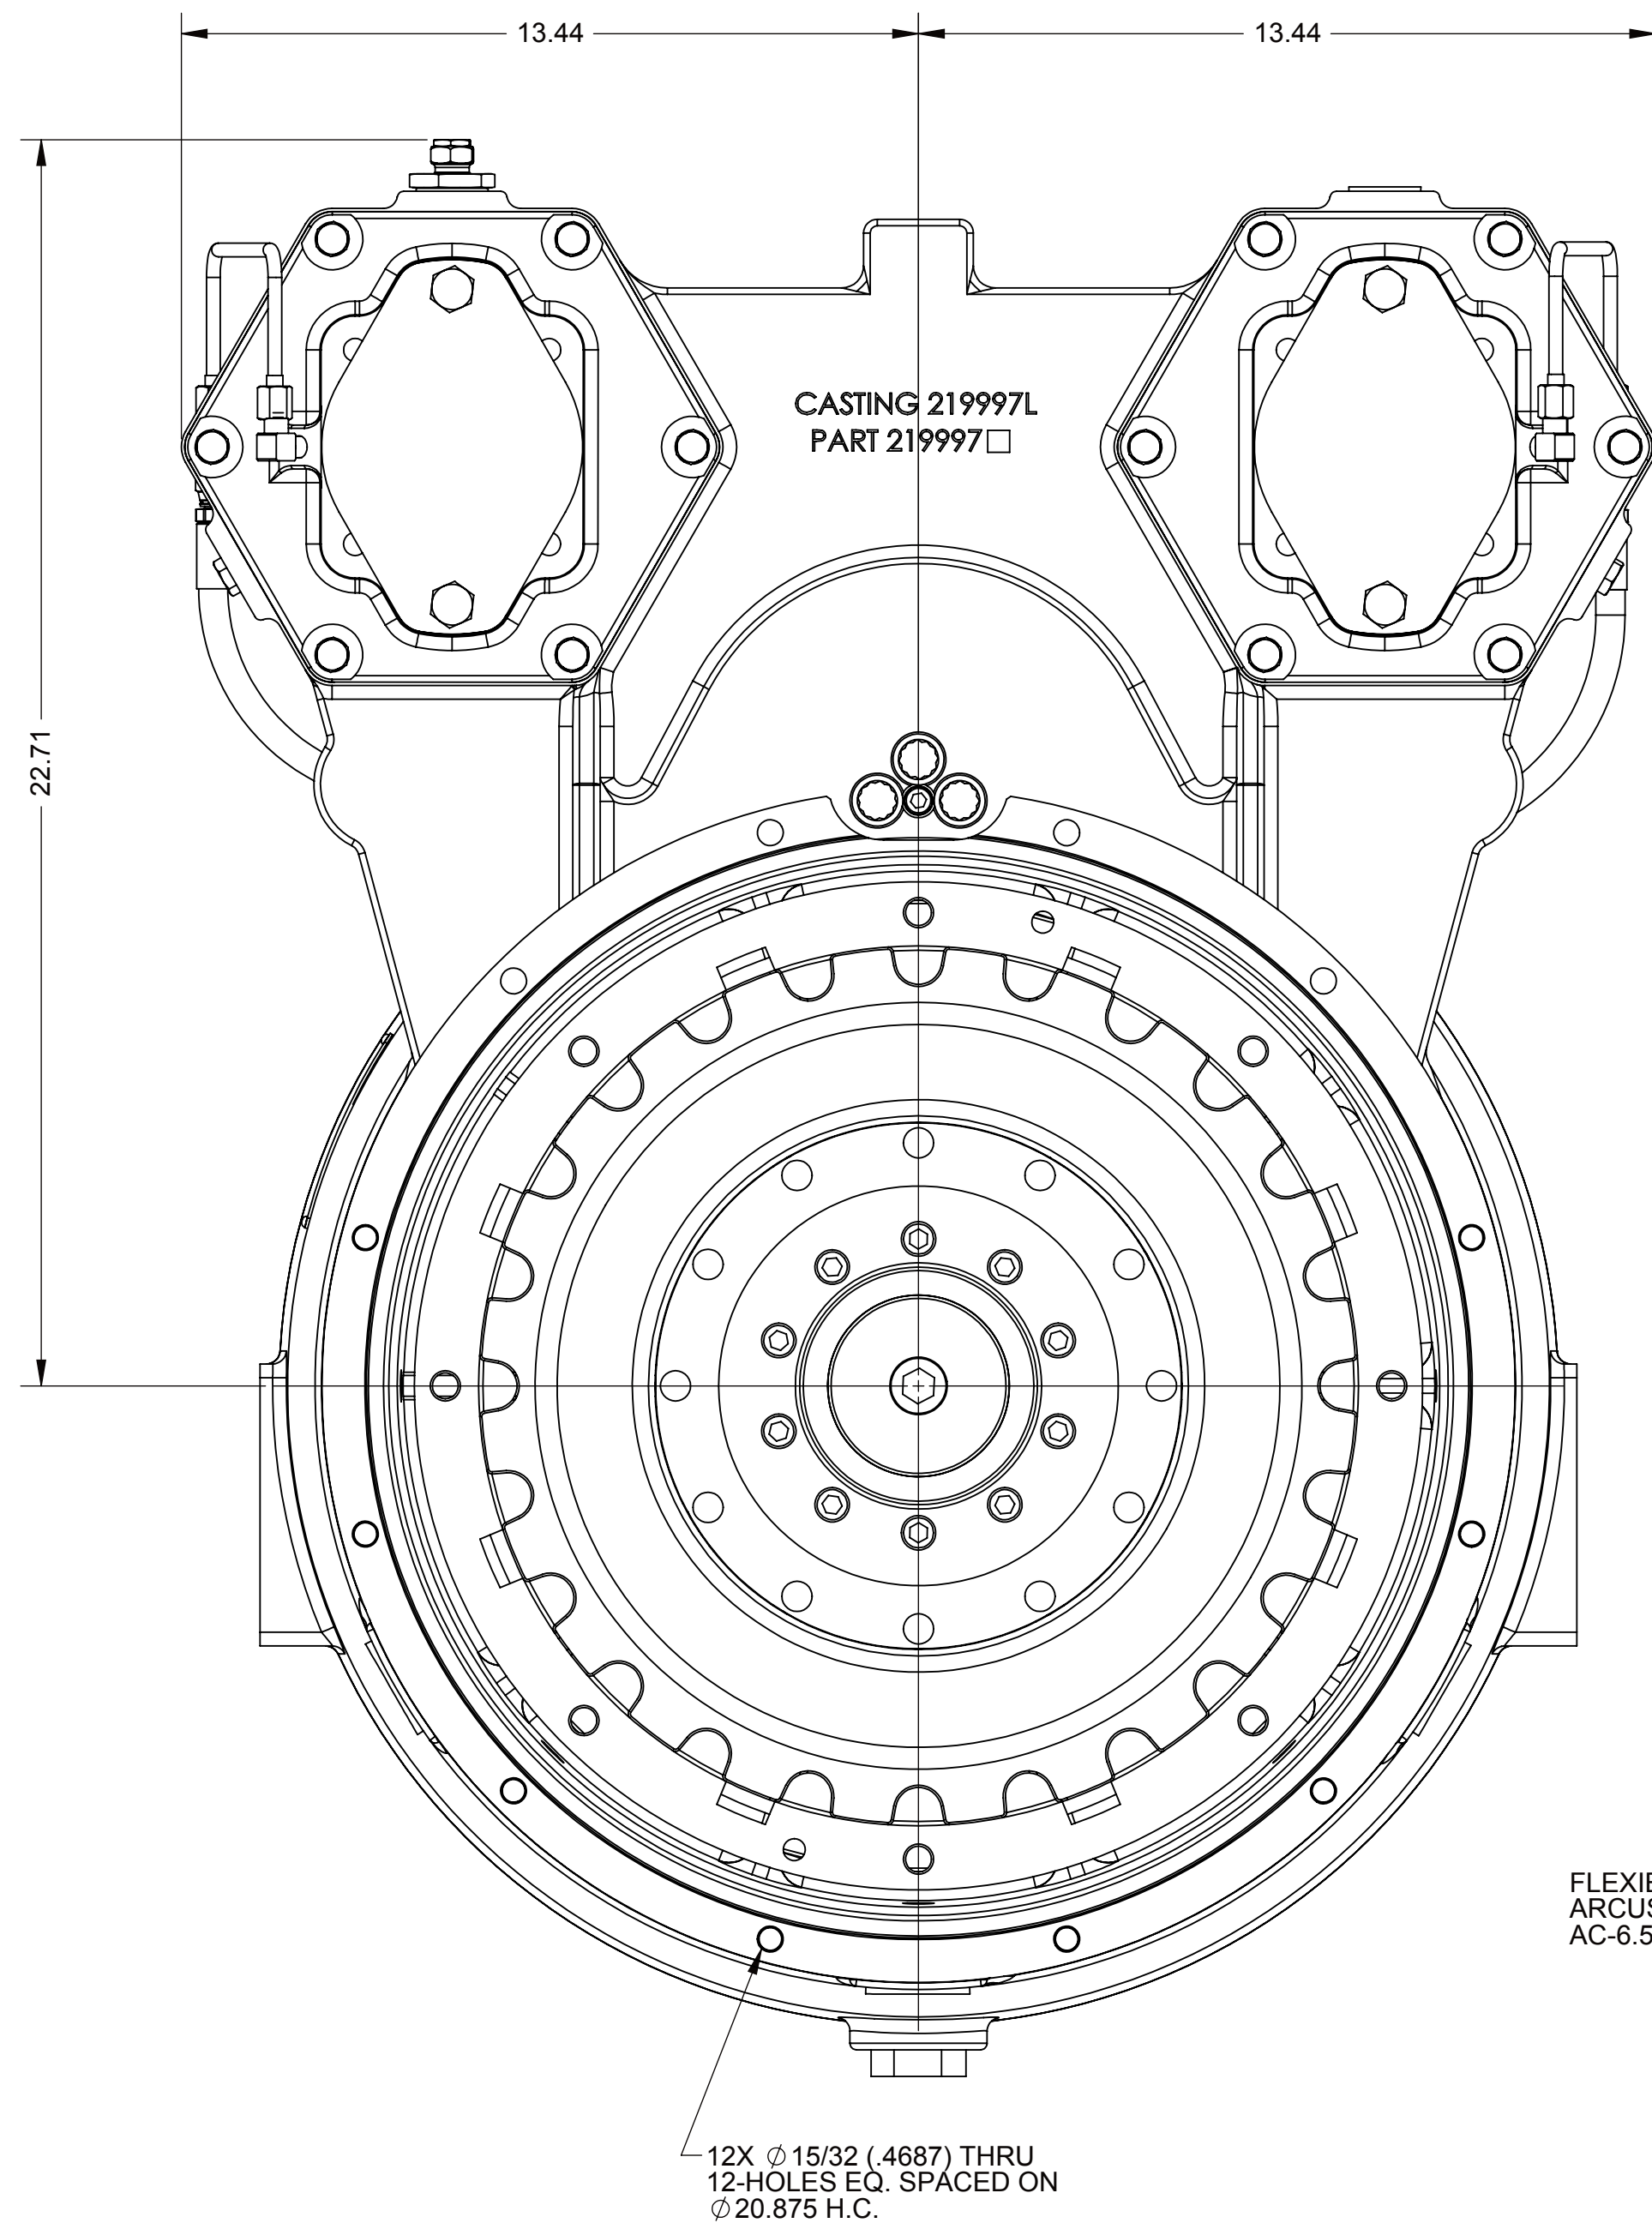

NOTES :

1. COUPLING TO BE INSTALLED WITH LOCKING COLLAR FACE FLUSH WITH SHAFT FACE PER S570BS
2. TORQUE SCREWS PER S574
3. CUSTOMER INTERFACE I.D. :

- 1 INPUT GROUP FACE
- 2 OUTPUT GROUP FACE
- 3 FRONT (INPUT) PUMP MTG. FLANGE FACES
- 4 REAR (OUTPUT) PUMP MTG. FLANGE FACES
- 5 LEFT MOUNTING BRACKET FACE
- 6 RIGHT MOUNTING BRACKET FACE

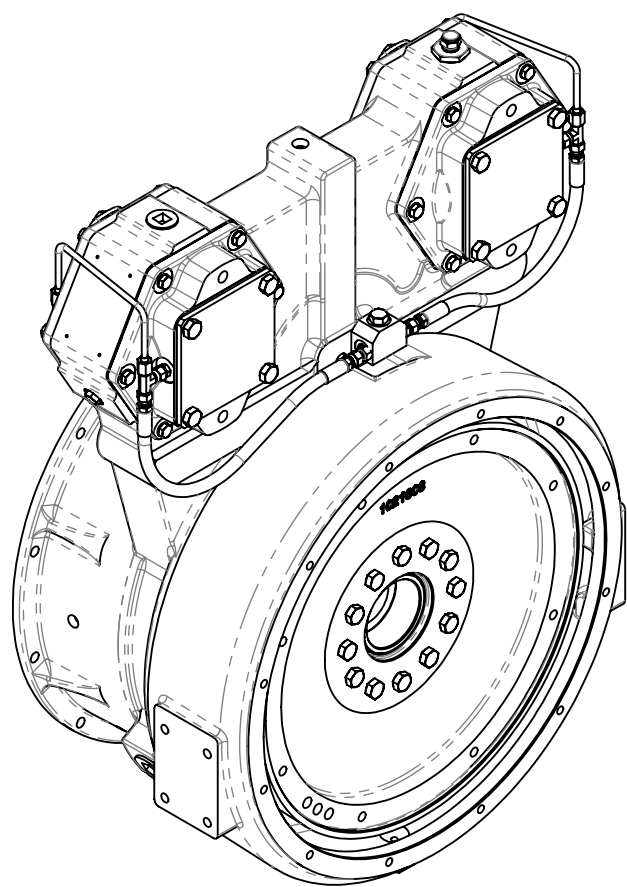

FIRST USE ASSEMBLY: S1030379		WEIGHT: 793 lb		THIRD ANGLE PROJECTION	MATERIAL:	DATE: 10/21/2015					
FIRST USE MODEL: AM100											
SIMILAR TO: 1026868		WR: 10-47	UNLESS OTHERWISE SPECIFIED MACHINED DIMENSIONS X.X ±0.030 X.XX ±0.010 ALL ANGULAR TOLERANCES ±1° GEOMETRIC TOLERANCING PER ASME Y14.5M 1994	HEAT TREAT:	SCALE: 1:3	RACINE, WI 53403 - USA					
INCH											
NOTICE: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER OR FORM TO THE INTEREST OF TWIN DISC, INCORPORATED WITHOUT THE WRITTEN PERMISSION OF TWIN DISC, INCORPORATED. THIS NOTICE IS NOT TO BE USED IN ANY MANNER OR FORM TO THE INTEREST OF TWIN DISC, INCORPORATED.		DESCRIPTION: INSTALLATION PUMP DRIVE, AM100		DRAWN BY: JAL	1026868D	SHEET: 1 OF 1					
							CHECKED BY: WNK				
								APPROVED BY: DAJ			
									DWG SIZE: D		
										REV: -	