
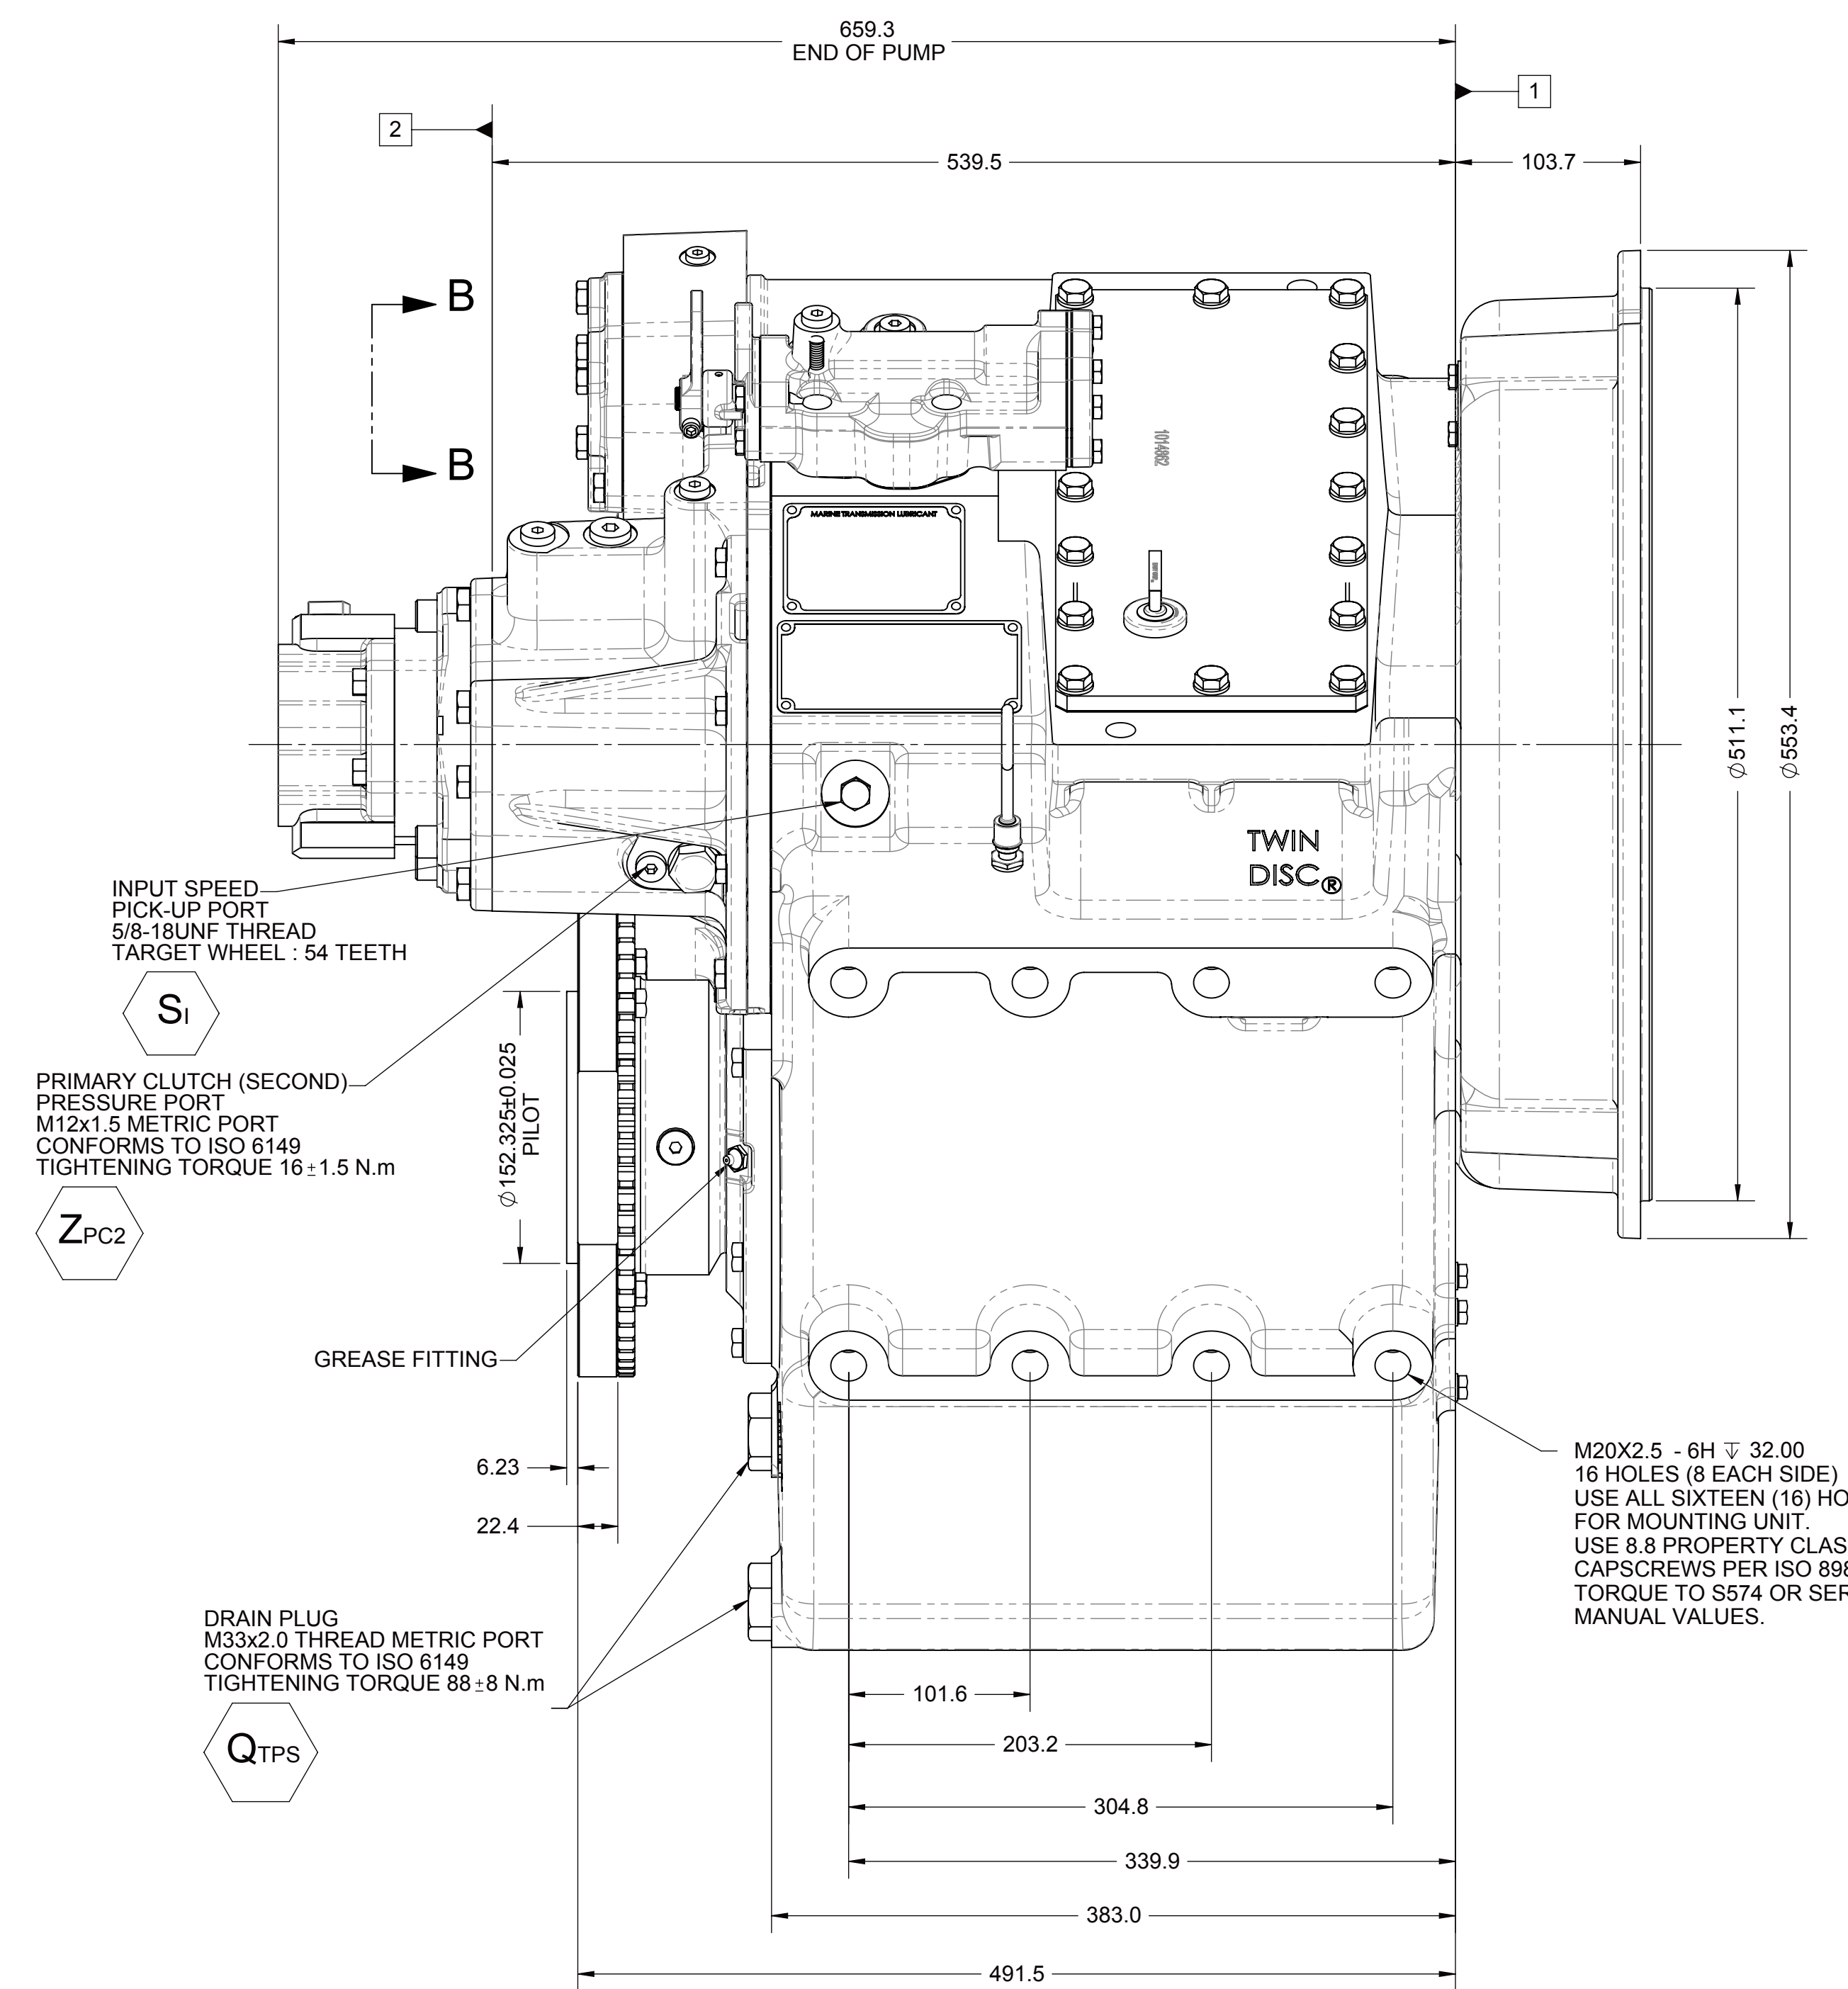
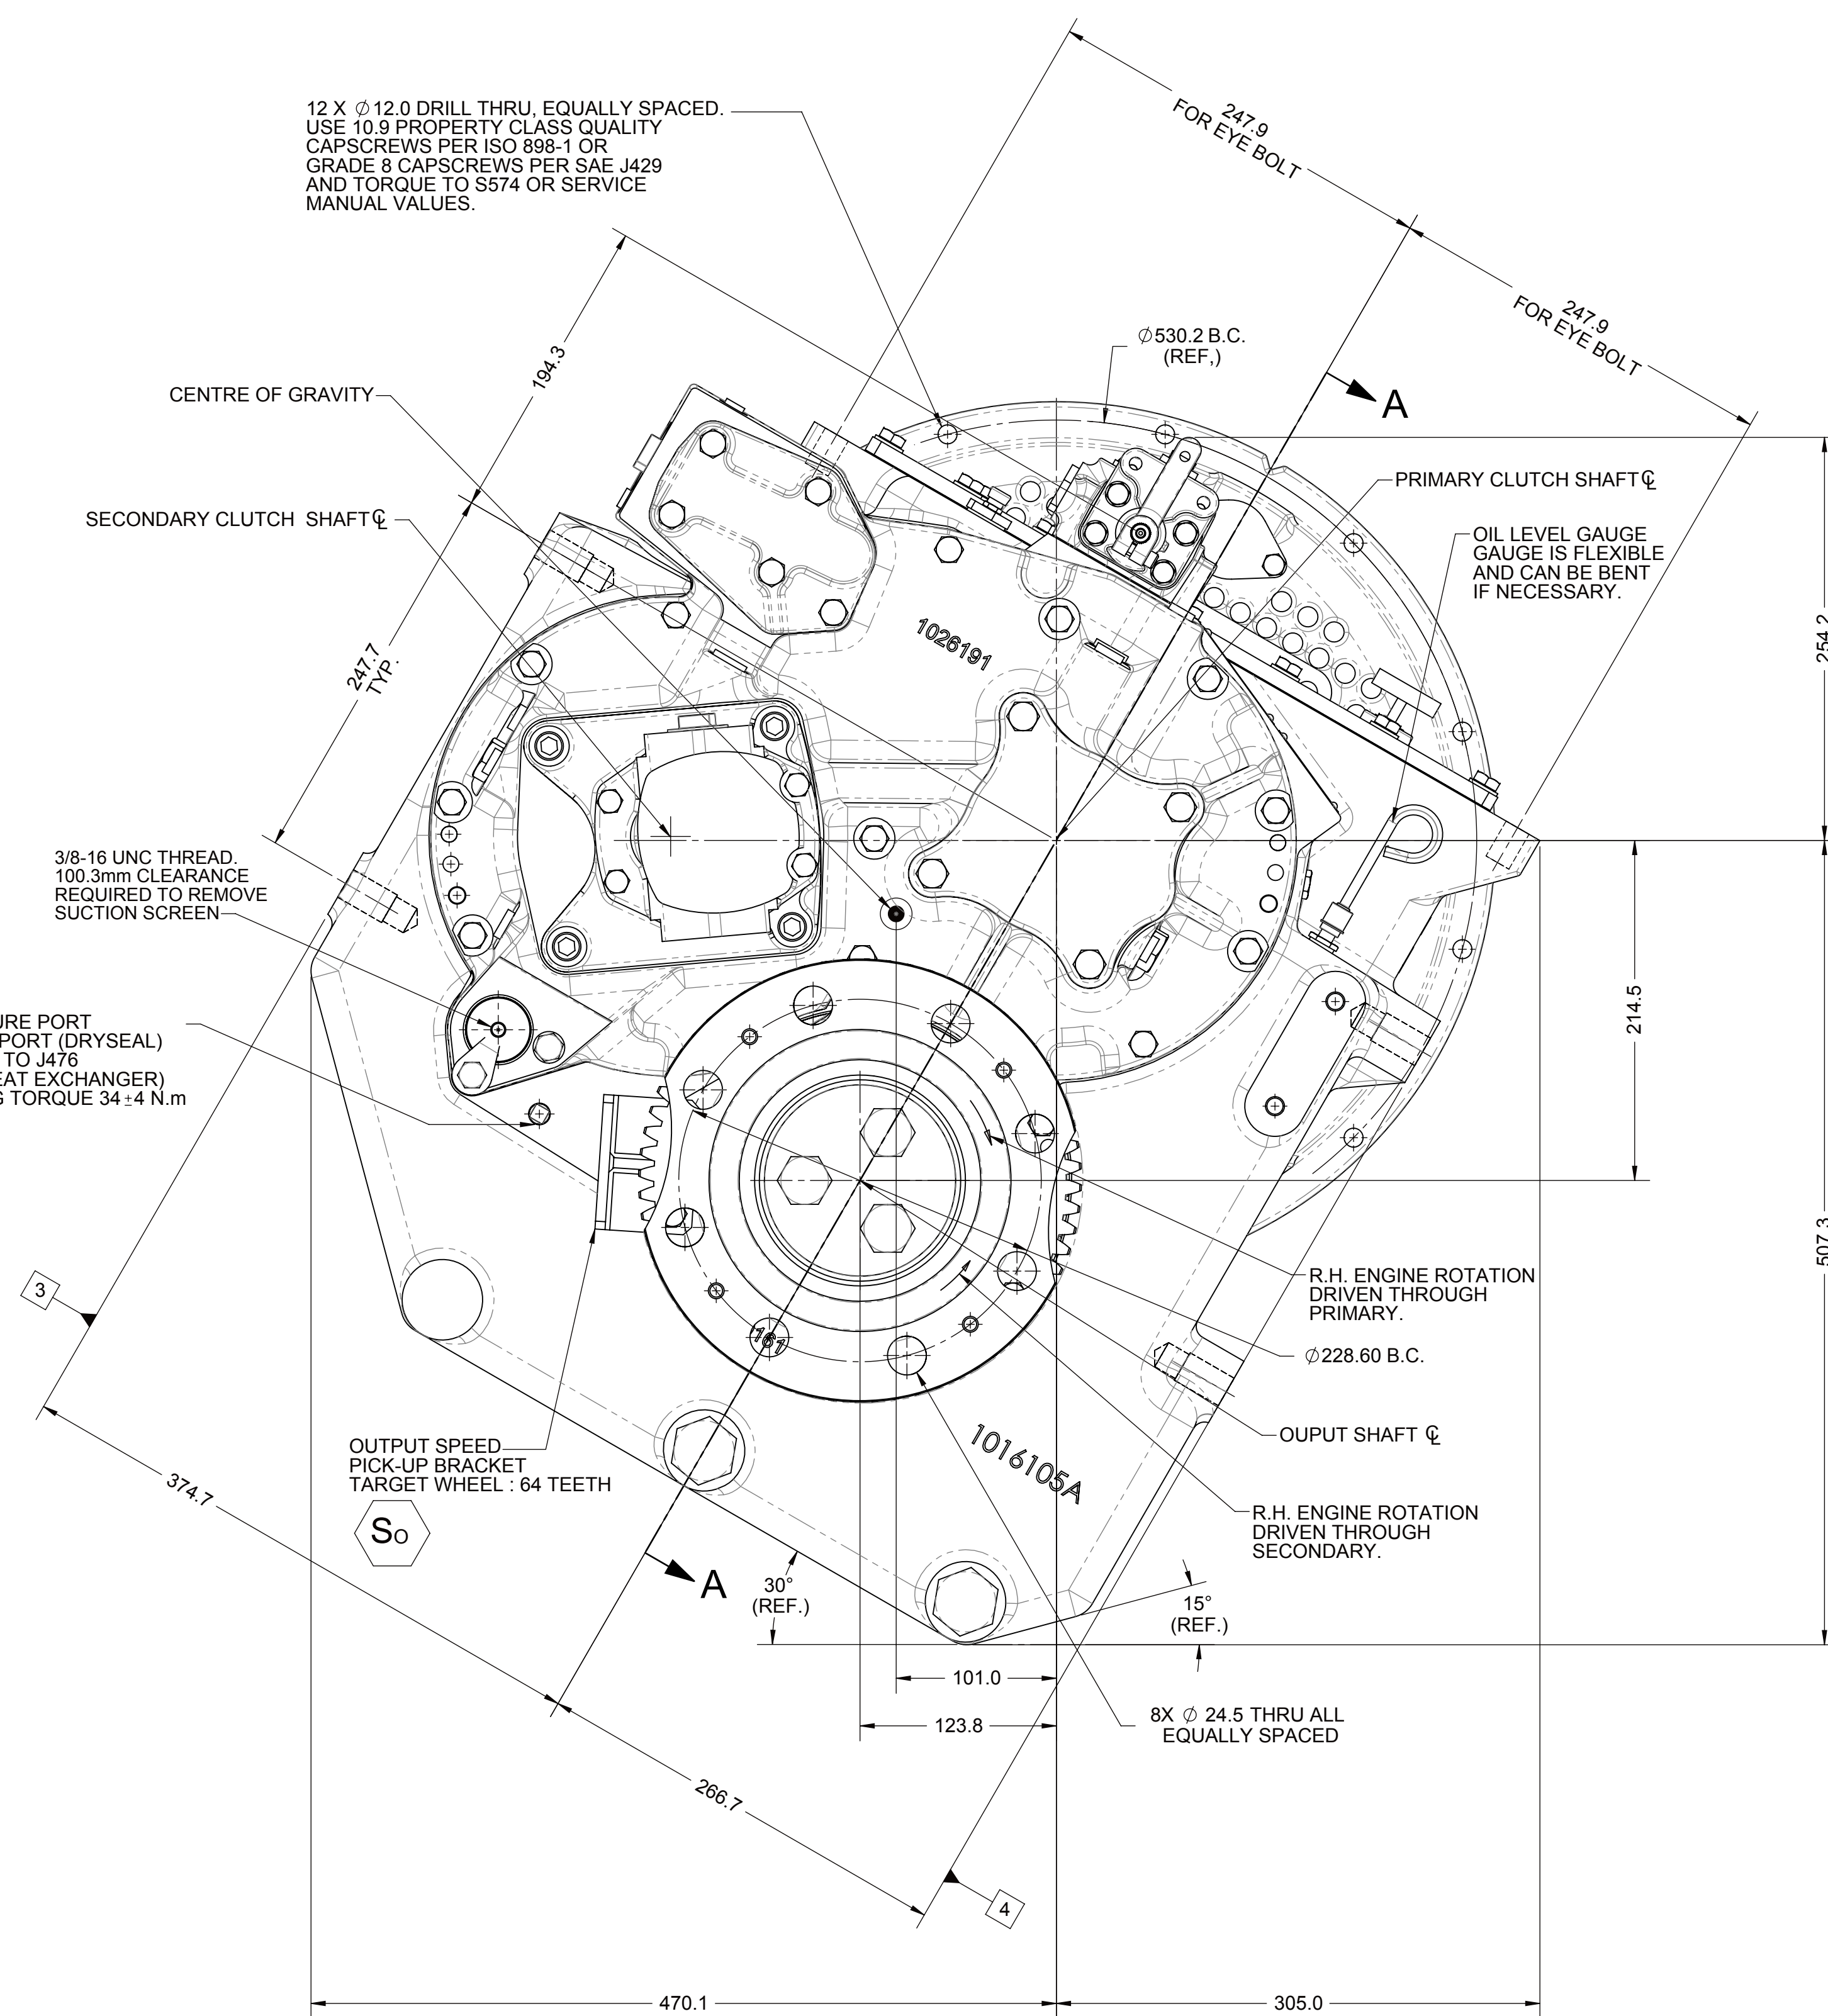
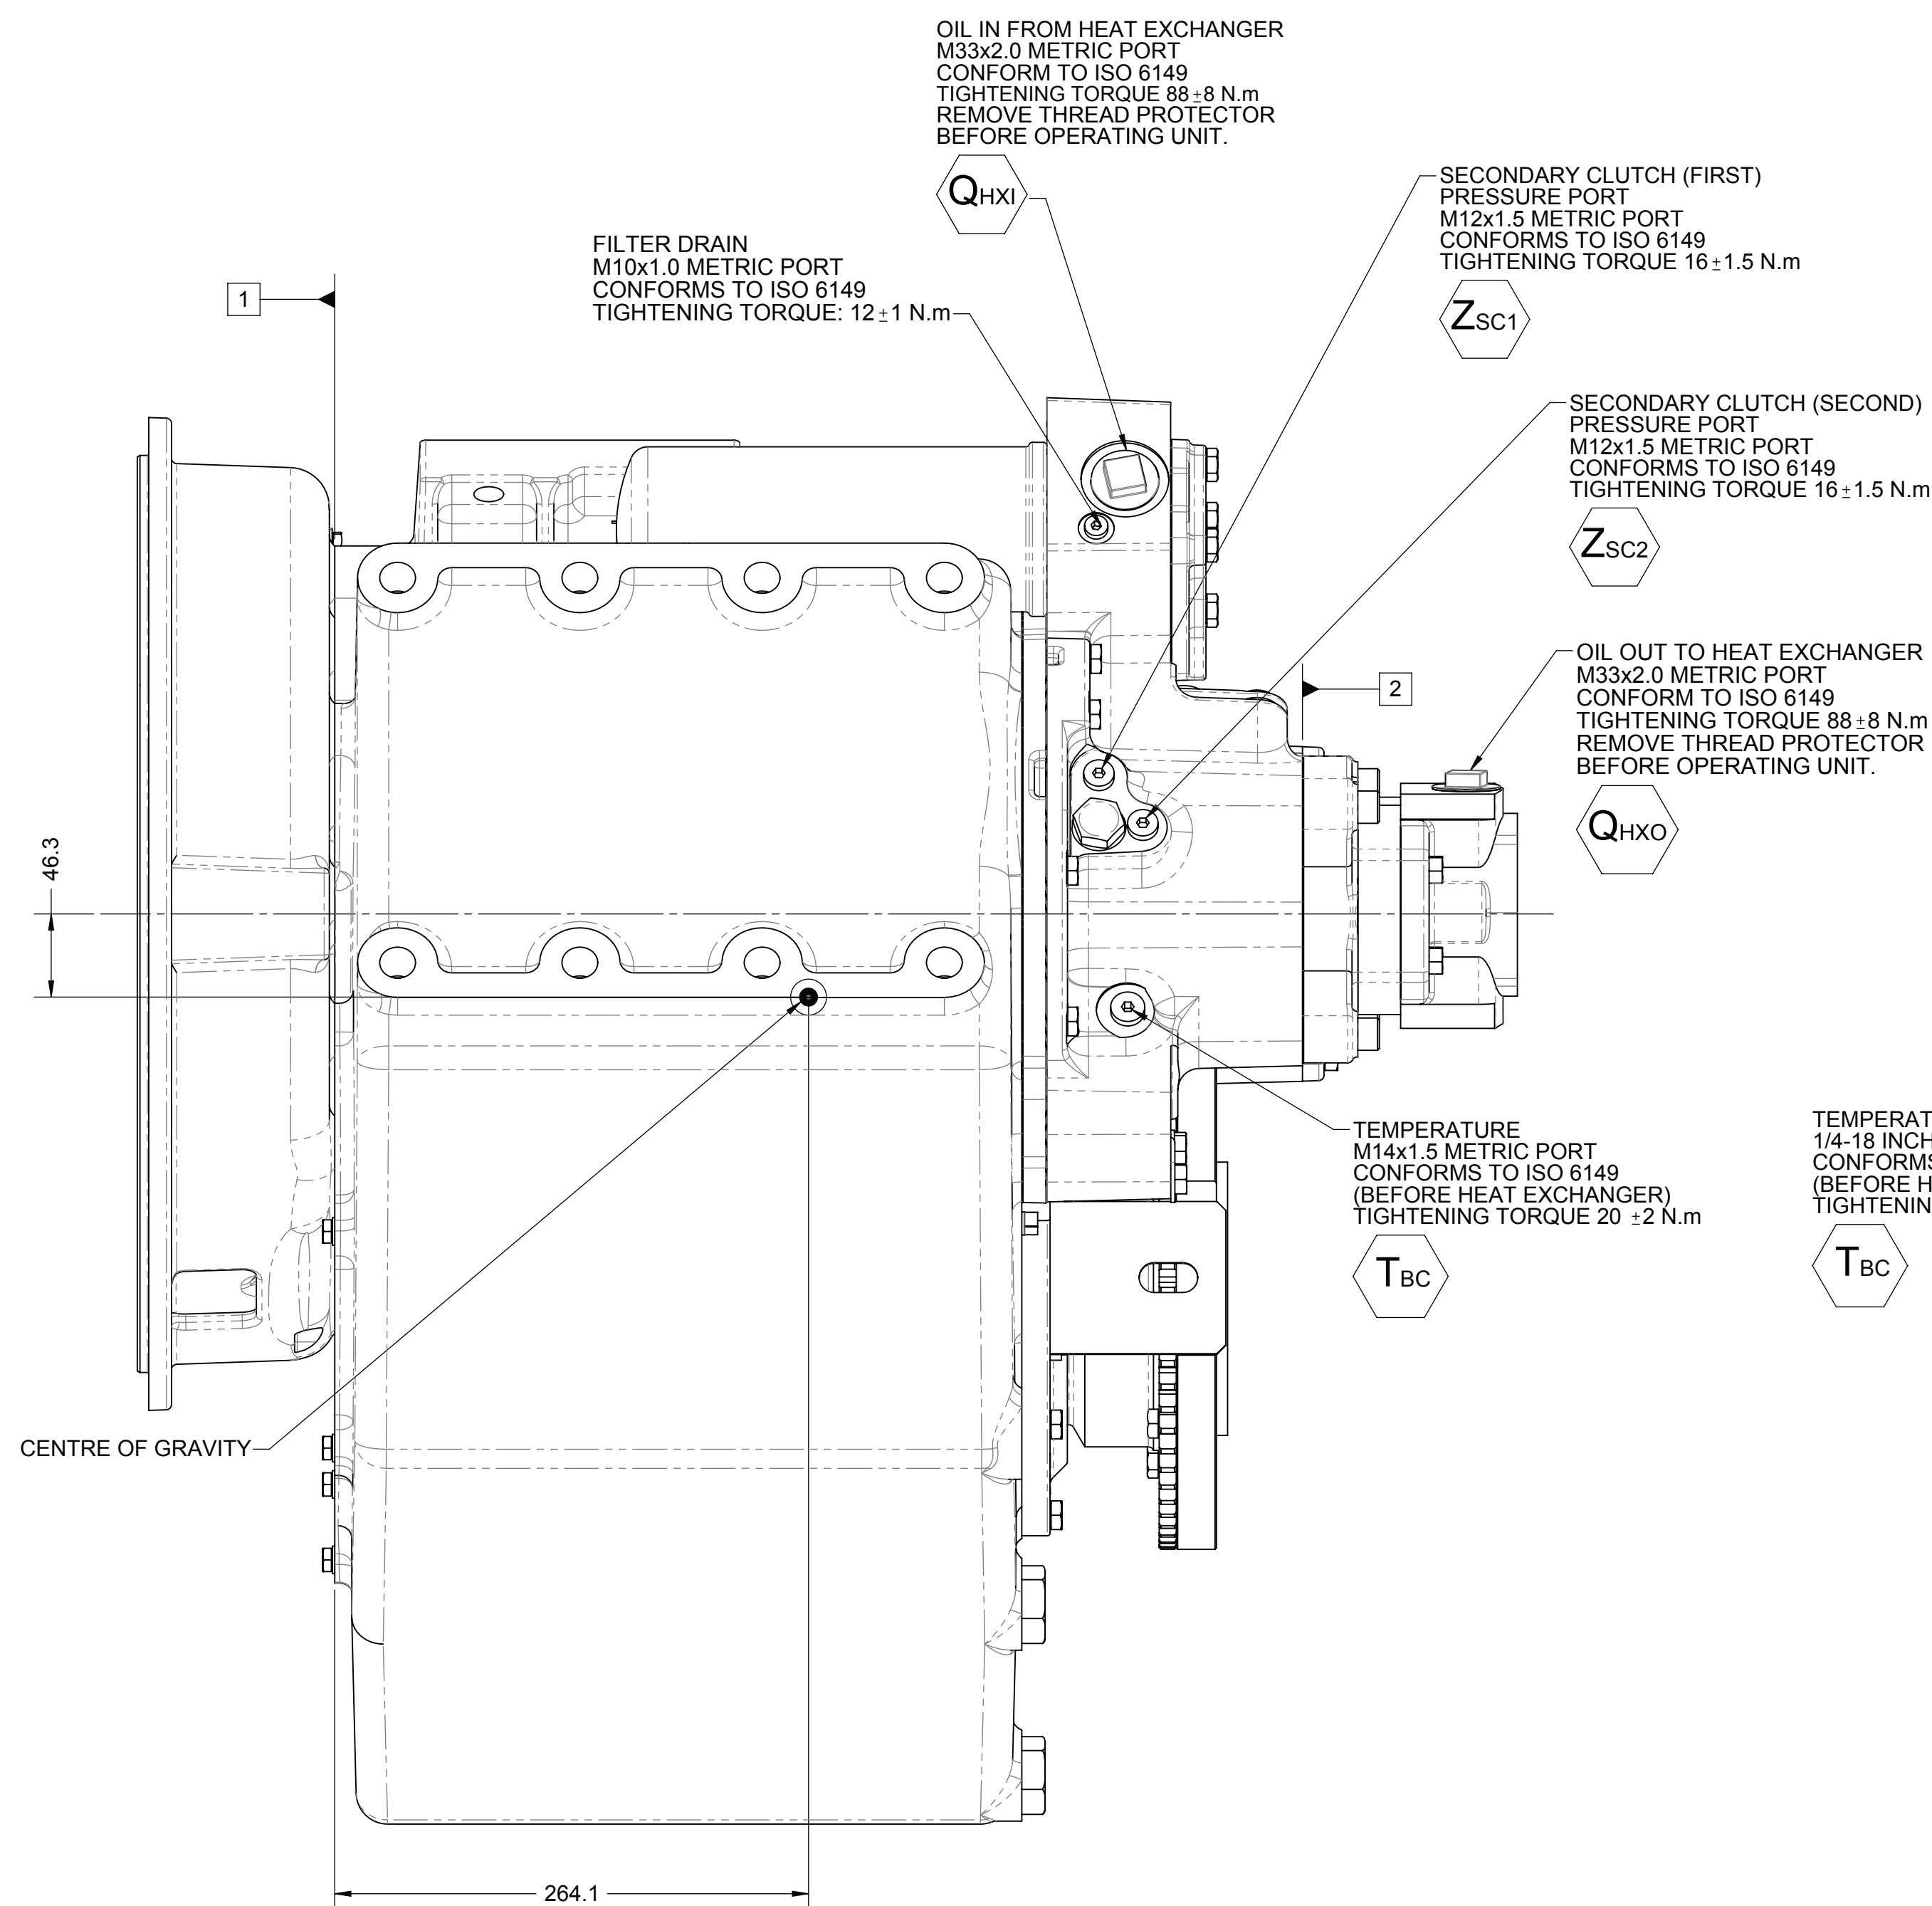
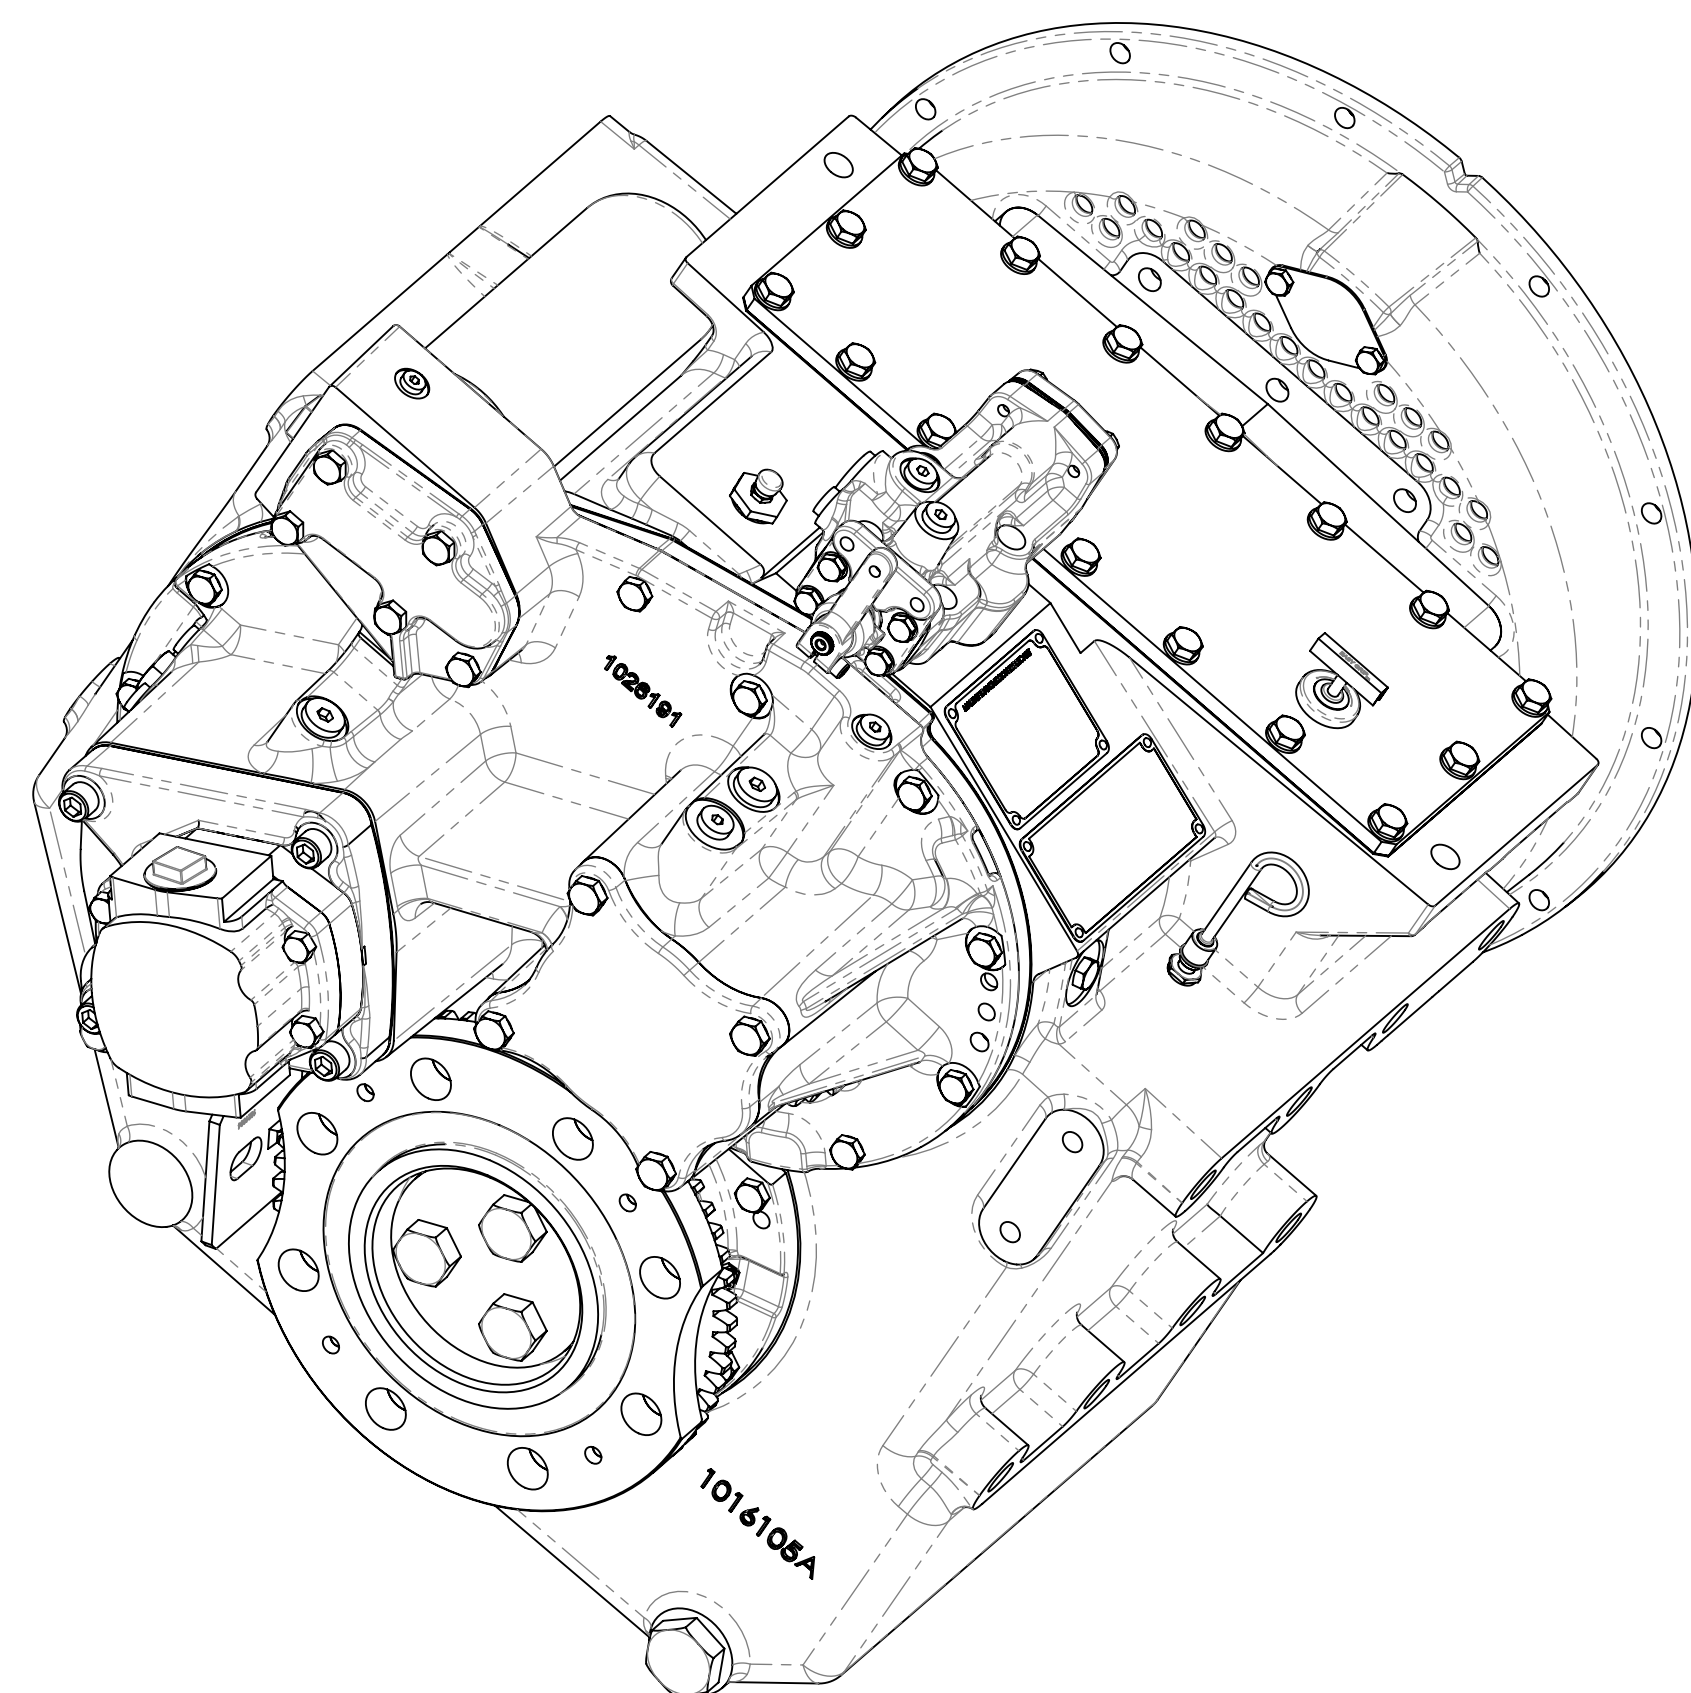
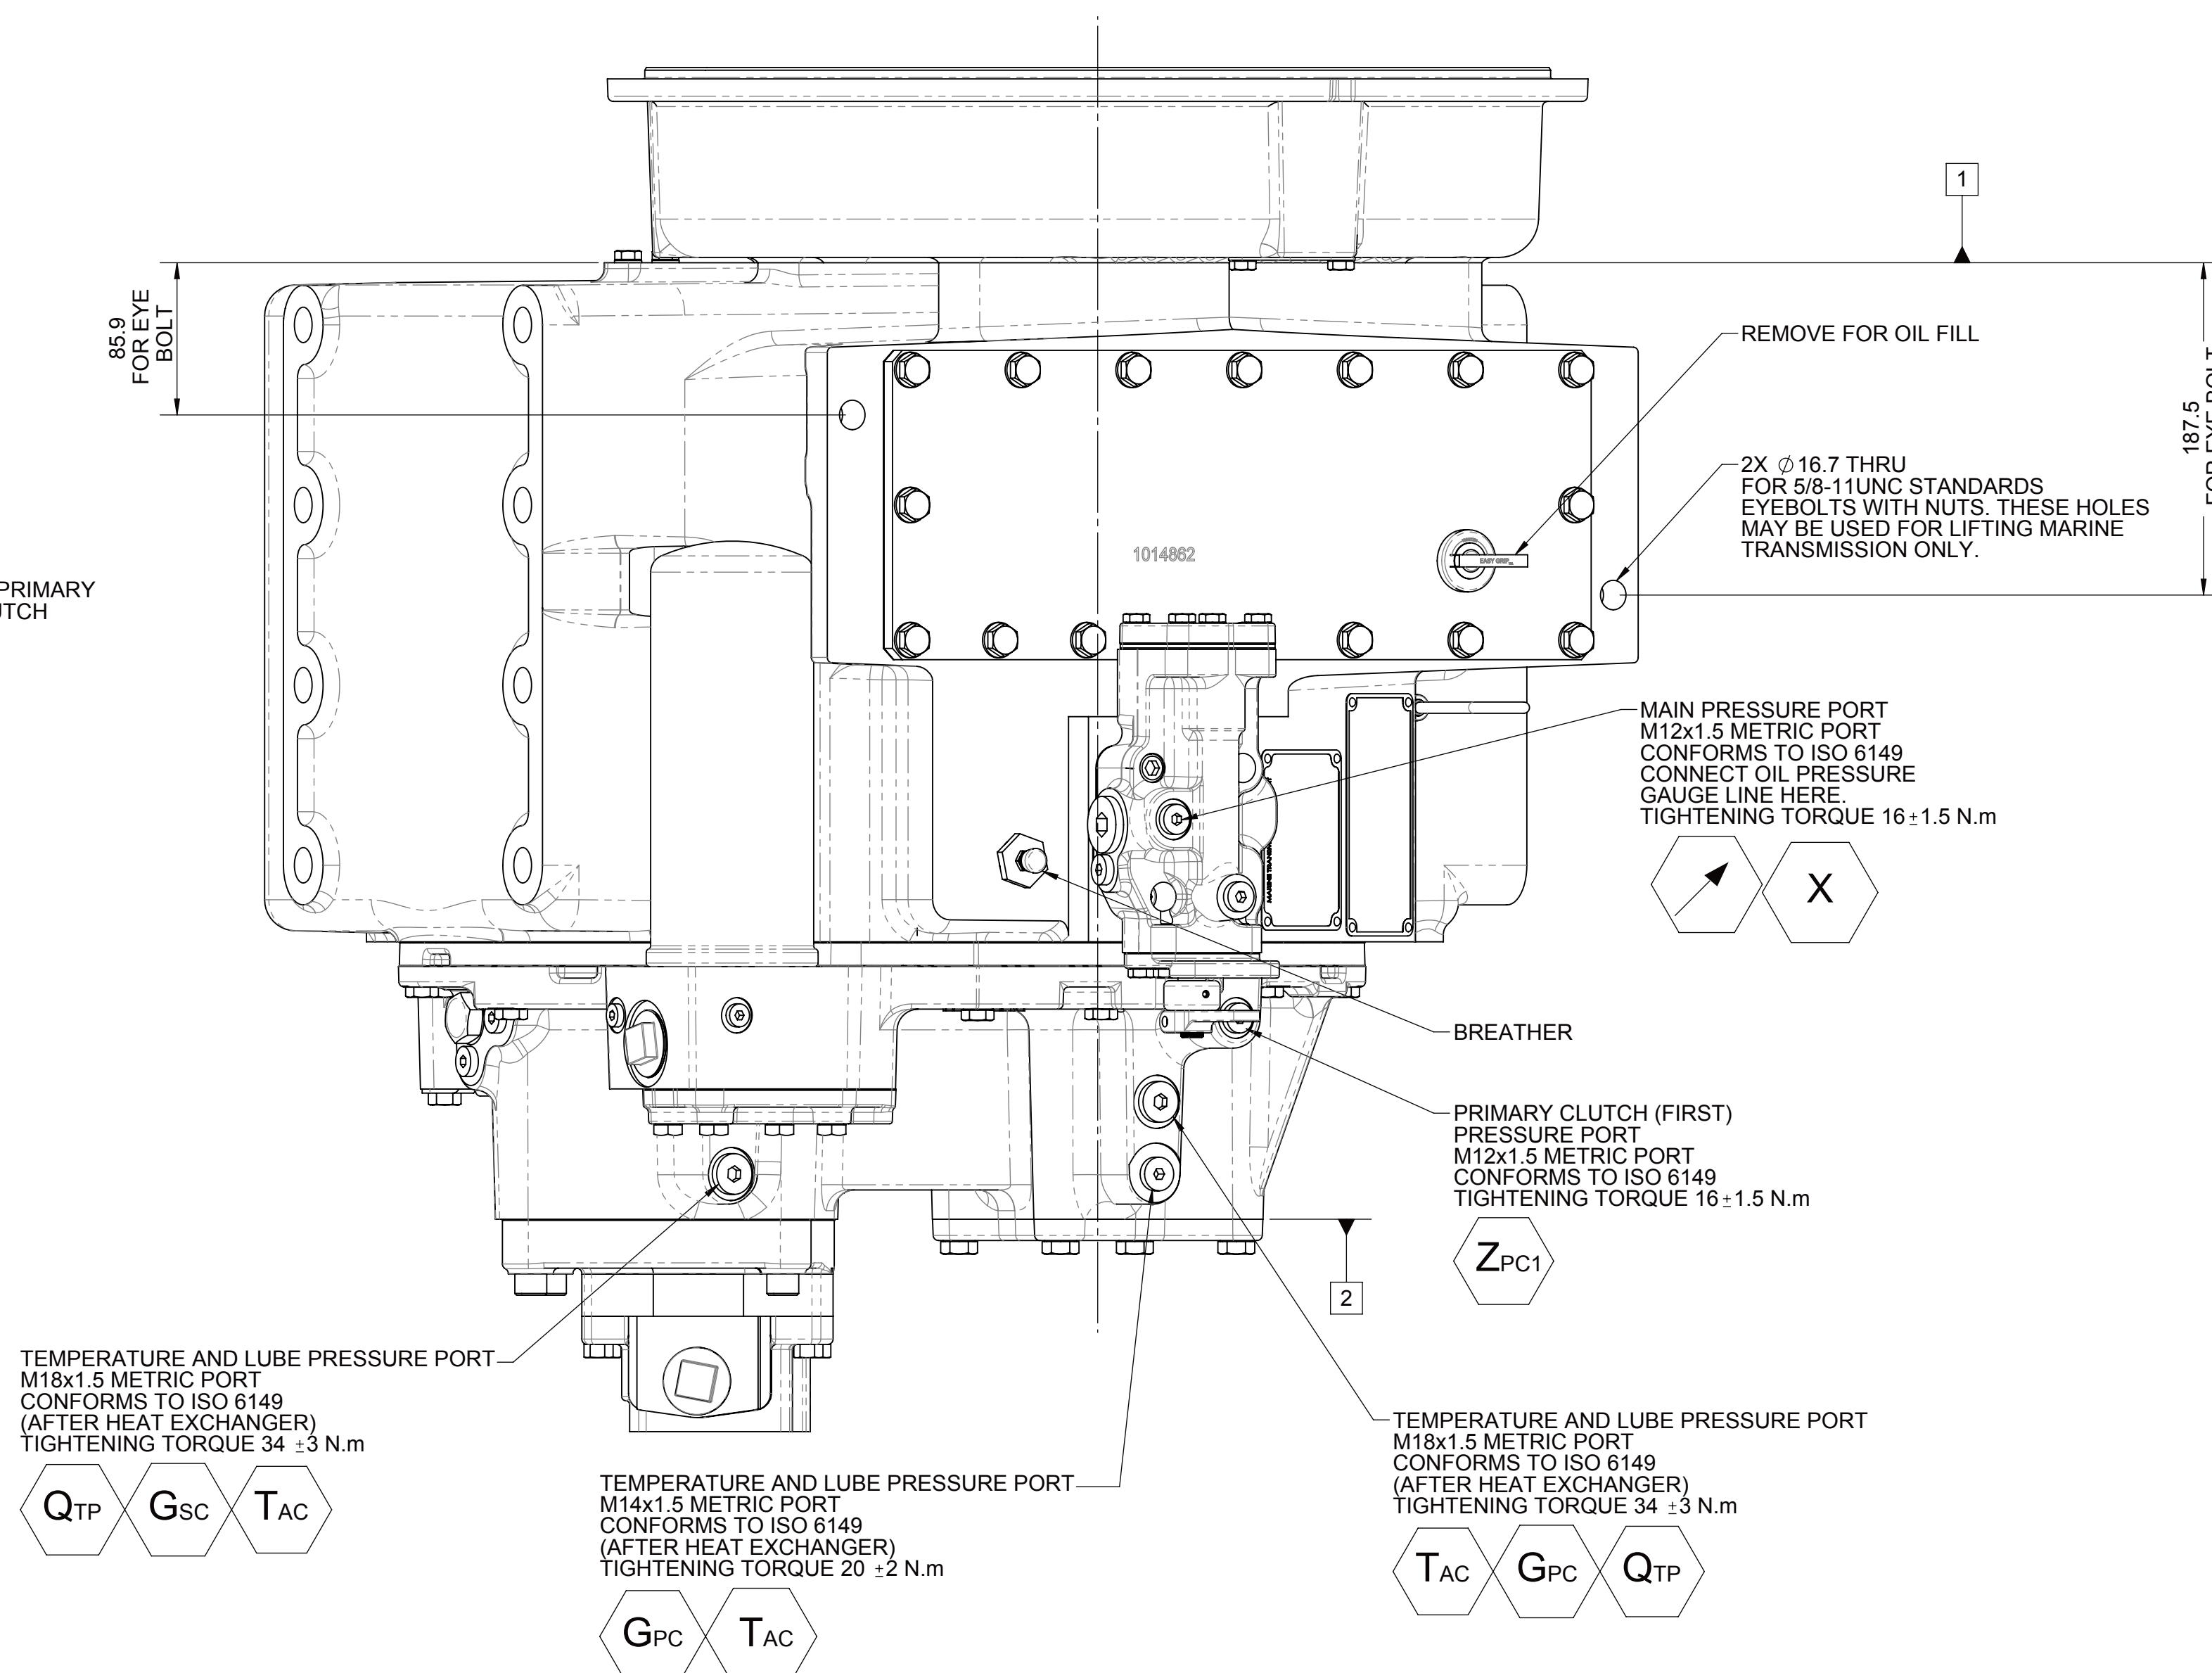


- | | |
|----------|-----------------------------|
| 1 | INPUT GROUP REFERENCE PLANE |
| 2 | PTO GROUP MOUNTING FACE |
| 3 | LEFT MOUNTING BRACKET FACE |
| 4 | RIGHT MOUNTING BRACKET FACE |

- A. REFERENCE S930 FOR TWIN DISC REQUIREMENT FOR PRESSURE AND TEMPERATURE ALARM LEVELS.
- B. UNLESS OTHERWISE SPECIFIED FASTENER TORQUE VALUES PER S574 STANDARD.
- C. ALL POINTS AVAILABLE FOR TESTING CODED.

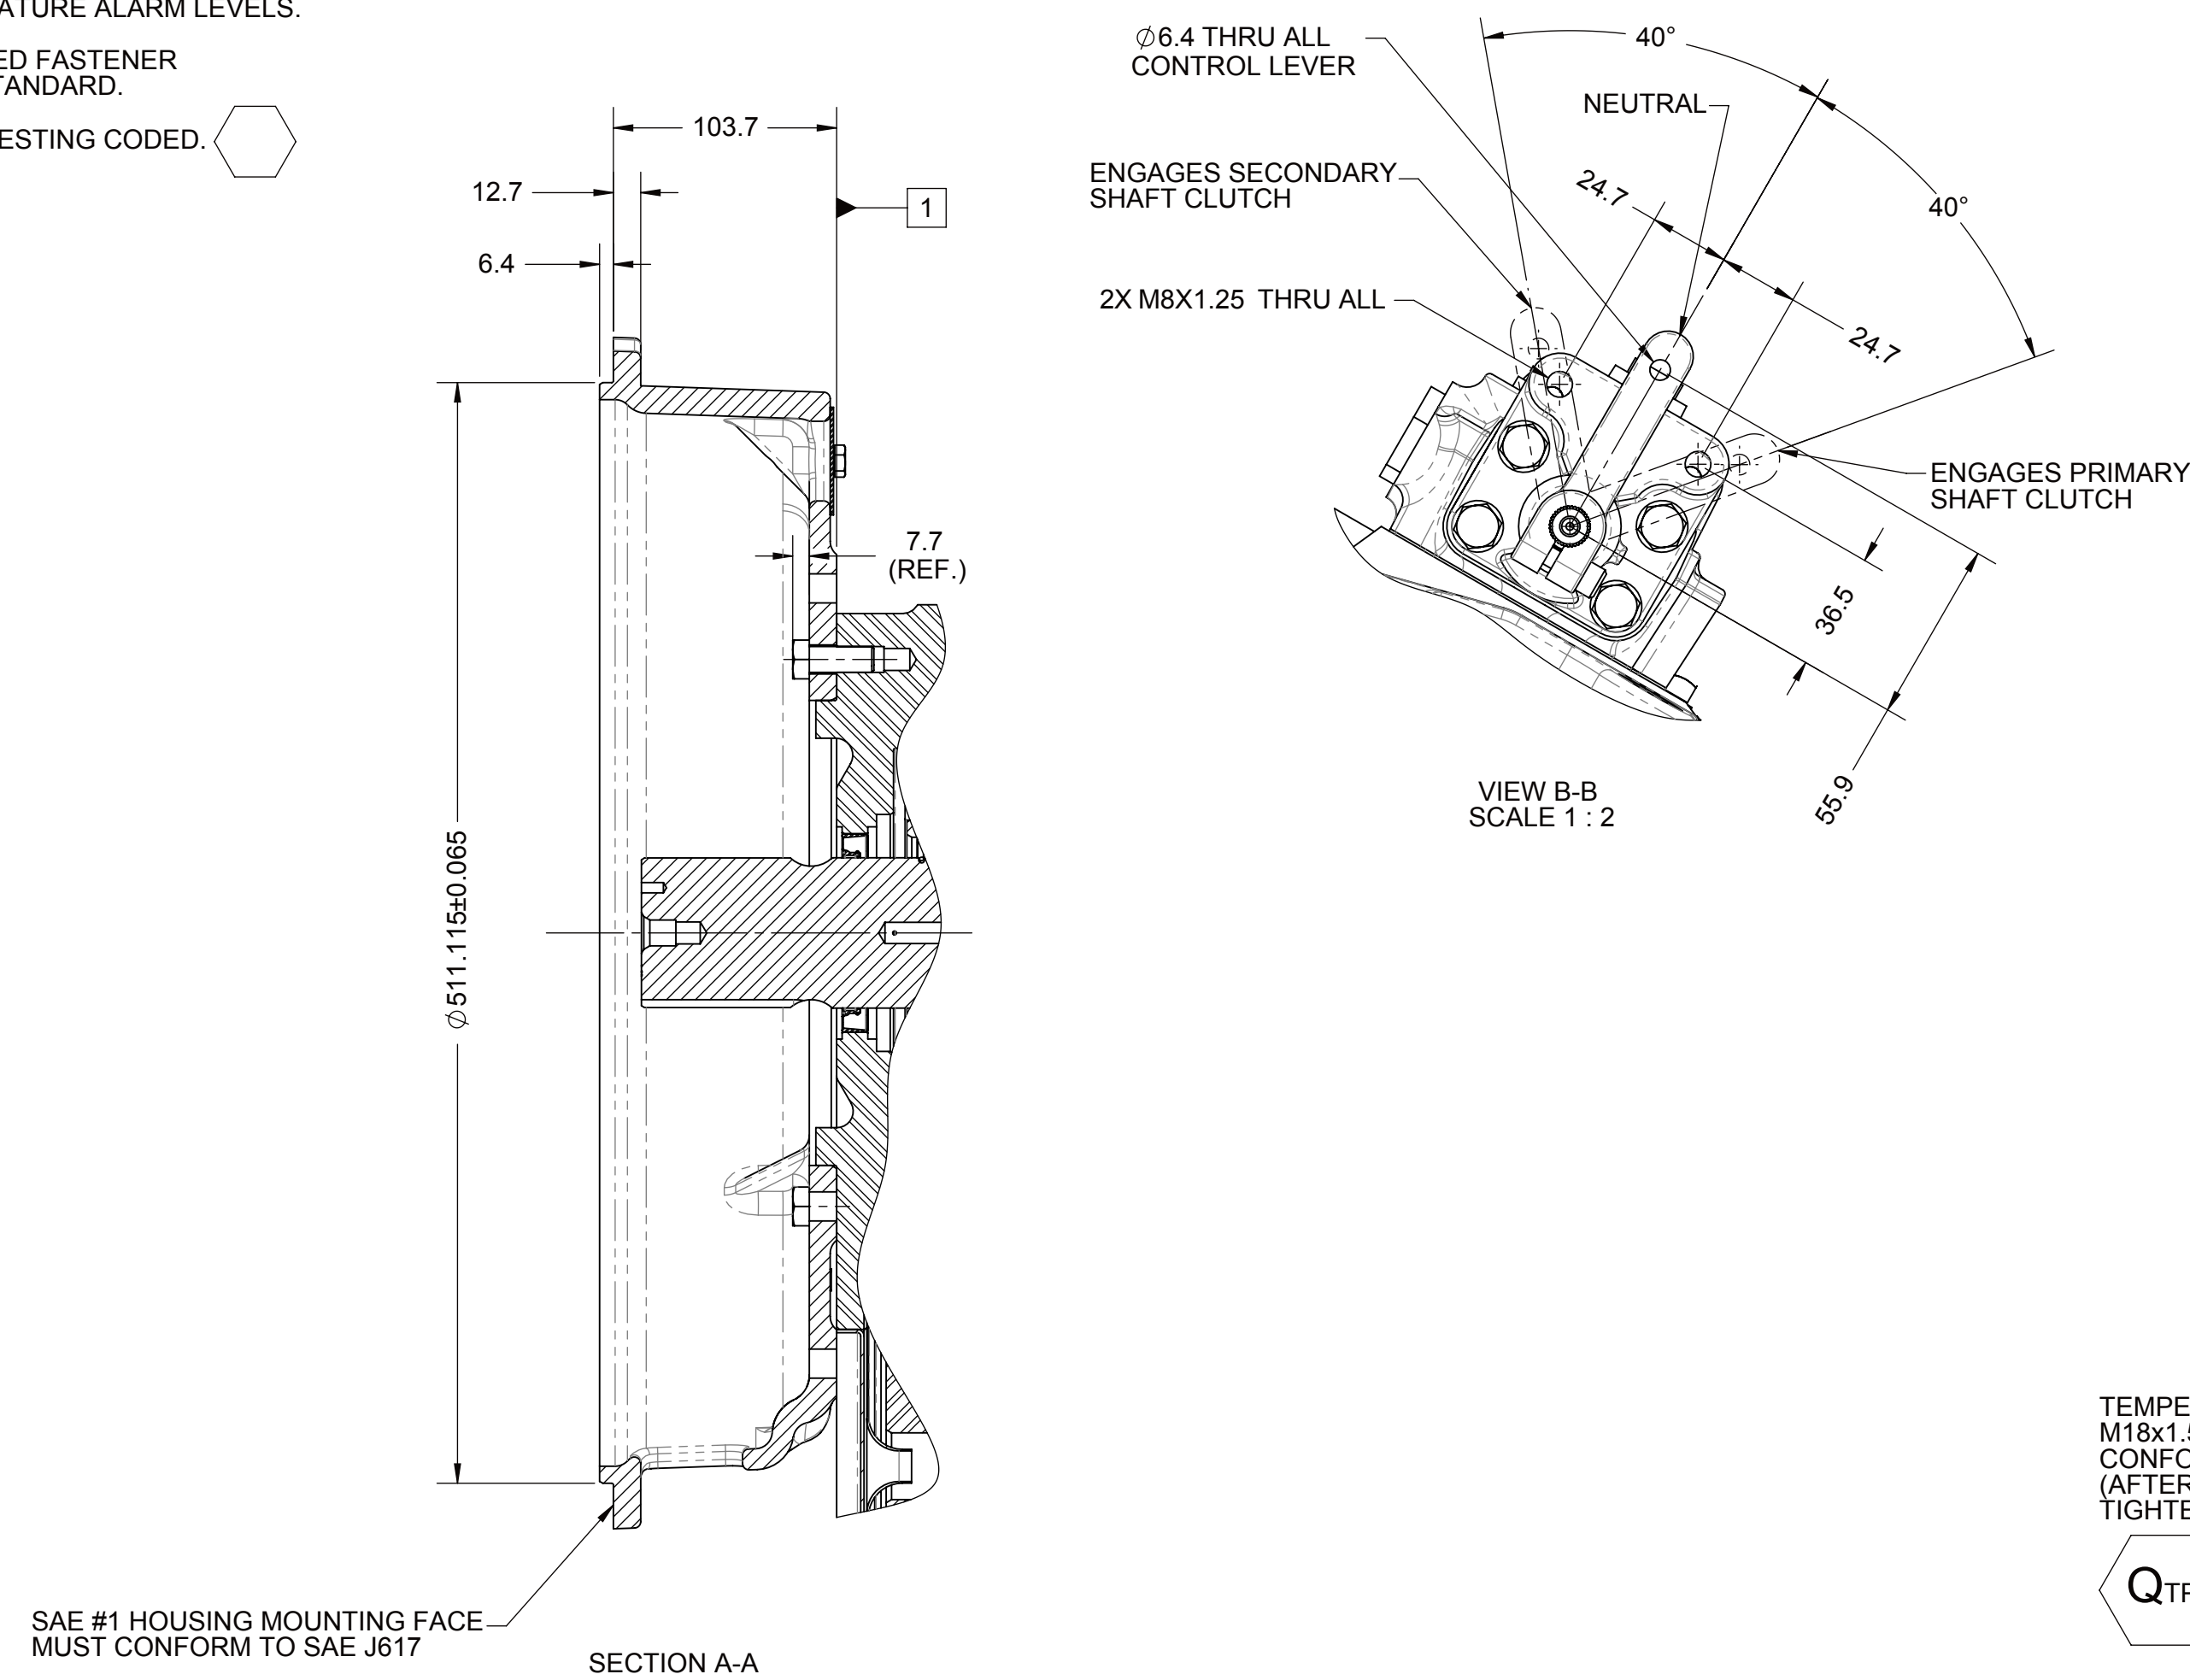

EQUIPMENT SHOWN:
- MG-5202SC PER ASSEMBLY 1027455A
- SAE #1 HOUSING
- MECHANICAL CONTROL VALVE W/O MECHANICAL TROLL
- LESS MONITORING
- COVER (NO PTO)
- LESS HEAT EXCHANGER

FIRST USE ASSEMBLY-MG-5202SC FIRST USE MODEL NO. 1027455A SIMILAR TO: 1026542A		WEIGHT: 622.82 g/m ³		 THREE ANGLE PROJECTION		MATERIAL: HEAT TREAT:		DATE: 07/25/2012 REV: CHANGE NO. DATE	
 METRIC		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS & TOLERANCES ARE: FRACTIONS DECIMALS 1/16 0.0625 1/8 0.125 3/16 0.1875 1/4 0.25 5/16 0.3125 3/8 0.375 7/16 0.4375 1/2 0.5 5/8 0.625 3/4 0.75 7/8 0.875 1 1.0 ALL ANGLES ARE TOLERANCED AT 1° UNLESS OTHERWISE SPECIFIED PER AREA: 114.30		DESCRIPTION: INSTALLATION MG-5202SC		 DISC		DATE: 07/25/2012 REV: CHANGE NO. DATE	
THIS DRAWING IS THE PROPERTY OF TWIN CORPORATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM TWIN CORPORATION. THIS DRAWING IS THE PROPERTY OF THE U.S. GOVERNMENT AND IS HEREBY ON TRANSFERRED BY CONTRACT.		DRAWN BY: PM CHECKED BY: J3 APPROVED BY: NEC		DRAWN BY: A0 CHECKED BY: 1 APPROVED BY: 1		DATE: 07/25/2012 REV: CHANGE NO. DATE		TWIN DISC 1027455A	