1 **INPUT GROUP REFERENCE PLANE**
2 PTO GROUP MOUNTING FACE
3 LEFT MOUNTING BRACKET FACE
4 RIGHT MOUNTING BRACKET FACE

NOTES:
A. SWITCH IS NORMALLY CLOSED WHEN MANUAL DIRECTIONAL CONTROL VALVE IS IN THE CENTERED POSITION AND OPEN WHEN LEVER IS ACTUATED FROM CENTERED POSITION.
B. CURRENT = 20 AMP MAX.
C. ALL POINTS AVAILABLE FOR TESTING ARE CODED ⬡.
D. REFERENCE S930 FOR TWIN DISC REQUIREMENTS FOR PRESSURE AND TEMPERATURE ALARMS.

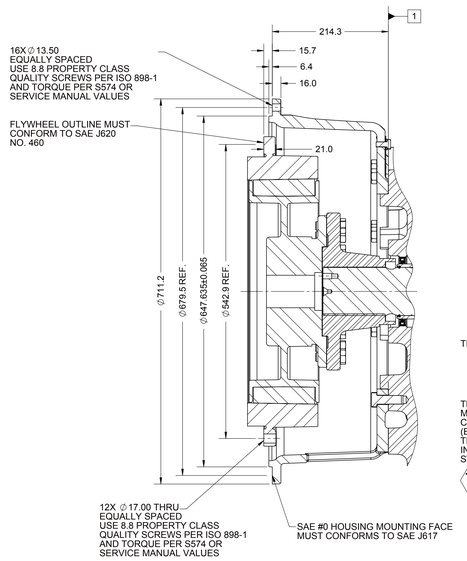

SECTION A-A

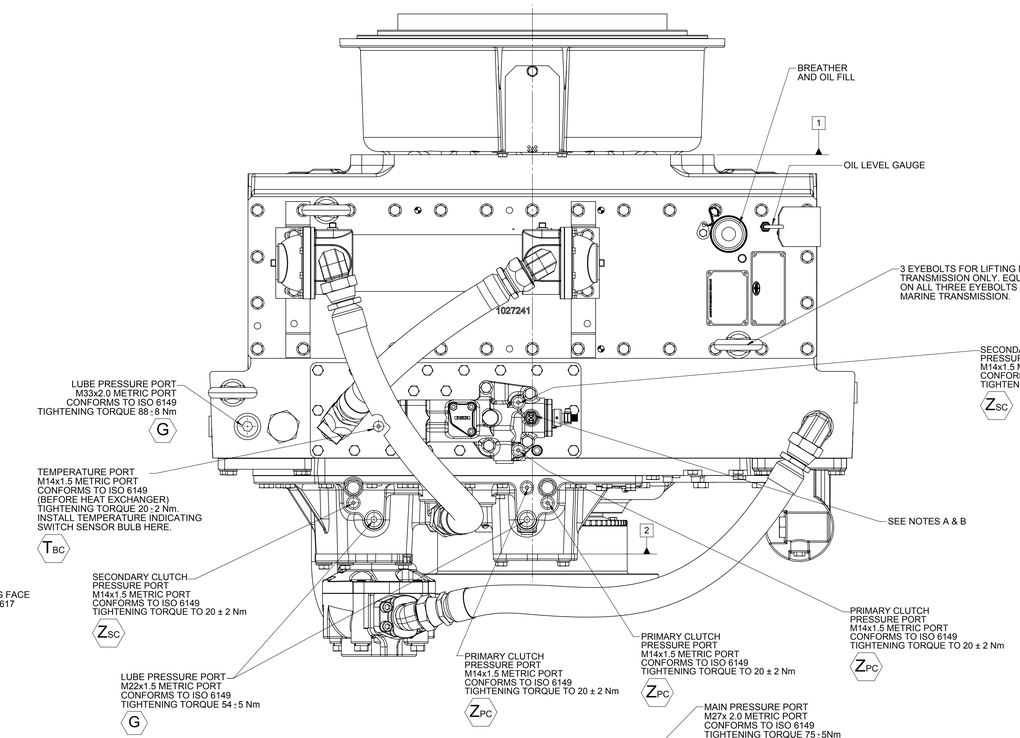

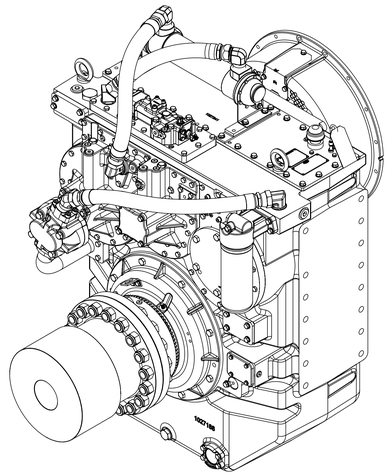

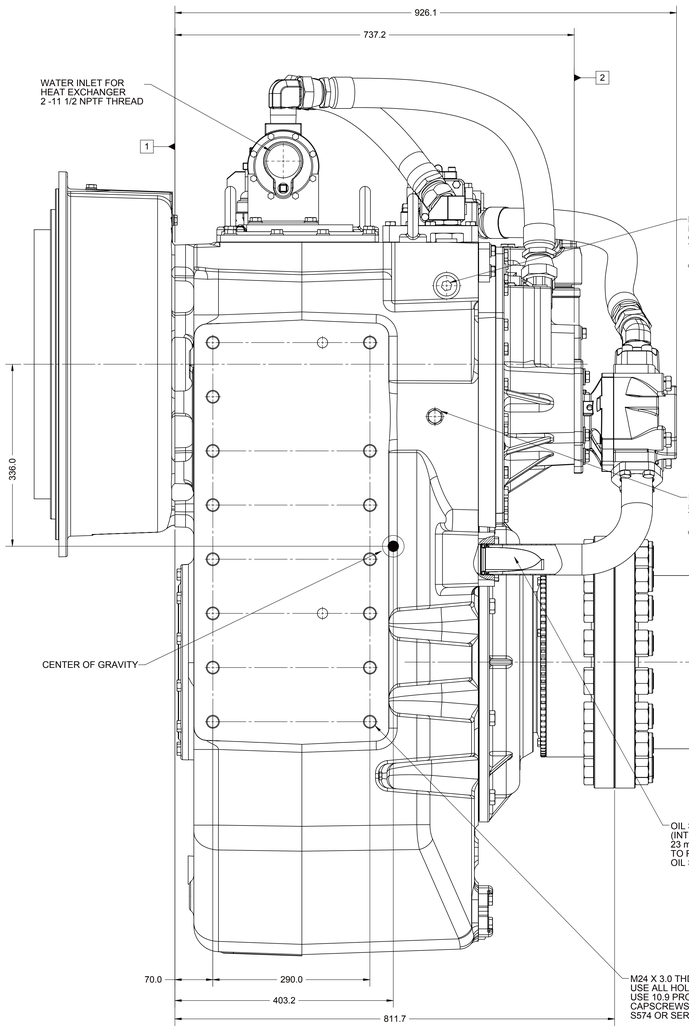

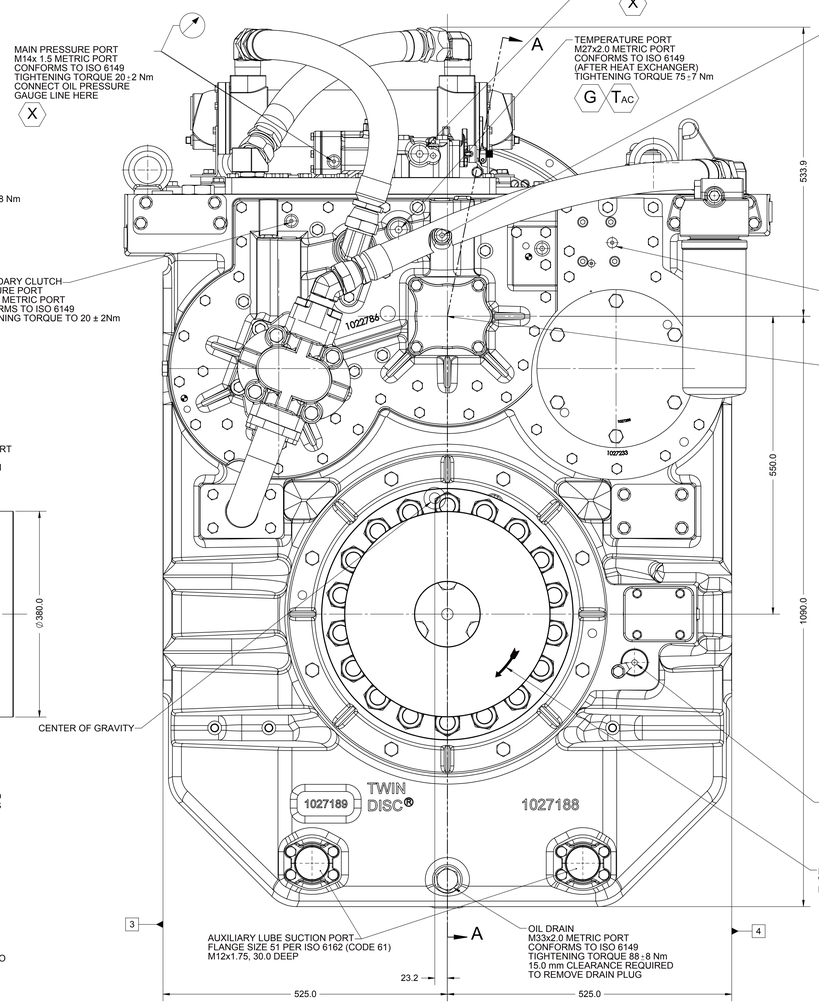

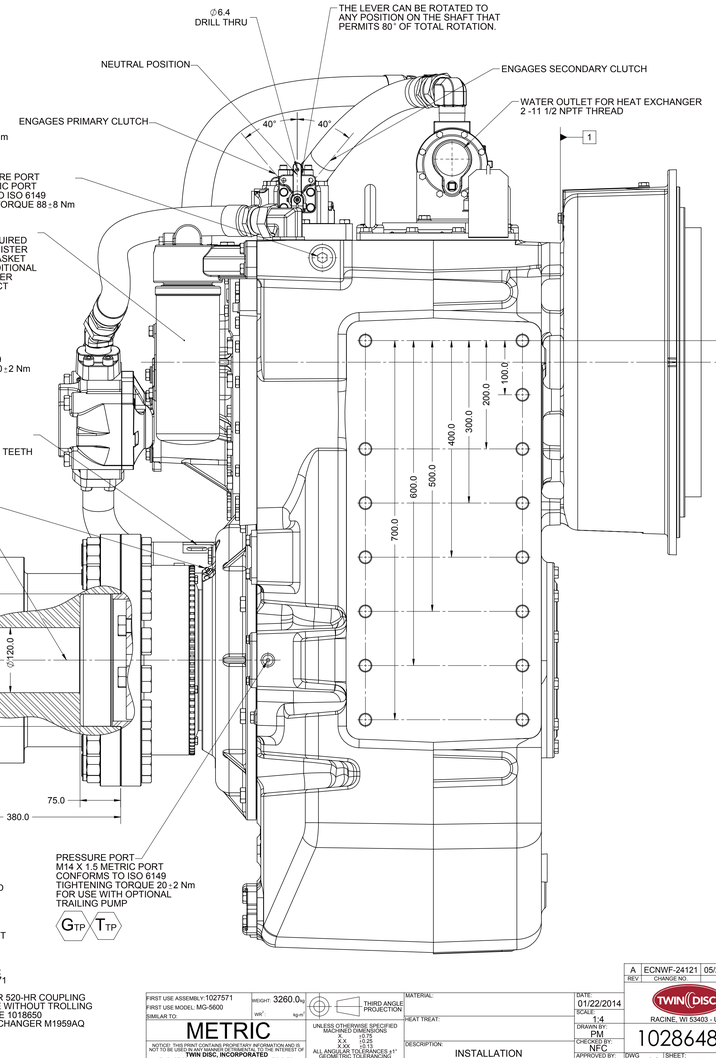

EQUIPMENT SHOWN:
- MG-5600 PER 1027571
- SAE #0
- SAE 460 CENTA CF-R 520-HR COUPLING
- MECHANICAL VALVE WITHOUT TROLLING
- COMPANION FLANGE 1018650
- MOUNTED HEAT EXCHANGER M1959AQ

REV	CHANGE NO.	DATE
A	ECNWF-24121	05/28/2014

FIRST USE ASSEMBLY: 1027571
FIRST USE MODEL: MG-5600
SIMILAR TO:
WEIGHT: 3260.0 lb / kg
METRIC
THIRD ANGLE PROJECTION
UNLESS OTHERWISE SPECIFIED MACHINED DIMENSIONS X ±0.76, XX ±0.25, XXX ±0.13; ALL ANGULAR TOL ±1°; GEOMETRIC TOLERANCING PER ASME Y14.5M 1994
MATERIAL:
HEAT TREAT:
DESCRIPTION: INSTALLATION MG-5600
DATE: 01/22/2014
SCALE: 1:4
DRAWN BY: PM
CHECKED BY: NPC
APPROVED BY: ALC
DWG SIZE: A0
SHEET: 4 OF 6
REV: A
TWIN DISC
RACINE, WI 53403 - USA
1028648A

NOTICE: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF TWIN DISC, INCORPORATED
THIS NOTICE DOES NOT LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.

J I H G F E D C B A
8 7 6 5 4 3 2 1