


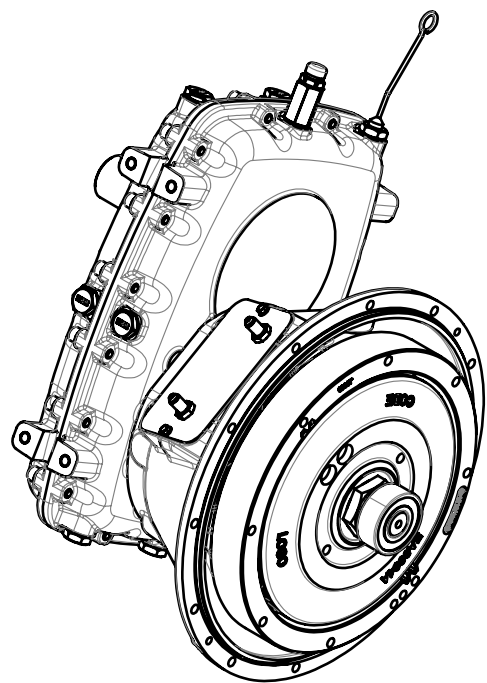

(B)

OBSOLETE FOR PRODUCTION




GENERAL NOTES:
a.) REFER TO PRODUCT LIST WHEN ORDERING PARTS
b.) REFER TO CARE & OPERATION MANUAL FOR ADDITIONAL INFO.
c.) REFER TO PIPING DRAWING 1029340D FOR HYDRAULIC CONNECTIONS.

RECOMMENDED
FLYWHEEL BORE
72.009
71.994

DISENGAGE PORT
5/16 37° MALE FLARE
1/2-20 UNF-2B
SEE NOTE C)

ENGAGE PORT
5/16 37° MALE FLARE
1/2-20 UNF-2B
SEE NOTE C)

CLUTCH INPUT RO211 SAE 3

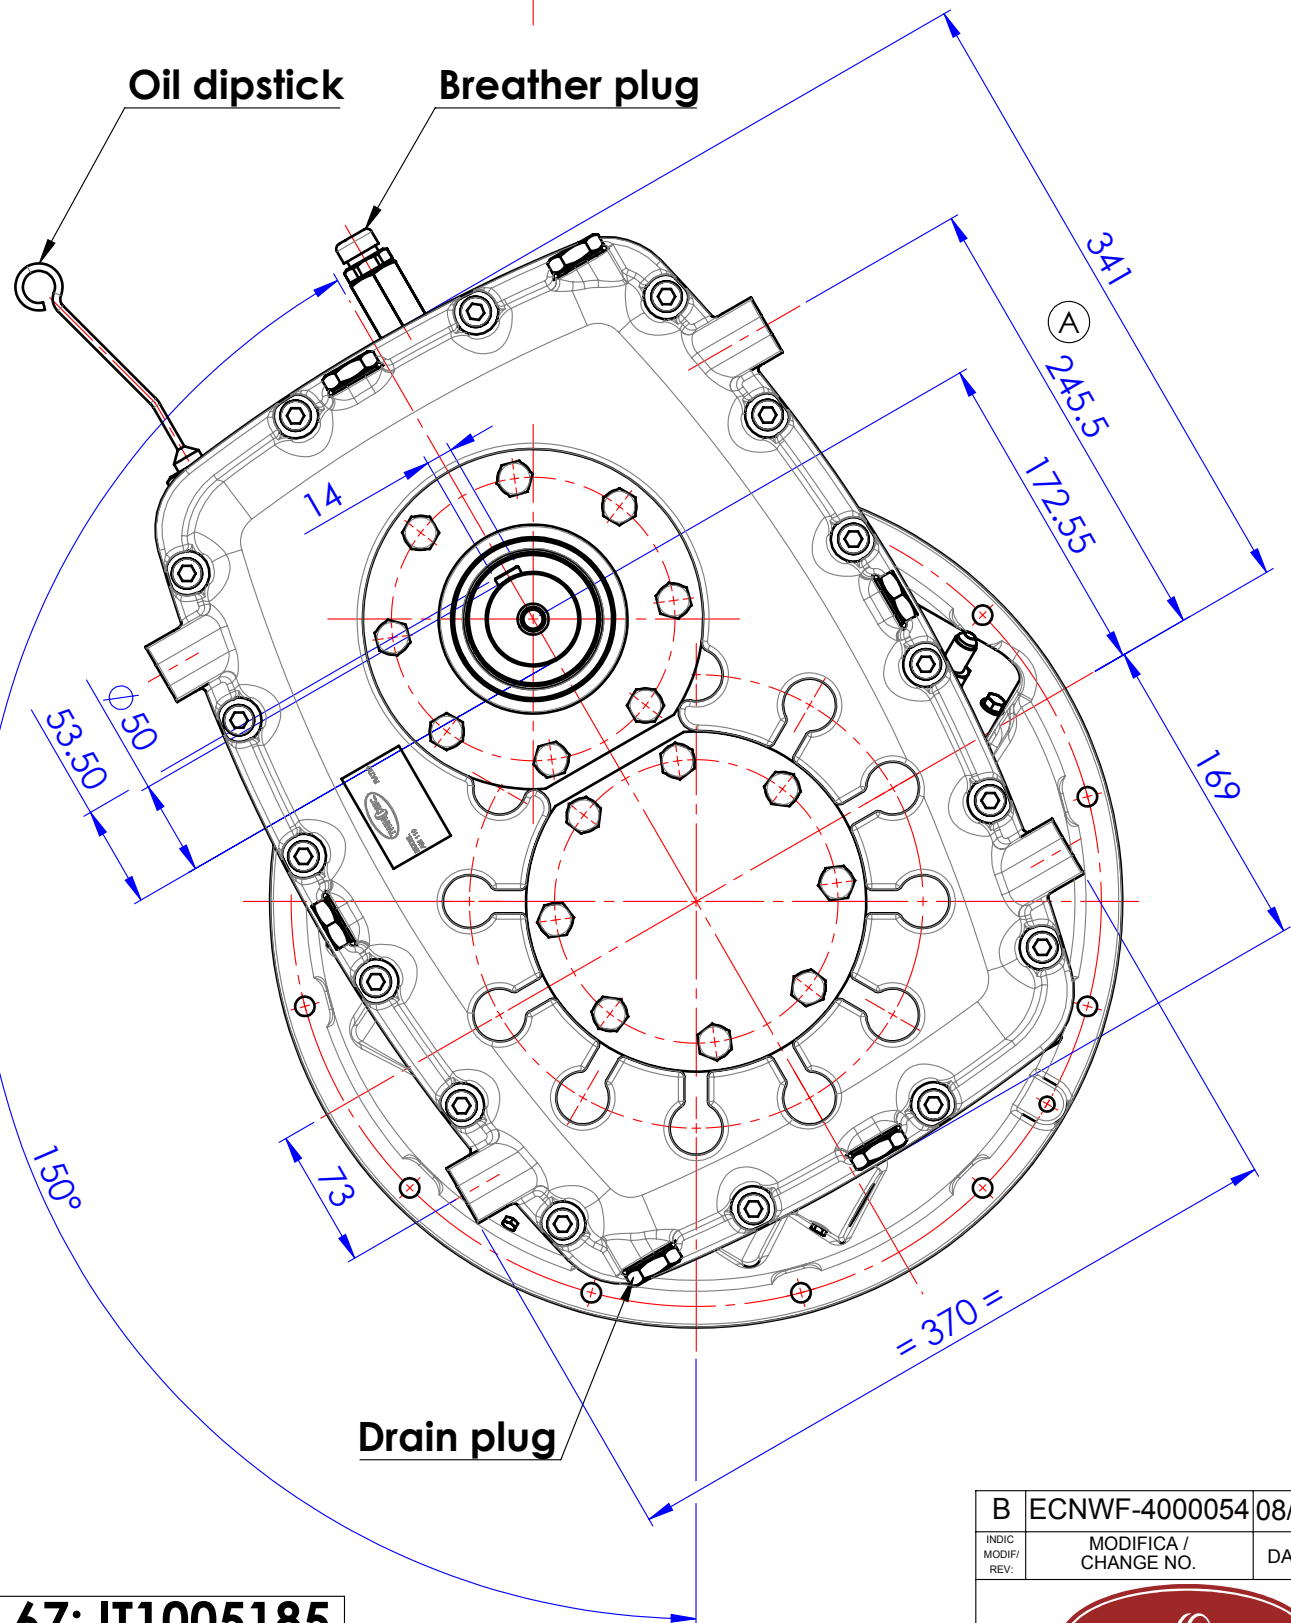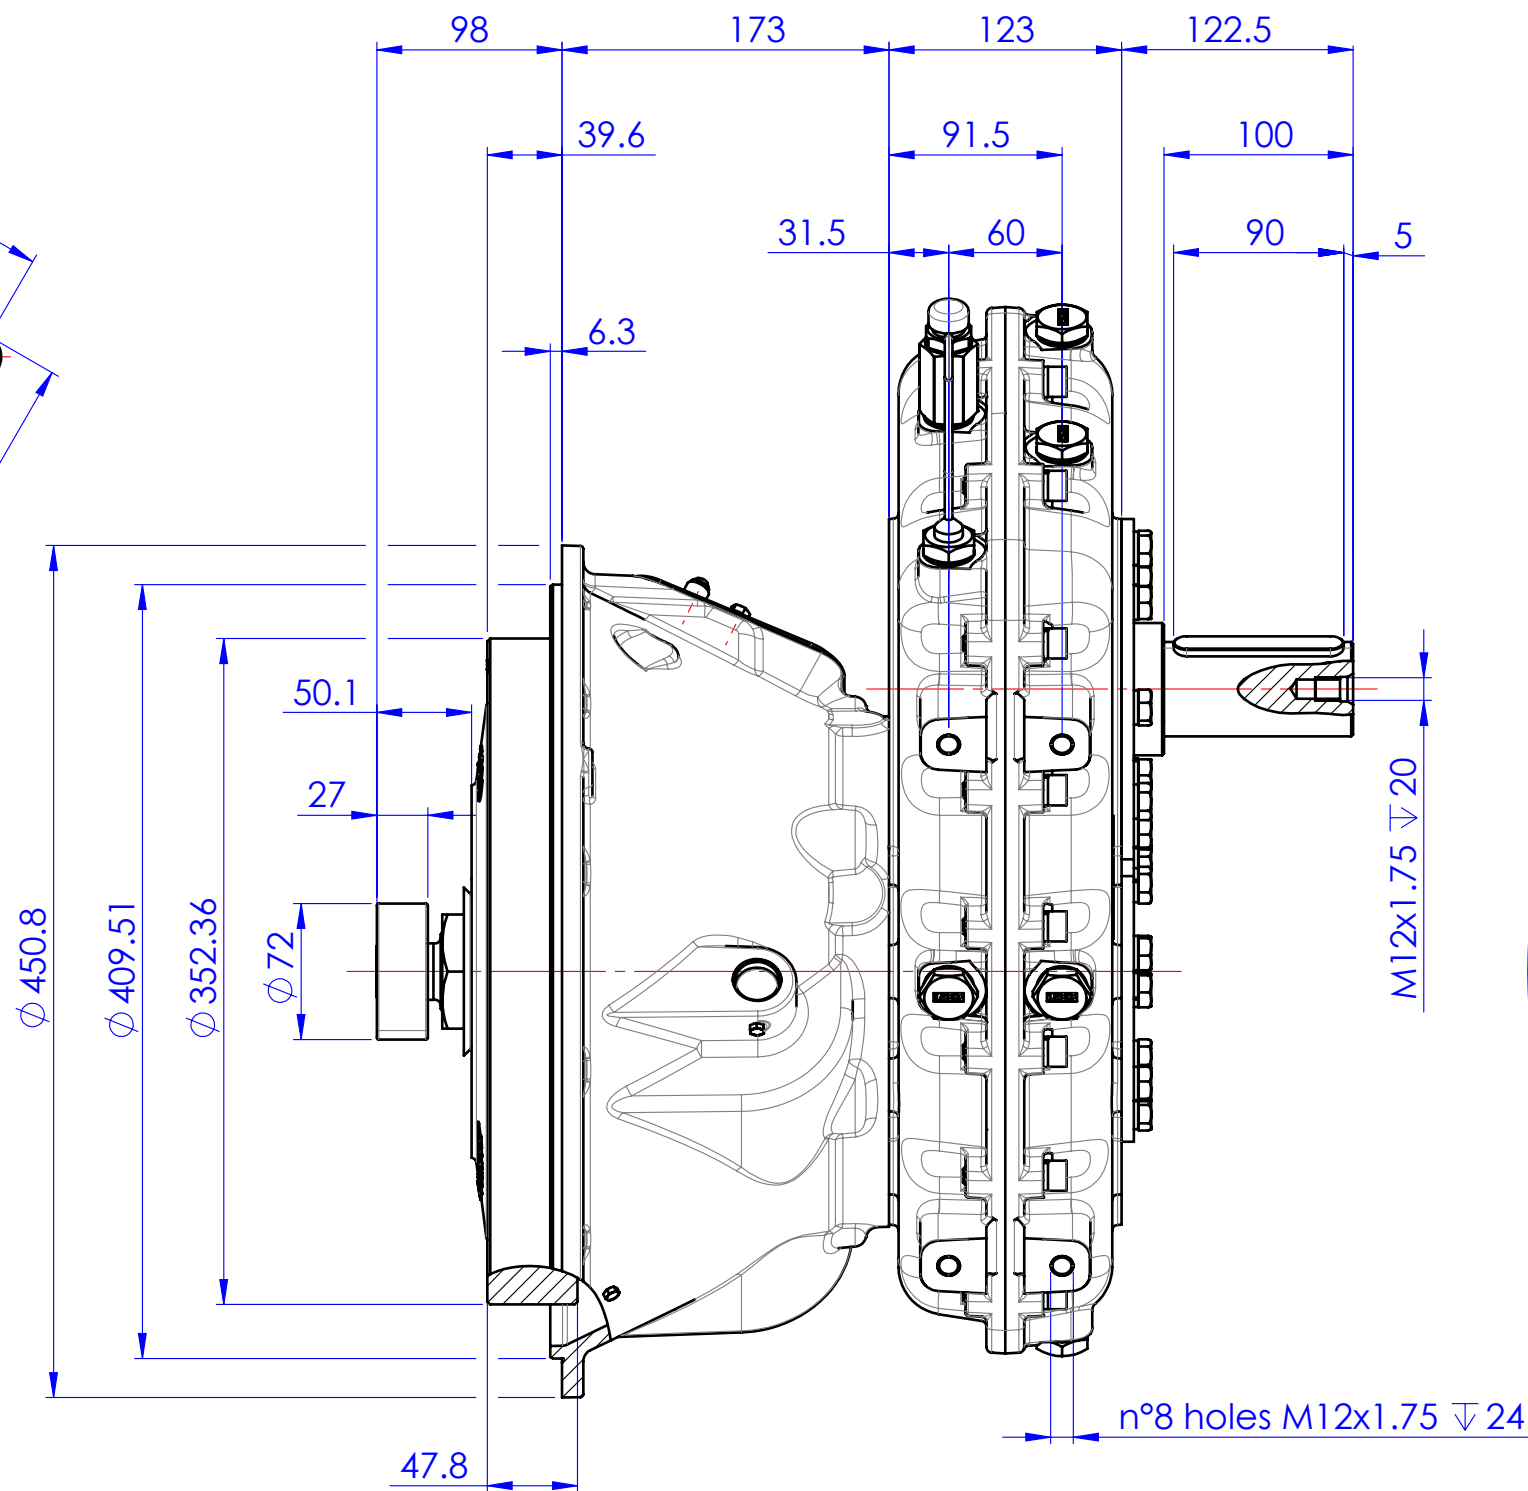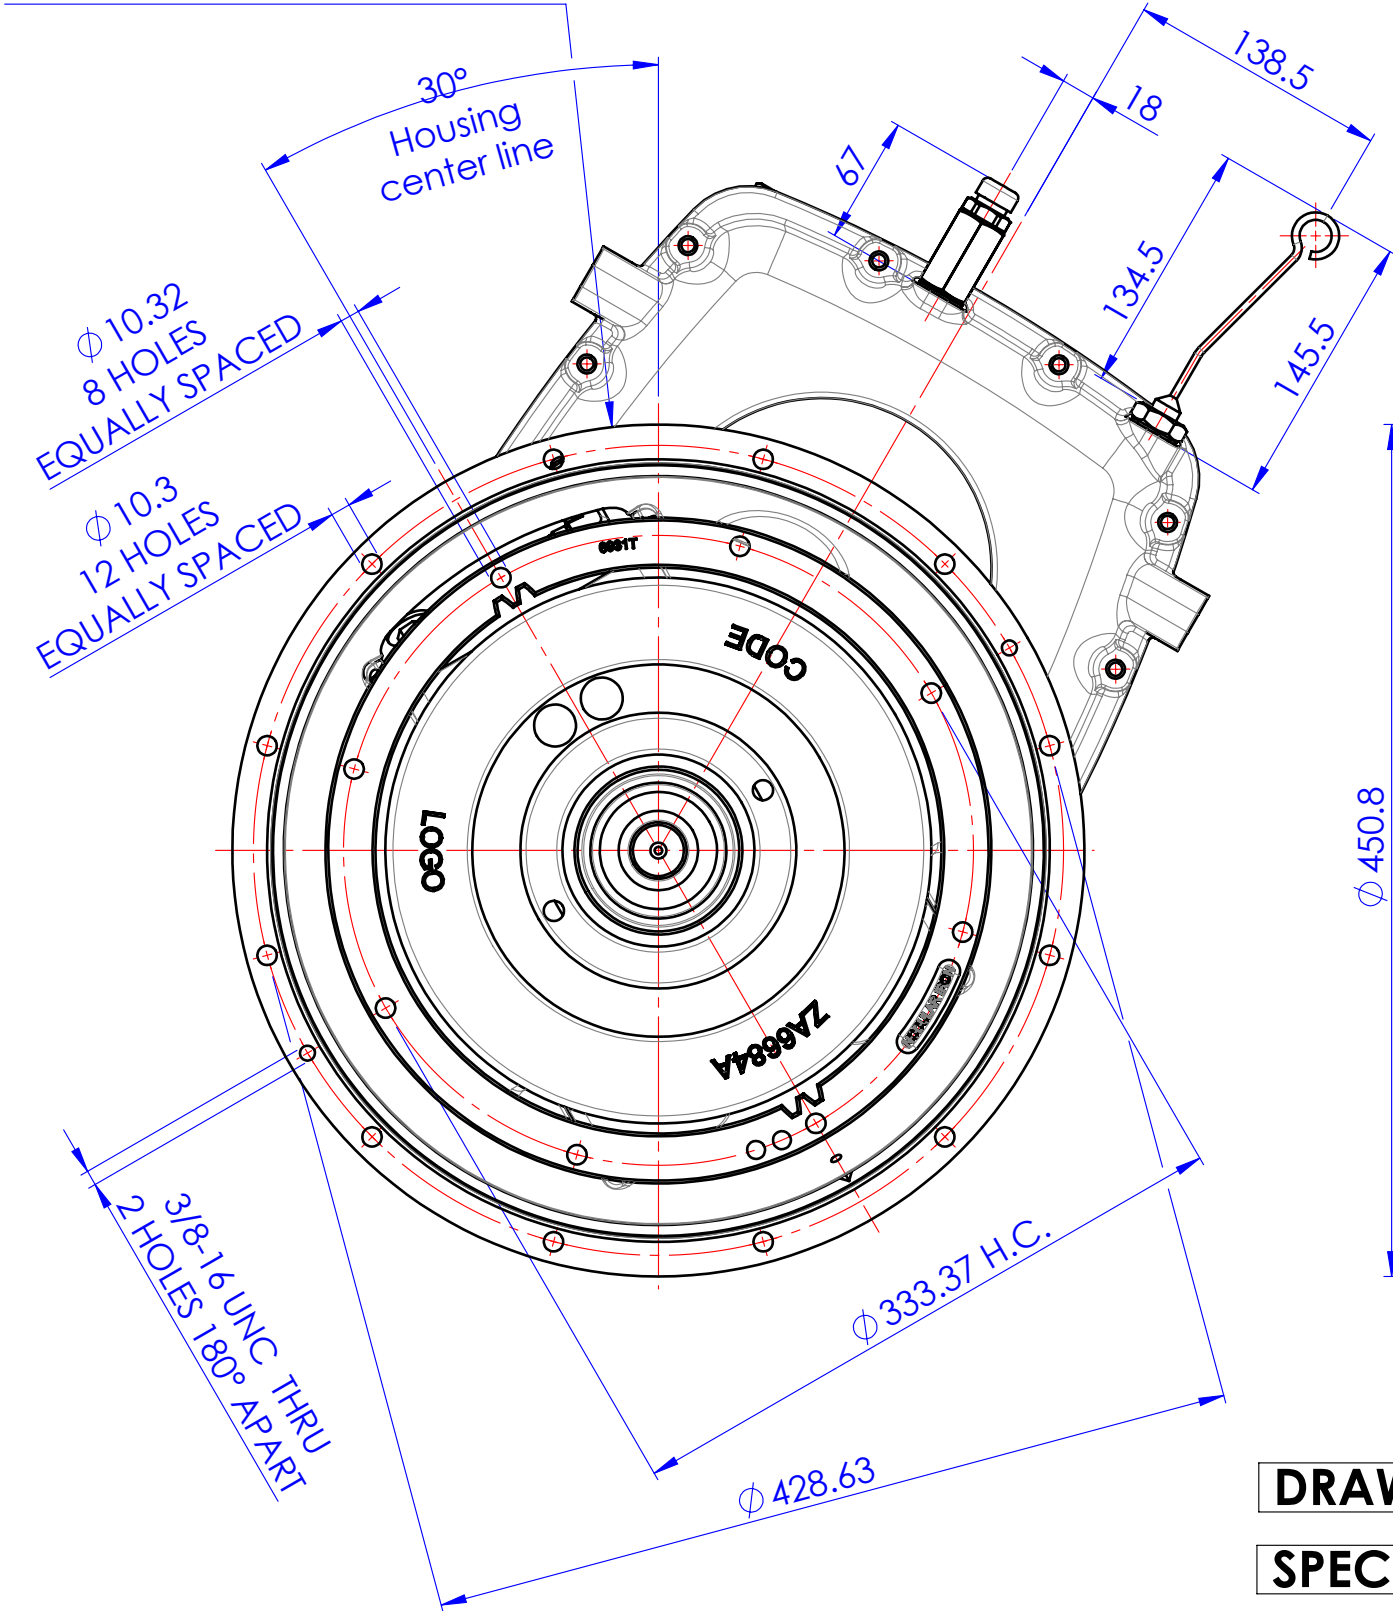

DRAWING AND 3D MODEL ARE VALID FOR ALL RATIOS

SPECIAL AM110 ROTATED 150°CW, BASIC ASSY GROUP FOR RATIO 0.67: IT1005185

PRIMO UTILIZZO MONTAGGIO/FIRST USE ASSEMBLY:
PRIMO IMPIEGO MODELLO/FIRST USE MODEL:
SIMILE A/SIMILAR TO:
METRIC
NOTICE! THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF
TWIN DISC, INCORPORATED
THIS NOTICE IS NOT INTENDED TO NULLIFY OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.

PESO WEIGHT: kg
WR: kg-m³
RUGOSITA' GEN. Ra (µm):
UNI ISO 2768 - c
DIMENSIONS WITHOUT TOLERANCES
GOLE DI SCARICO FILETTATURE
SECOND NORMATIVE
UNIT ISO 4755 - UNI 5709 - UNI5710
THREAD UNDERCUTS ACCORDING TO STANDARD ISO
FIRST ANGLE PROJECTION

MATERIALE / MATERIAL:
TRATT. TERMICO / HEAT TREAT:
DESCRIZIONE:
INGOMBRO
AM110 BOM 1029010K

TRATT. SUP. / SURFACE TREATMENT:
DESCRIPTION:
INSTALLATION
PUMP DRIVE AM110 BOM 1029010K

DATA / DATE:
10/23/2017
SCALA / SCALE:
1:4
DIS / DRAWN:
PR
VERIF. / CHECK:
GG
APPROVATO/APP:
DAJ

B ECNWF-4000054 08/03/2018
INDIC. MODIF. REV. MODIFICA / CHANGE NO. DATA / DATE
TWIN DISC.
RACINE, WI 53403 - USA
1029011J
CODICE / ITEM NO.:
FORMATO / SIZE: A2
FOGLIO / SHEET: 1 OF 1
INDIC. MODIF. REV. B
1025420W Rev. B