
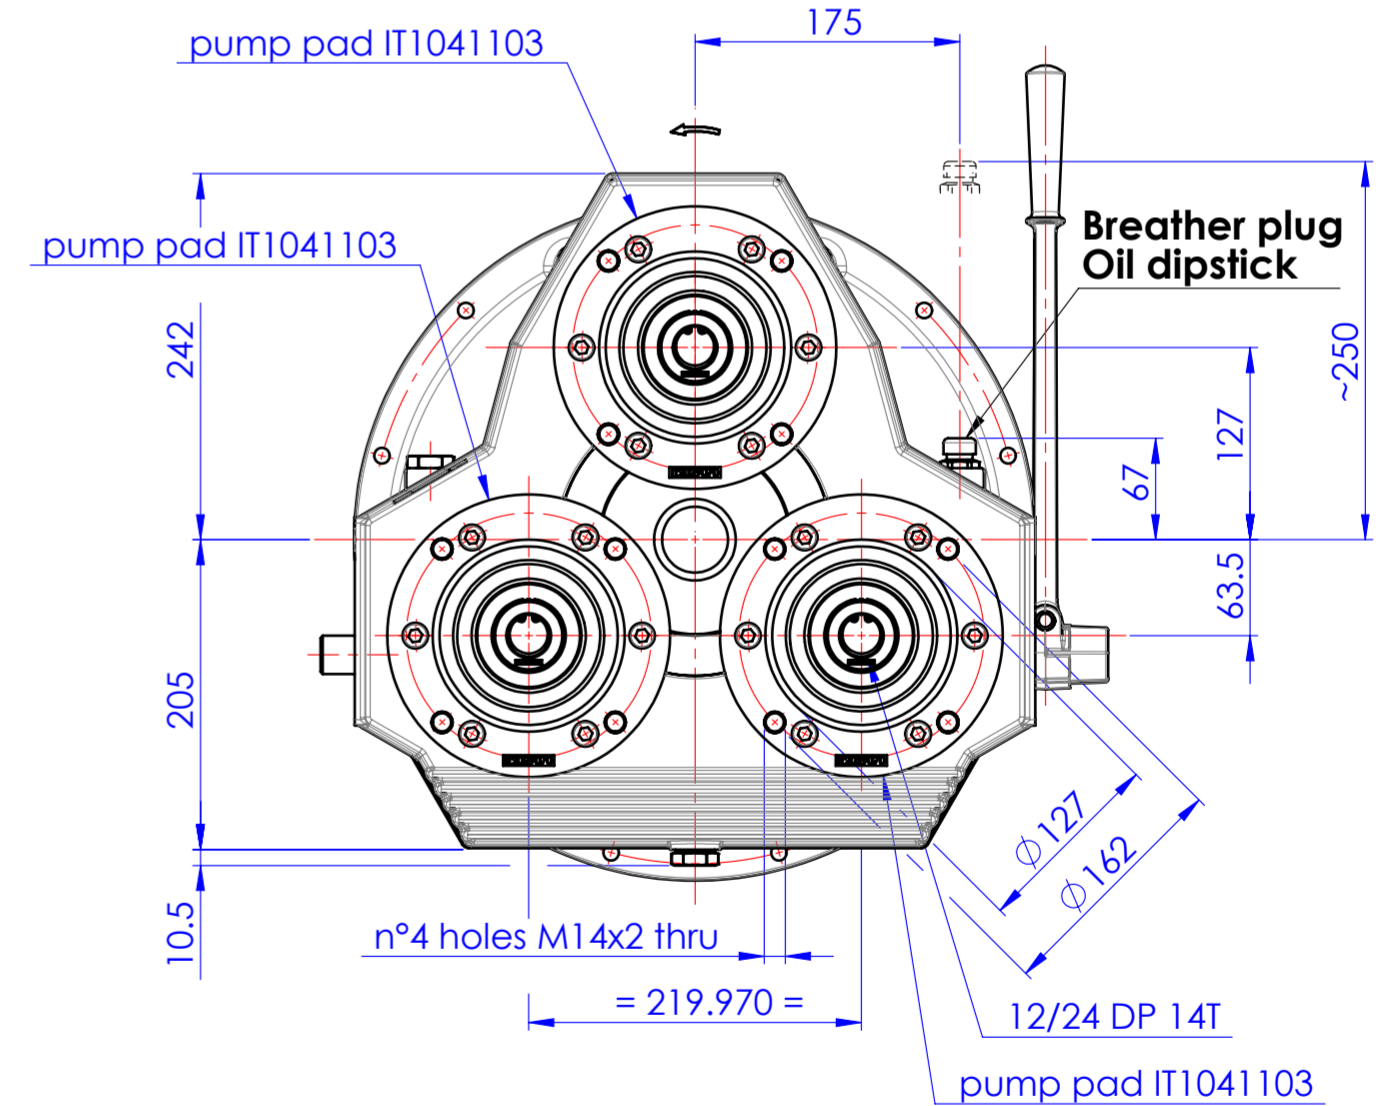
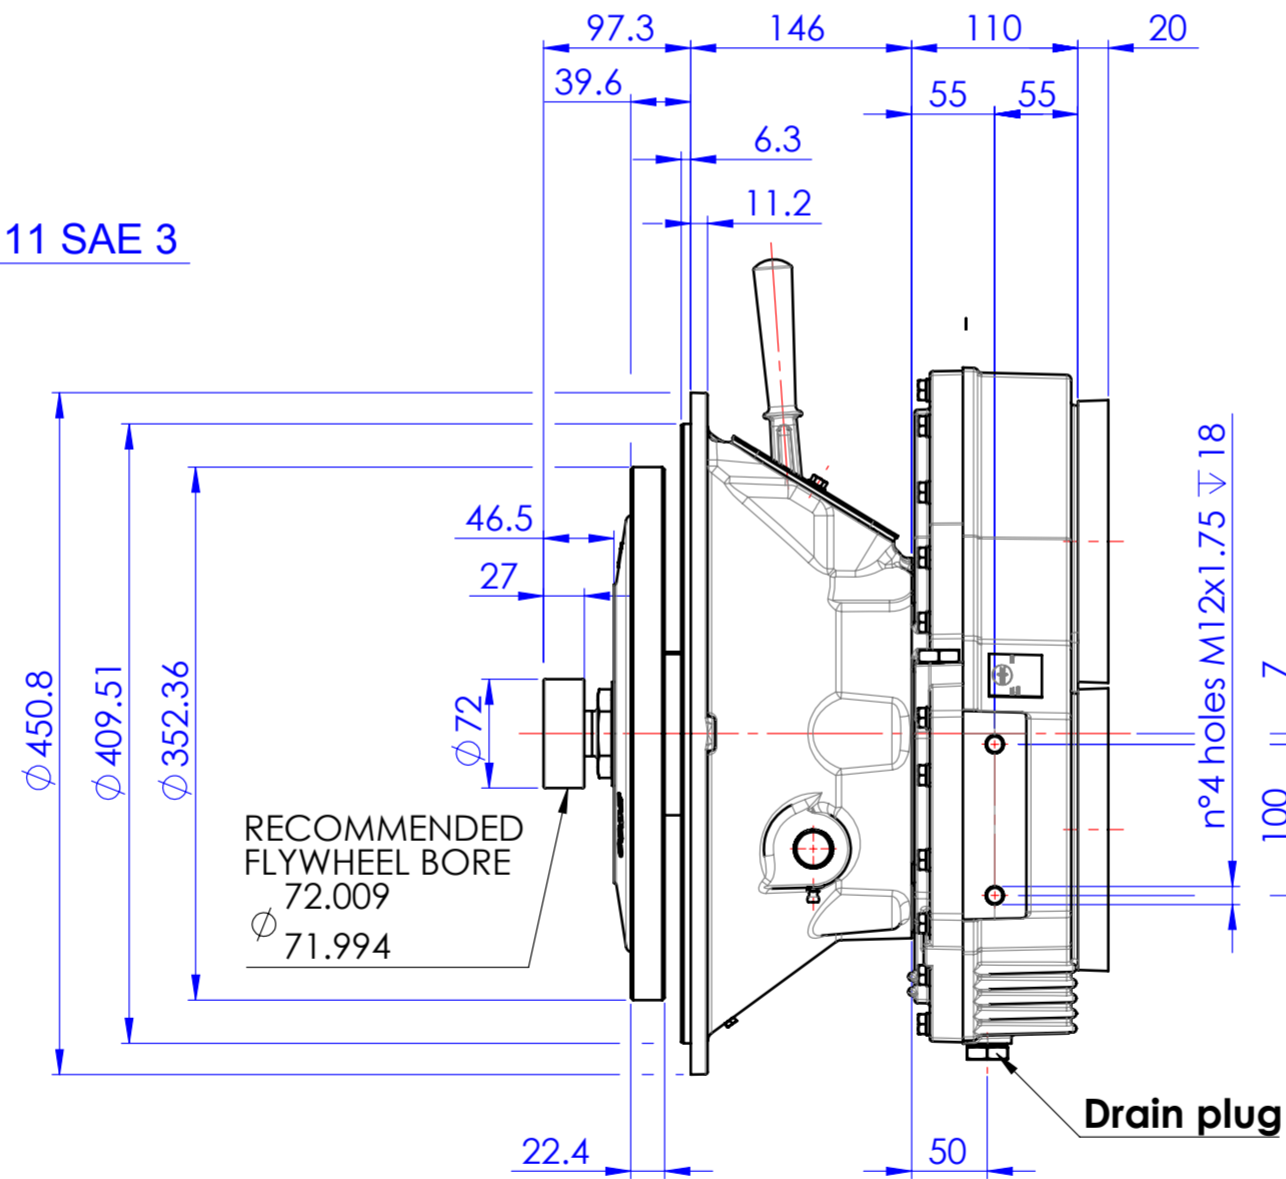
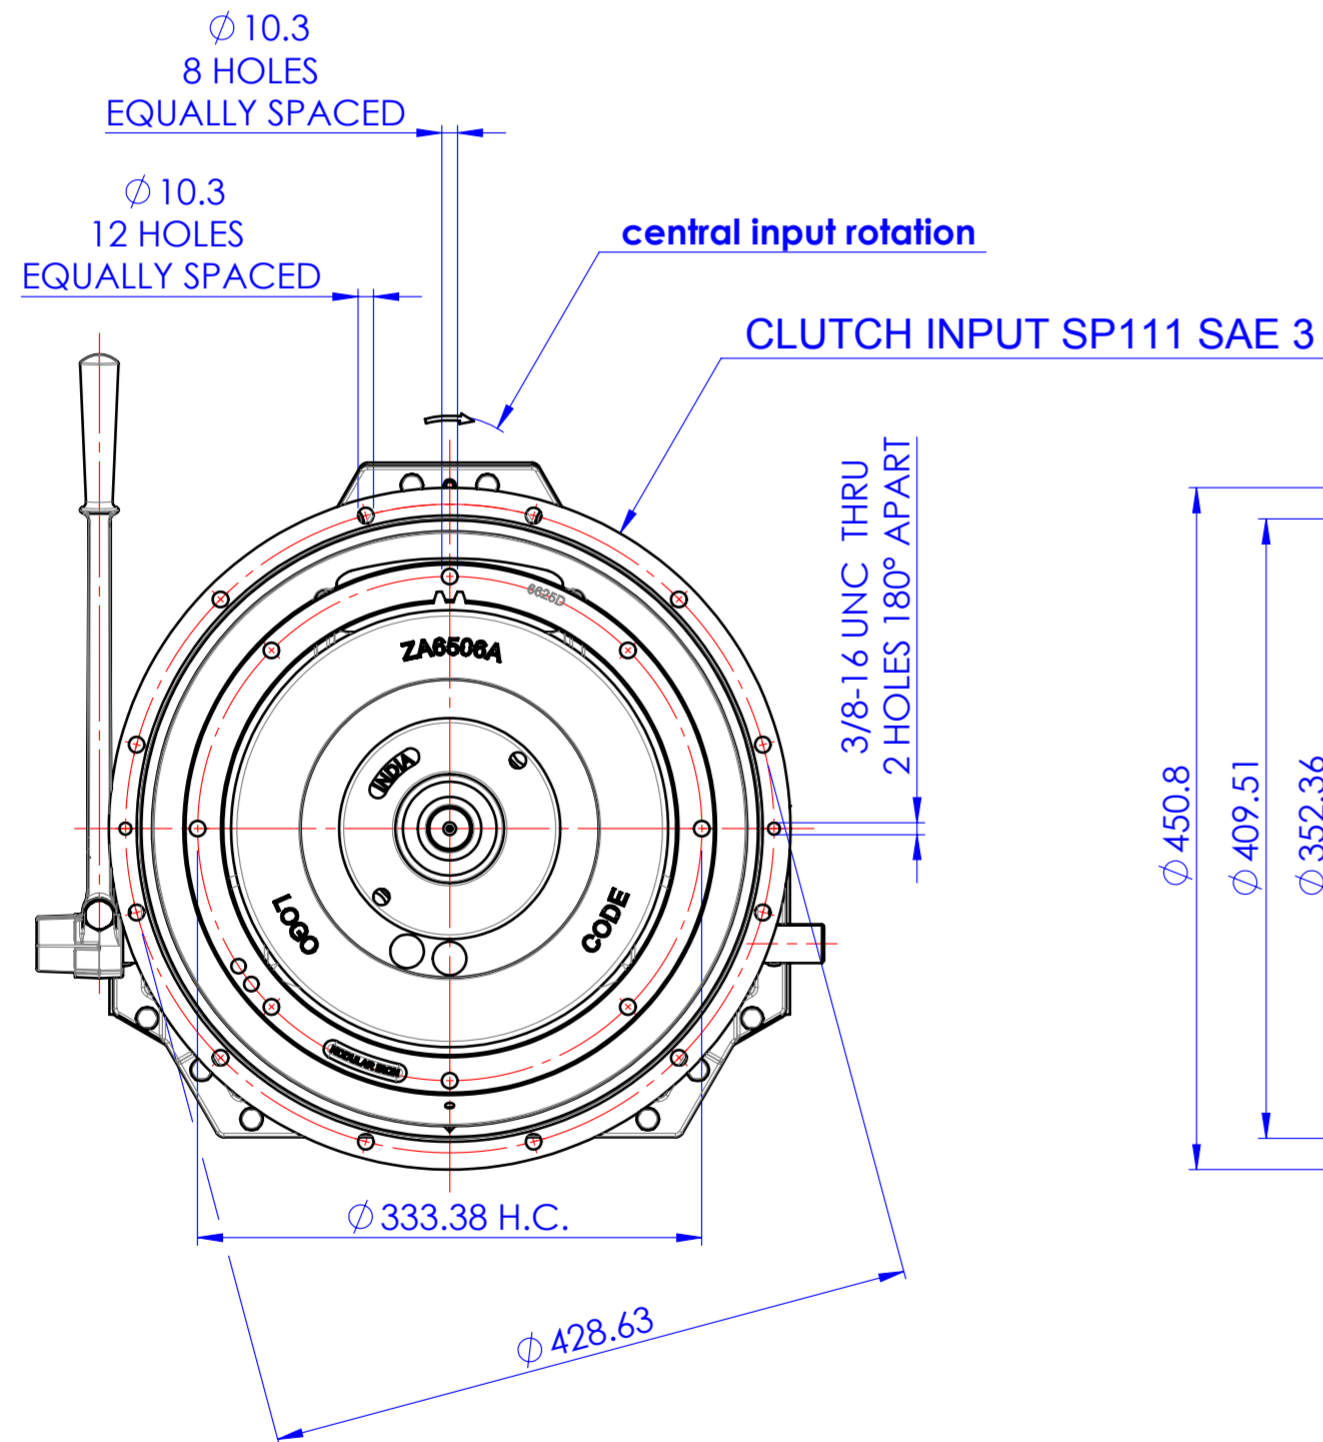
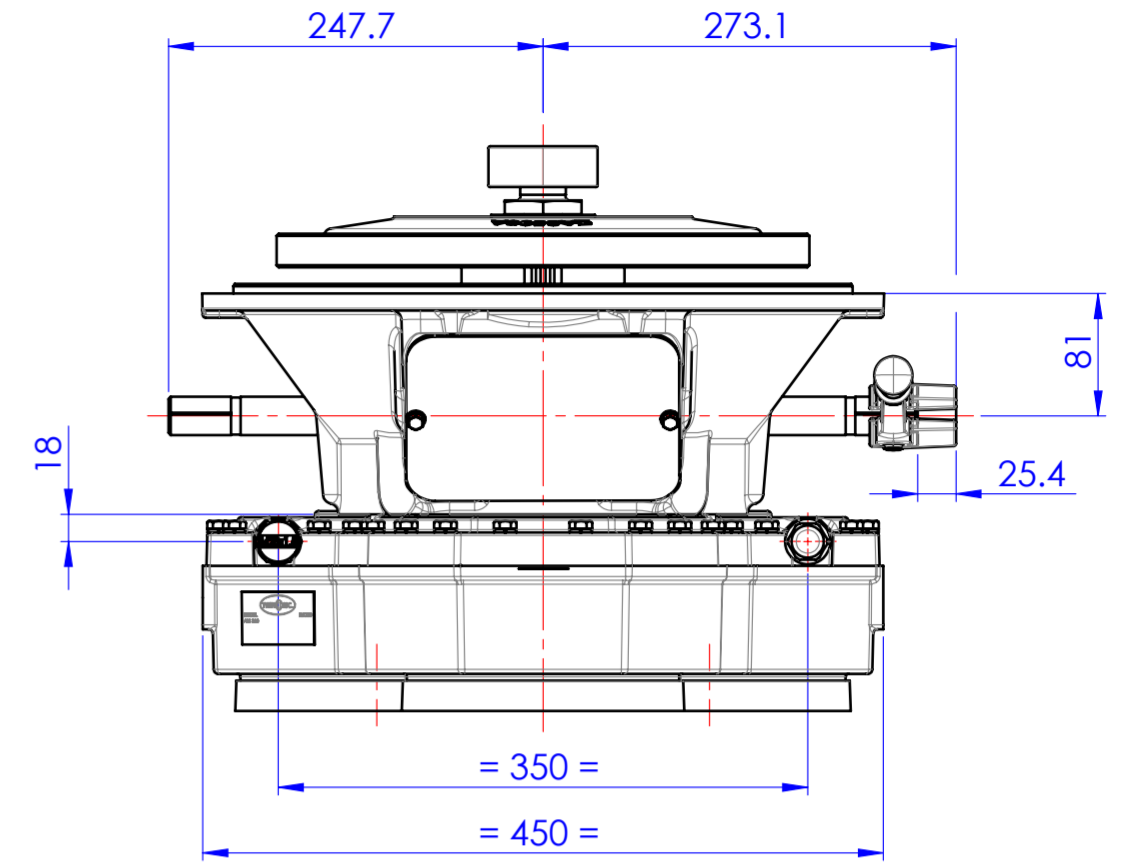


NOTE:
TO ENSURE NO PRELOAD ON SHIFTING MECHANISM,
HAND LEVER POSITION IN THE ENGAGED POSITION
SHOULD BE VERTICAL OR SLIGHTLY OVER CENTER
OF DISENGAGED POSITION

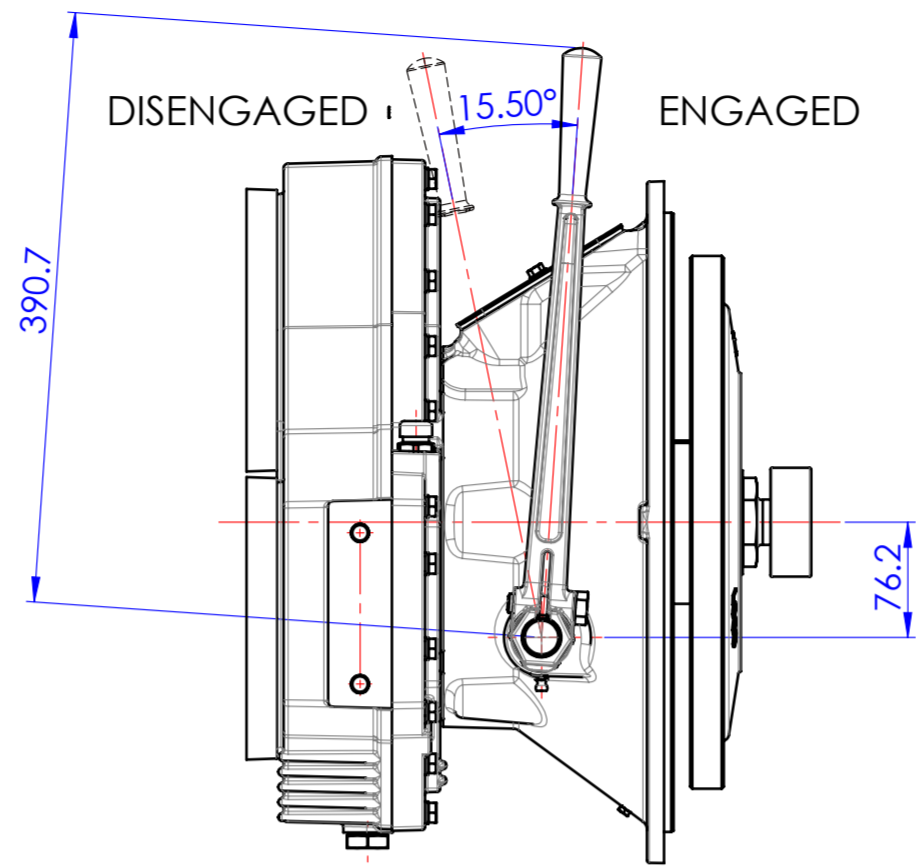

GENERAL NOTES:

- a.) REFER TO BILL OF MATERIAL LIST WHEN ORDERING PARTS.
- b.) REFER TO CARE & OPERATION MANUAL FOR ADDITIONAL INFO.

SPECIAL AM320 FOR RO/SP , BASIC ASSY GROUP RATIO 0.79 : ITB10220003

DRAWING AND 3D MODEL ARE VALID FOR ALL RATIOS

PRIMO UTILIZZO MONTAGGIO/FIRST USE ASSEMBLY: PRIMO IMPIEGO MODELLO/FIRST USE MODEL: SIMILE A/SIMILAR TO: METRIC		MODELLO / MADE FROM:	MATERIALE / MATERIAL:	DATA / DATE: 12/18/2017	INDIC. MODIF. / REV.:	NDWF-4000329	01/02/2018
NOTICE! THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF TWIN DISC, INCORPORATED. THIS NOTICE IS NOT INTENDED TO NULLIFY OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.		PESO WEIGHT: WR ² : TOLL. GEN. DILAVORAZIONE H13 FORO - H13 ALBERO 14 DIMENSIONI LINEARI 15' fino Ø200 10' fino Ø500	TRATT. TERMICO / HEAT TREAT:	SCALA / SCALE: 1:5	MODIFICA / CHANGE NO.	TWIN(DISC) DECIMA - ITALY	
THIRD ANGLE PROJECTION		DESCRIZIONE: INGOMBRO AM320 BOM 1029020D	TRATT. SUP. / SURFACE TREATMENT:	DIS / DRAWN: PR	REV.:	1029021C	
		DESCRIPTION: INSTALLATION PUMP DRIVE AM320 BOM 1029020D		VERIF. / CHECK: GG	APPROVATO/APP. DAJ	FORMATO / SIZE: A2	FOGLIO / SHEET: 1 OF 1

D

C

B

A