




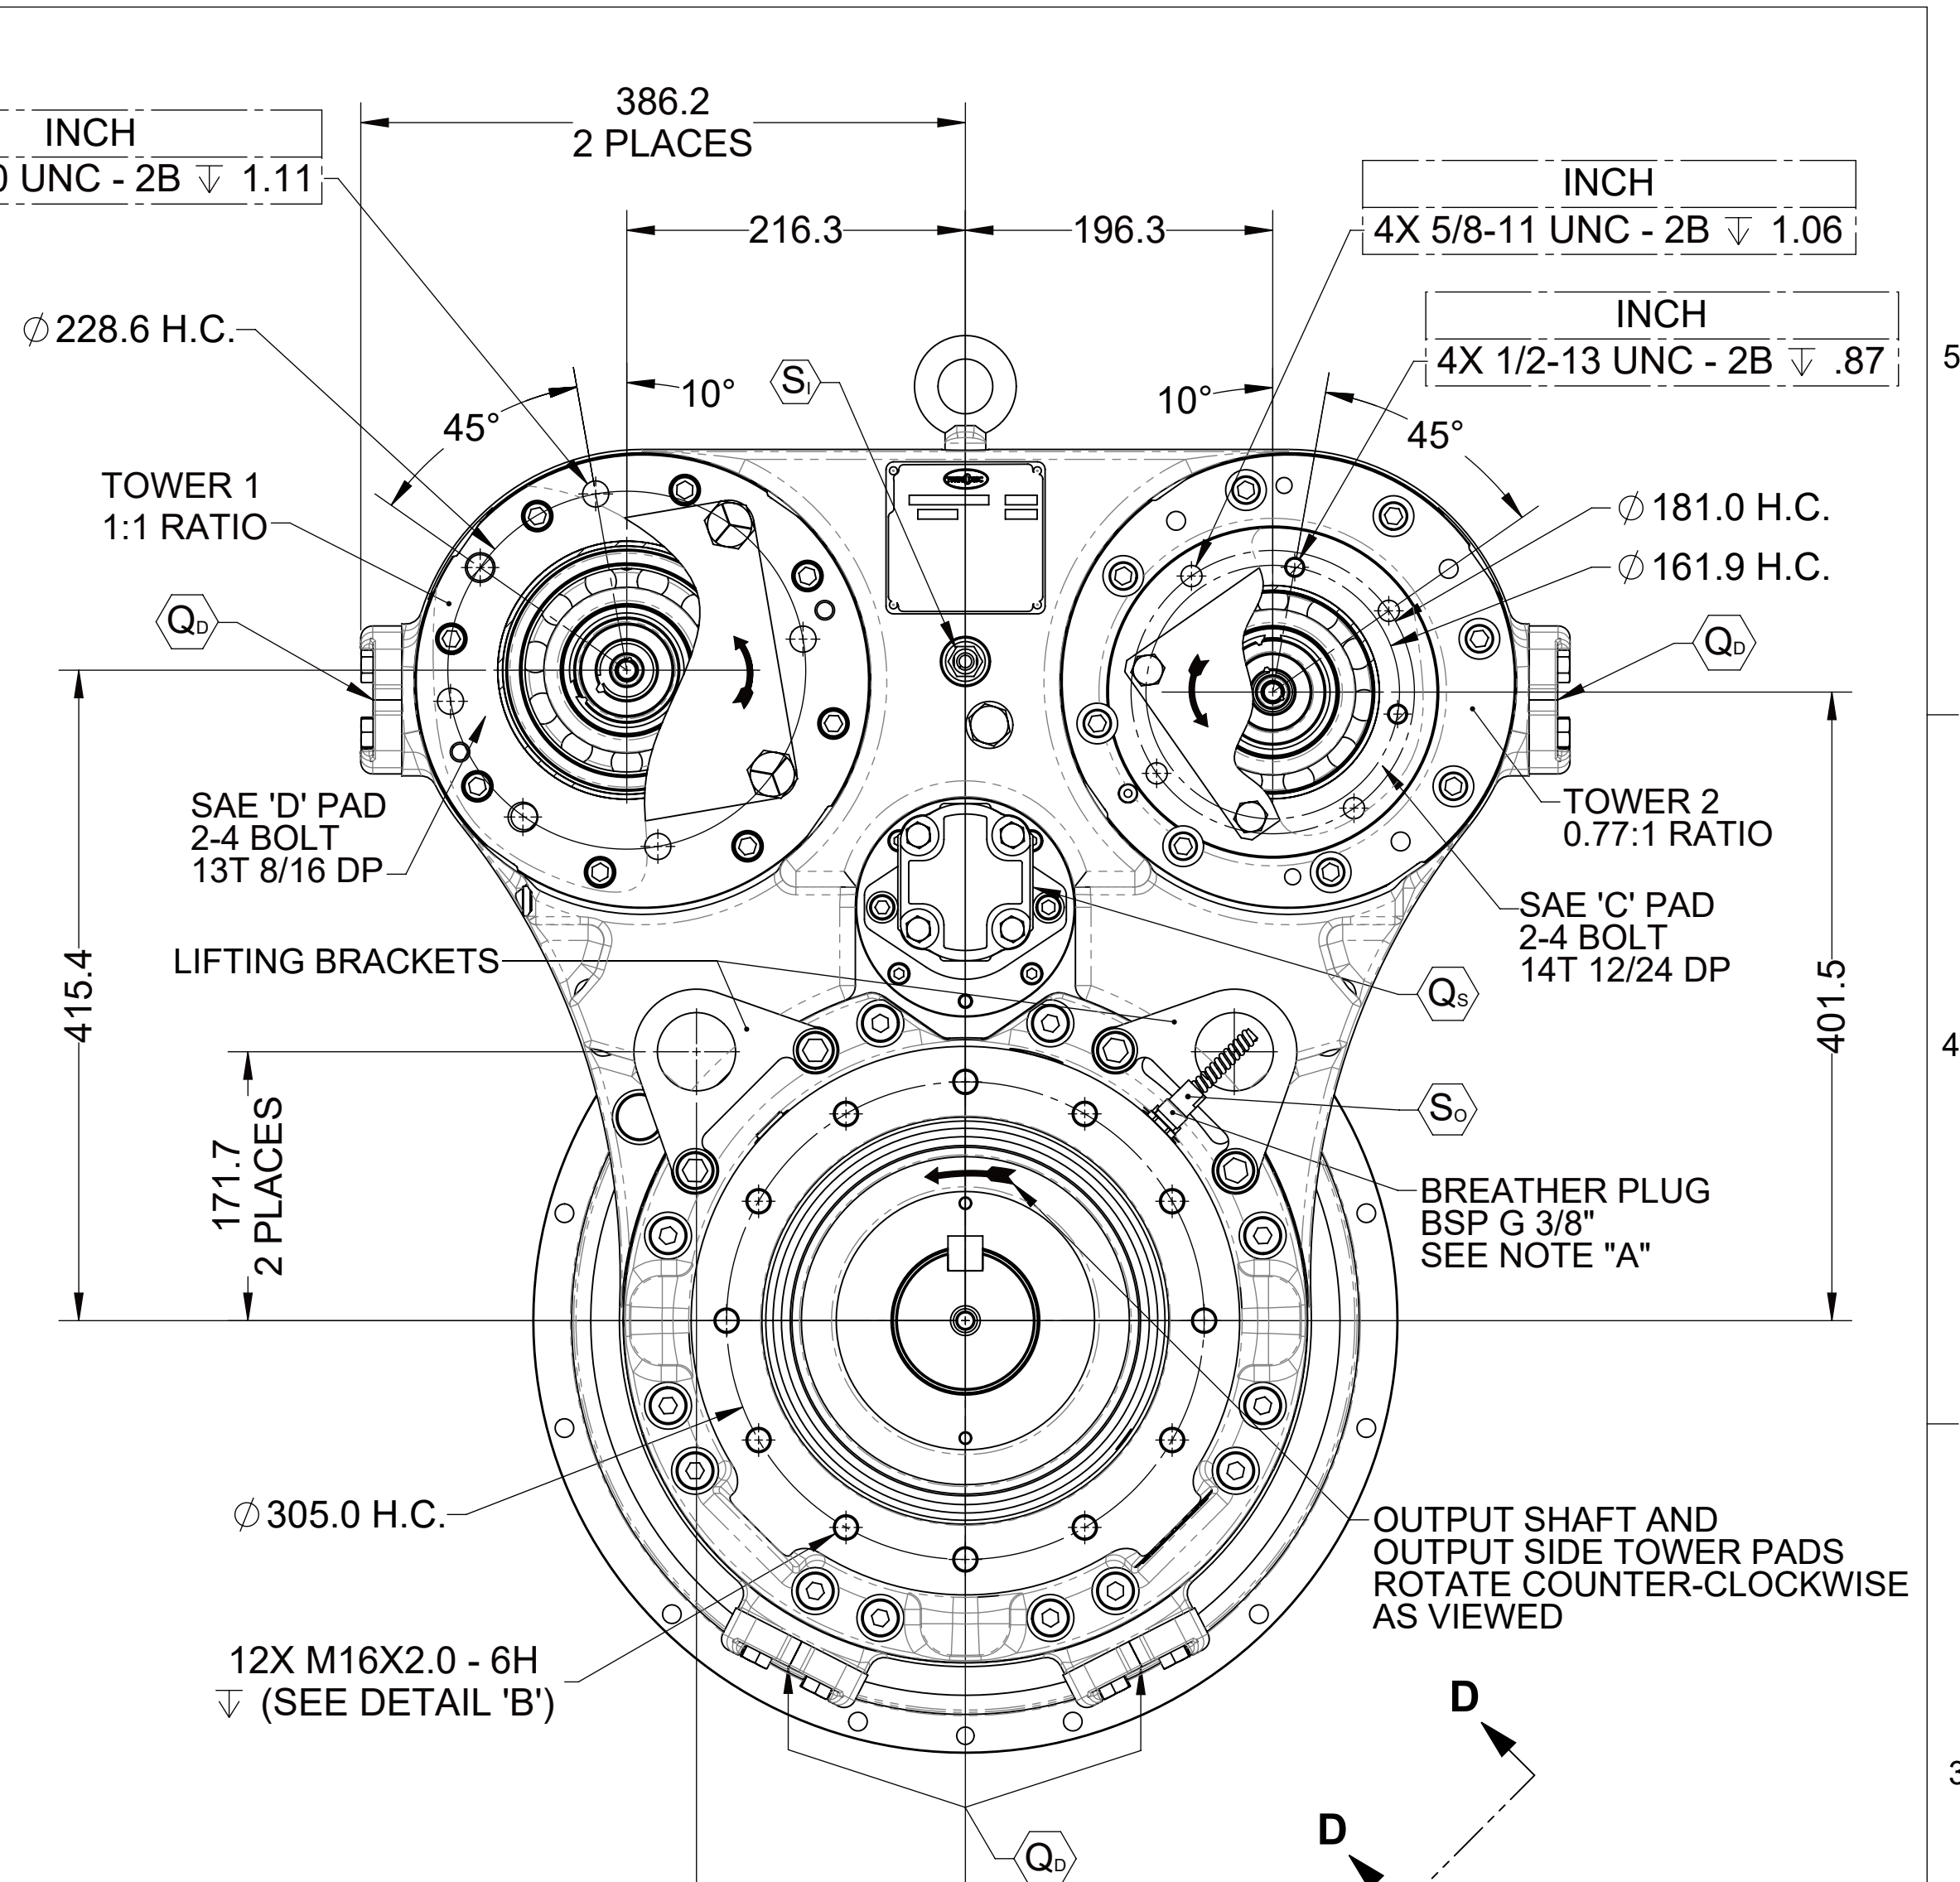


- NOTES:**
- A. BREATHER MUST BE INSTALLED AT THE HIGHEST POINT BETWEEN TWO PORTS
 - B. ALL POINTS AVAILABLE FOR TESTING ARE CODED 
 - C. ALL PLUGS AND TEST PORTS  TO BE TORQUED PER S574 O-RING PORT SPECIFICATIONS
 - D. REFER TO MANUAL FOR RECOMMENDED OIL, CHECKING, AND MAINTENANCE PROCEDURES

24.0
EFF. DEPTH

20.1
EFF. THD.

DETAIL A
SCALE 1 : 2

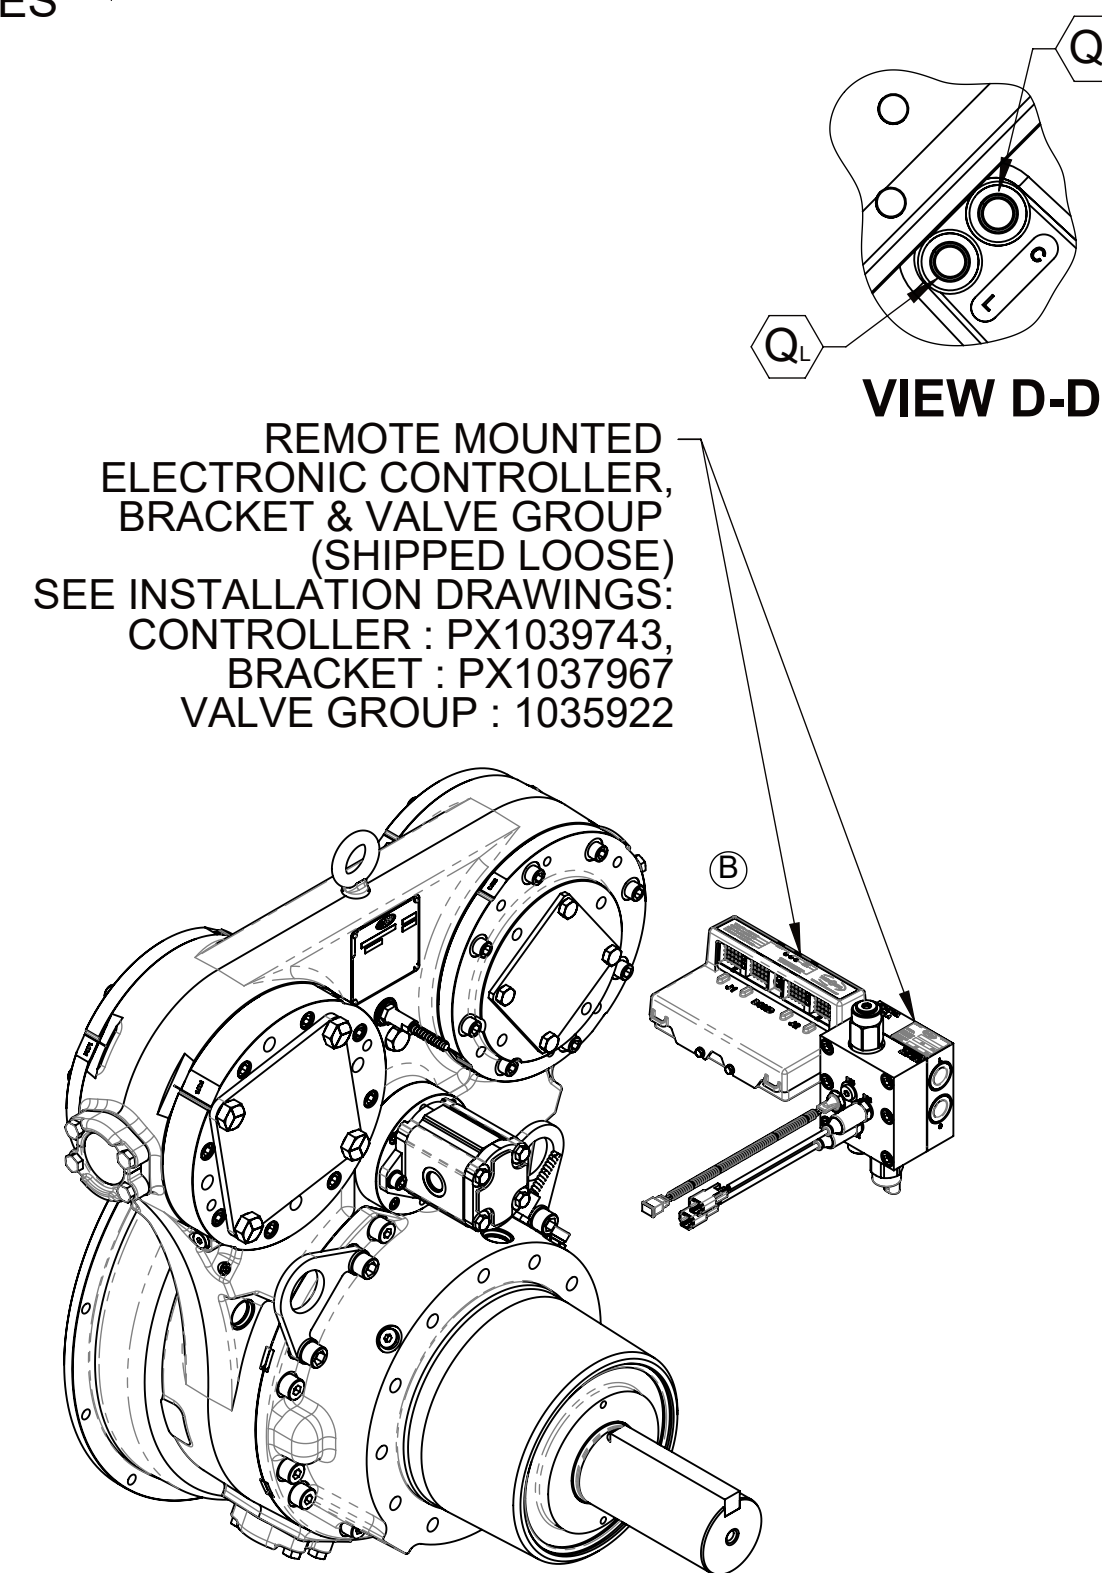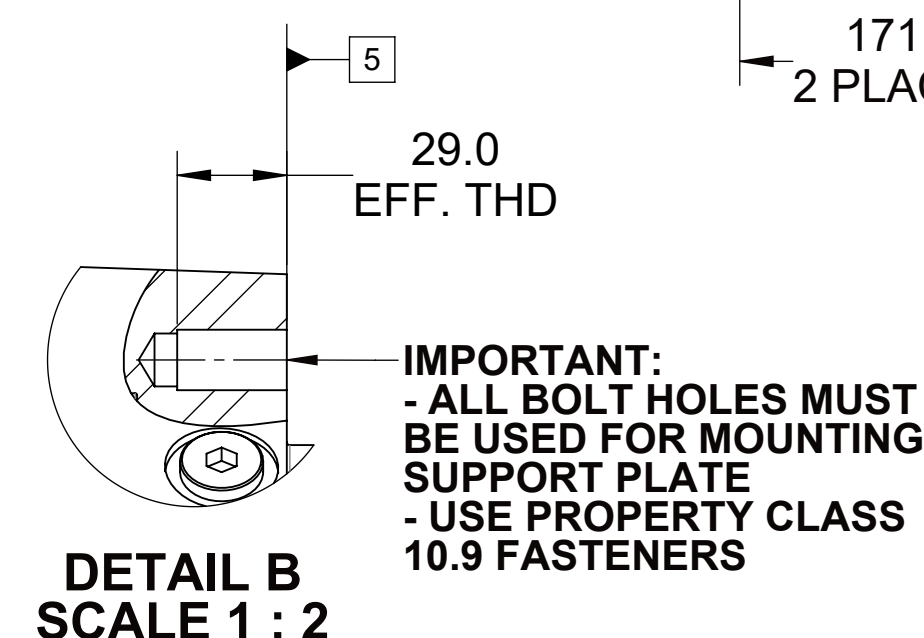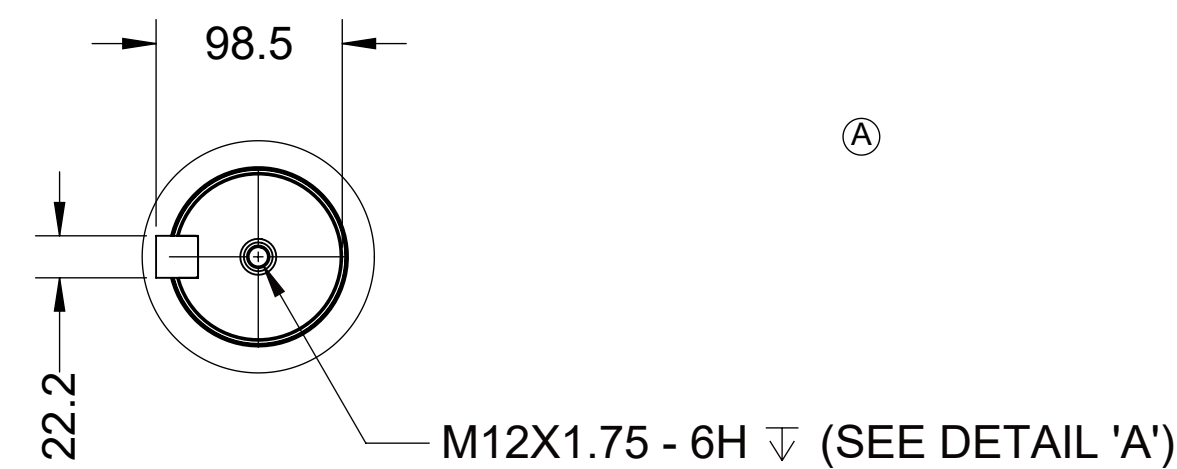

FIRST USE ASSEMBLY: S1041026	WEIGHT:	539 _{kg}		THIRD ANGLE PROJECTION	MATERIAL:	DATE: 12/11/2017	 RACINE, WI 53403 - USA		
FIRST USE MODEL: HP500	WR:	kg-mt			HEAT TREAT:	SCALE: 1:4			
SIMILAR TO:					DESCRIPTION:	DRAWN BY: JMB	1029980A		
NOTICE! THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT THE INTEREST OF TWIN DISC . DISCOUNTING IS ILLEGAL. THIS DOCUMENT NOT INTENDED TO INFLUENCE OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.				UNLESS OTHERWISE SPECIFIED MACHINED DIMENSIONS X +0.75 X X +0.25 X X +0.15 ALL ANGULAR TOLERANCES ±1° GEOMETRIC TOLERANCING PER ASME Y14.5M 1994		CHECKED BY: JEL			
					INSTALLATION HPTO, HP500	APPROVED BY: GAM	DWG SIZE: A1	SHEET: 1 OF 1	REV: B