


NOTE:
 TO INSURE NO PRELOAD ON SHIFTING MECHANISM, HAND LEVER POSITION SHOULD BE SLIGHTLY PAST VERTICAL POSITION OR TOWARDS ENGINE.

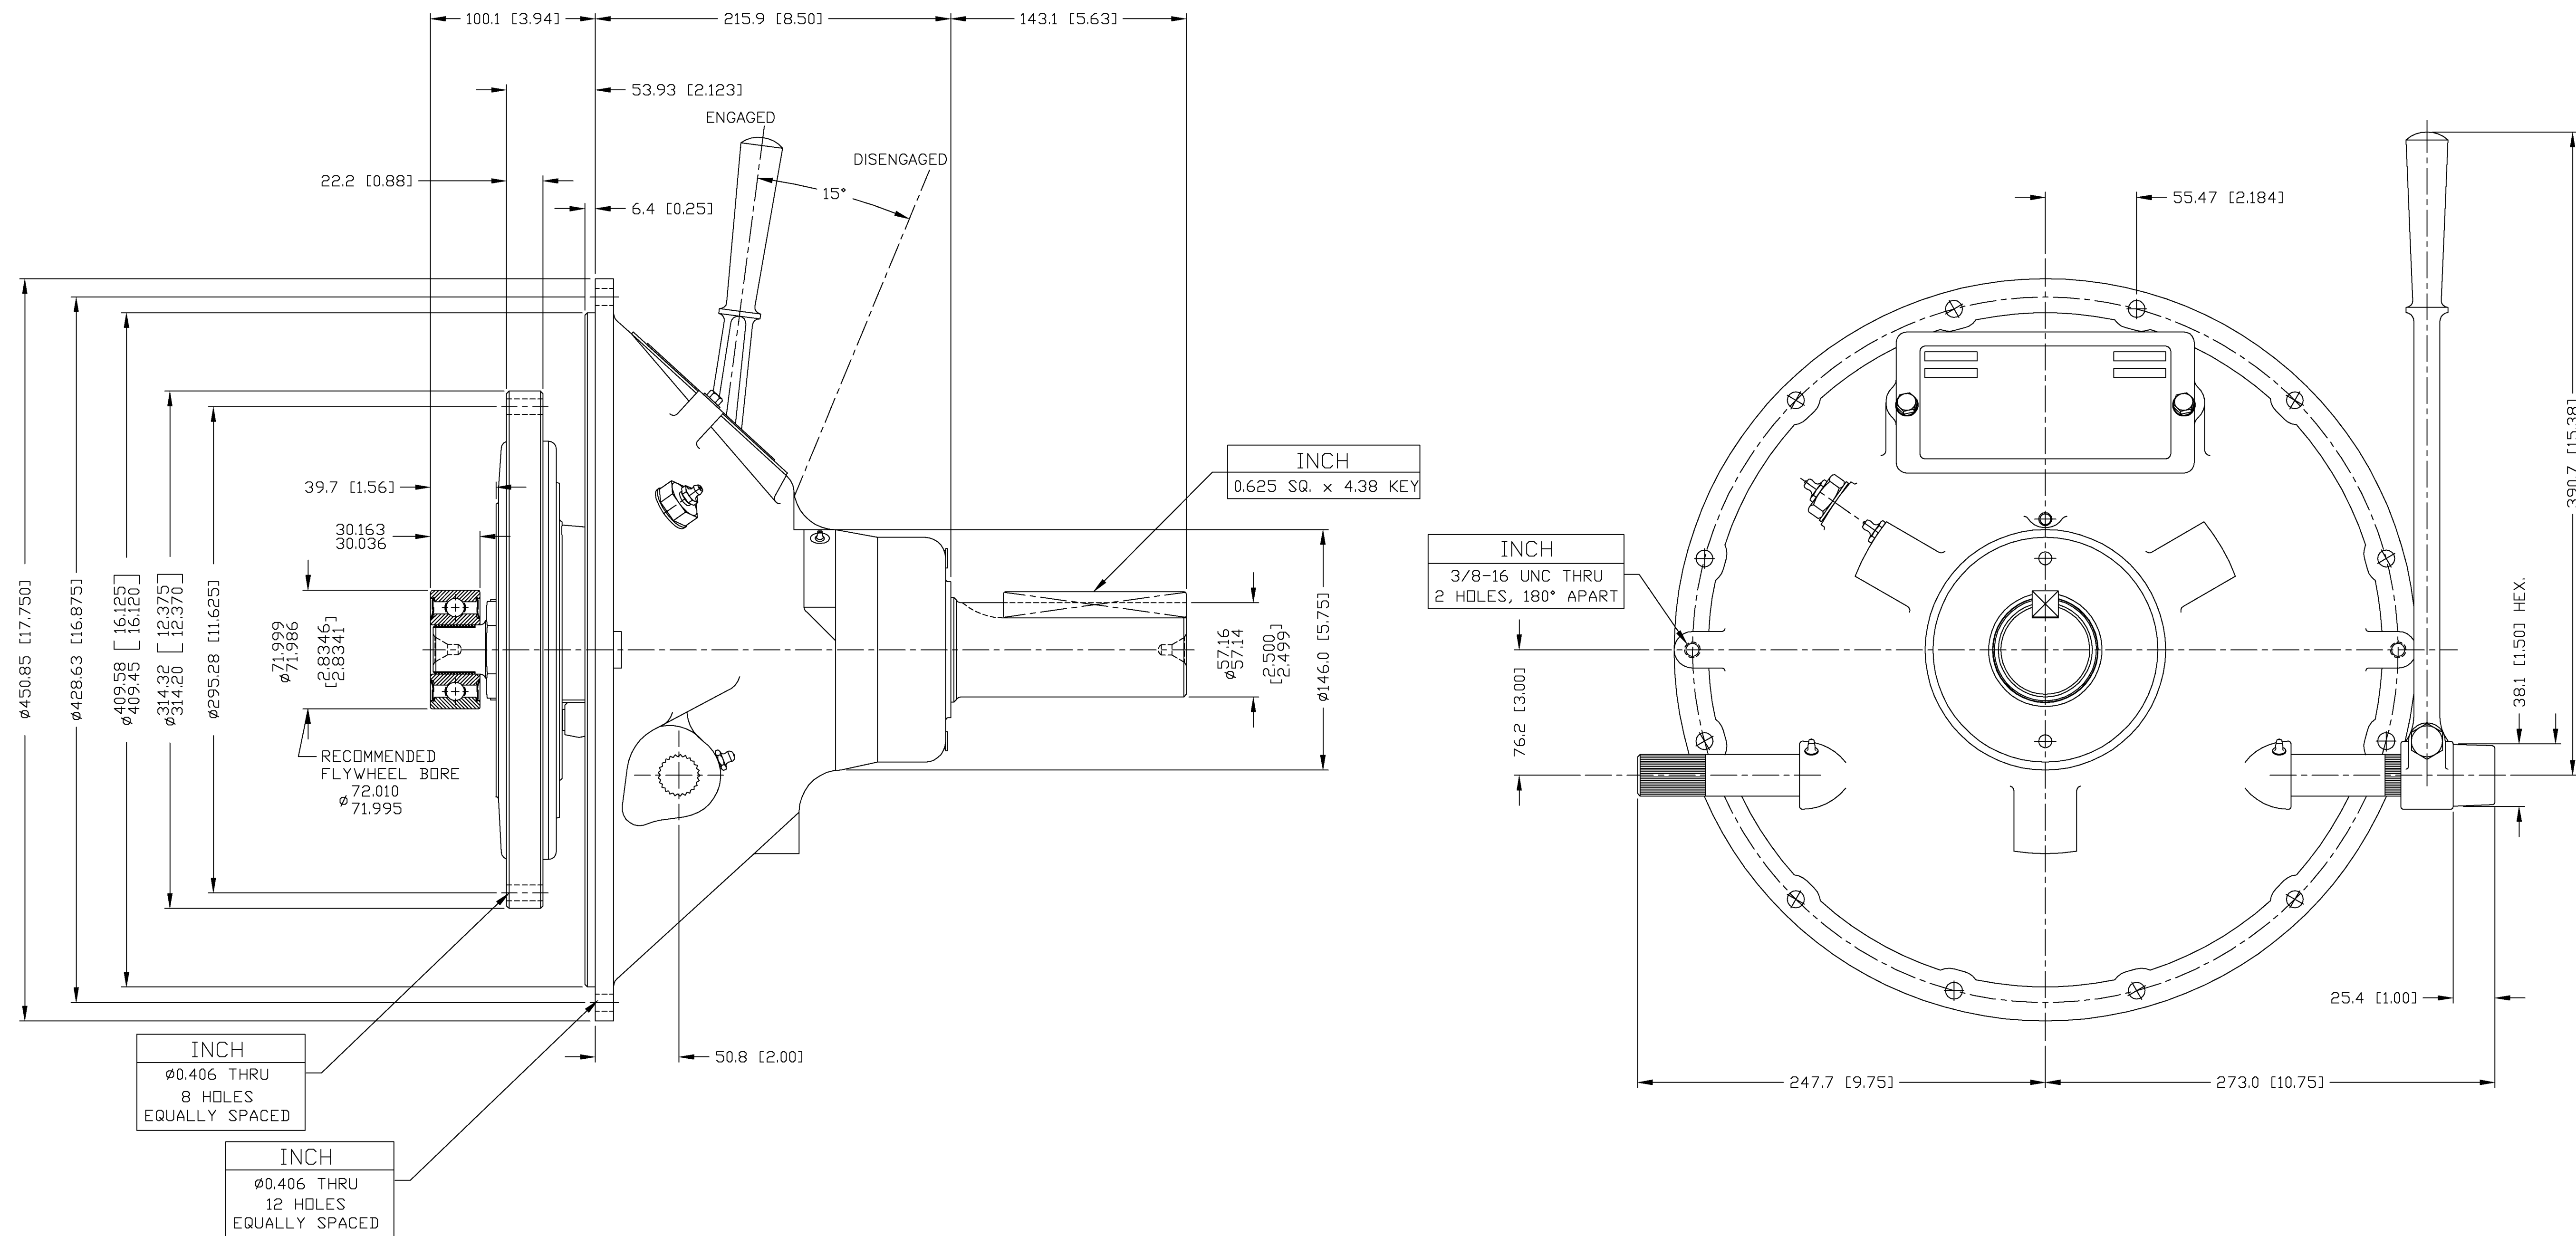

GENERAL NOTES:
 a.) REFER TO BILL OF MATERIAL WHEN ORDERING PARTS.
 b.) REFER TO CARE & OPERATION MANUAL FOR ADDITIONAL INFO.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS
 MACHINED DIMENSIONS
 X ±0.75
 XX ±0.25
 XXX ±0.13
 ALL ANGULAR TOLERANCES ±1°
 GEOMETRIC TOLERANCING PER ASME Y14.5M 1994

WEIGHT
 kg

WRP
 N.A.

FIRST USE
 ASSY. CX110P303
 MODEL C110HP3
 NOTICE: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF TWIN DISC, INCORPORATED
 THIS NOTICE IS NOT INTENDED TO WAIVE OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.

METRIC
 THIRD ANGLE PROJECTION

MATERIAL

HEAT TREAT

SIMILAR TO
 X8249

NAME
 C110HP3
 POWER TAKE OFF

DATE
 08-06-02
 SCALE
 1:50 = 1
 DRN:
 DJH
 CHK:
 JTS
 APPD:
 JTS

TWIN DISC
 INCORPORATED
 RACINE, WI 53403 - USA
CX110P303
 DWG SIZE: A1 SH: 2 OF 2 REV: C