



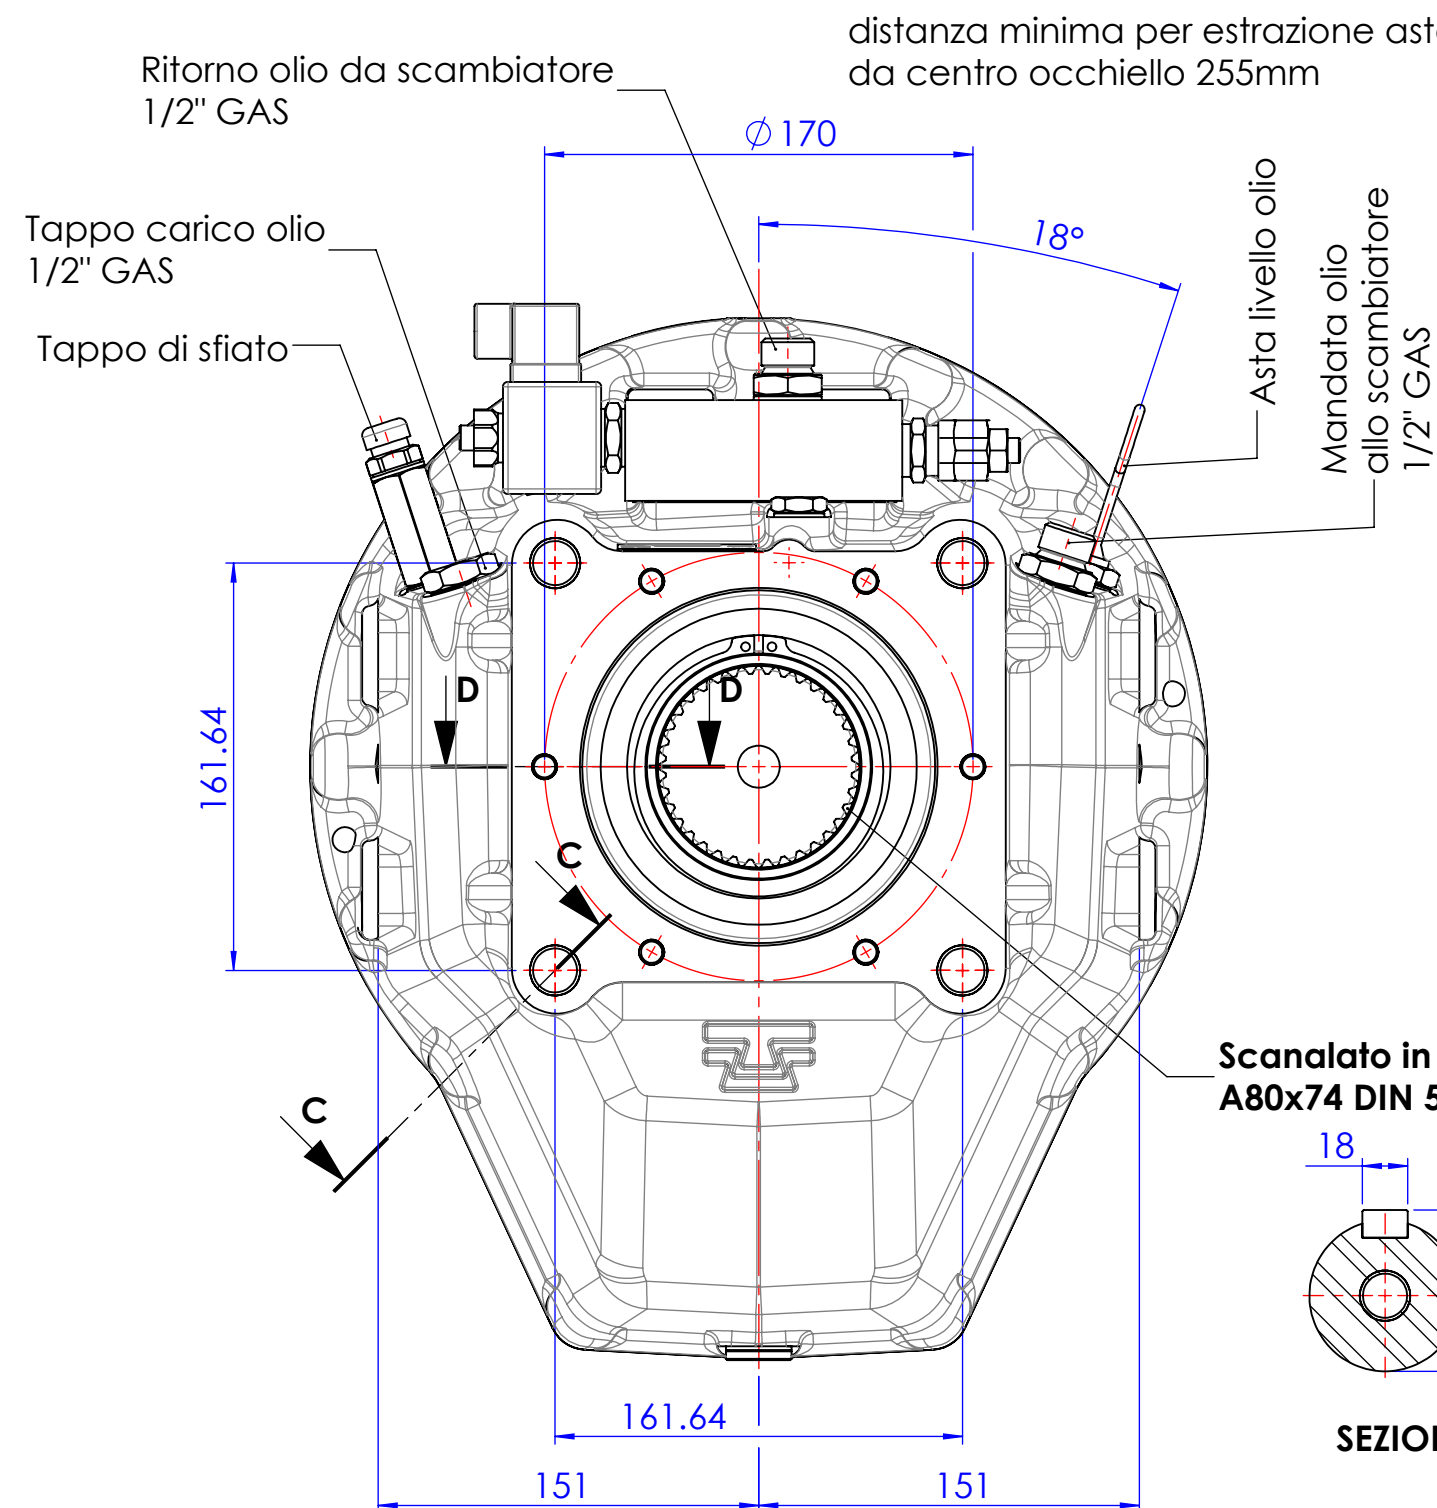


distanza minima per estrazione asta livello olio:
da centro occhiello 255mm



Scanalato in uscita
A80x74 DIN 5482 Z=36

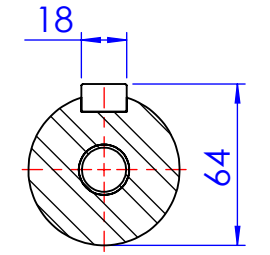


SEZIONE A-A

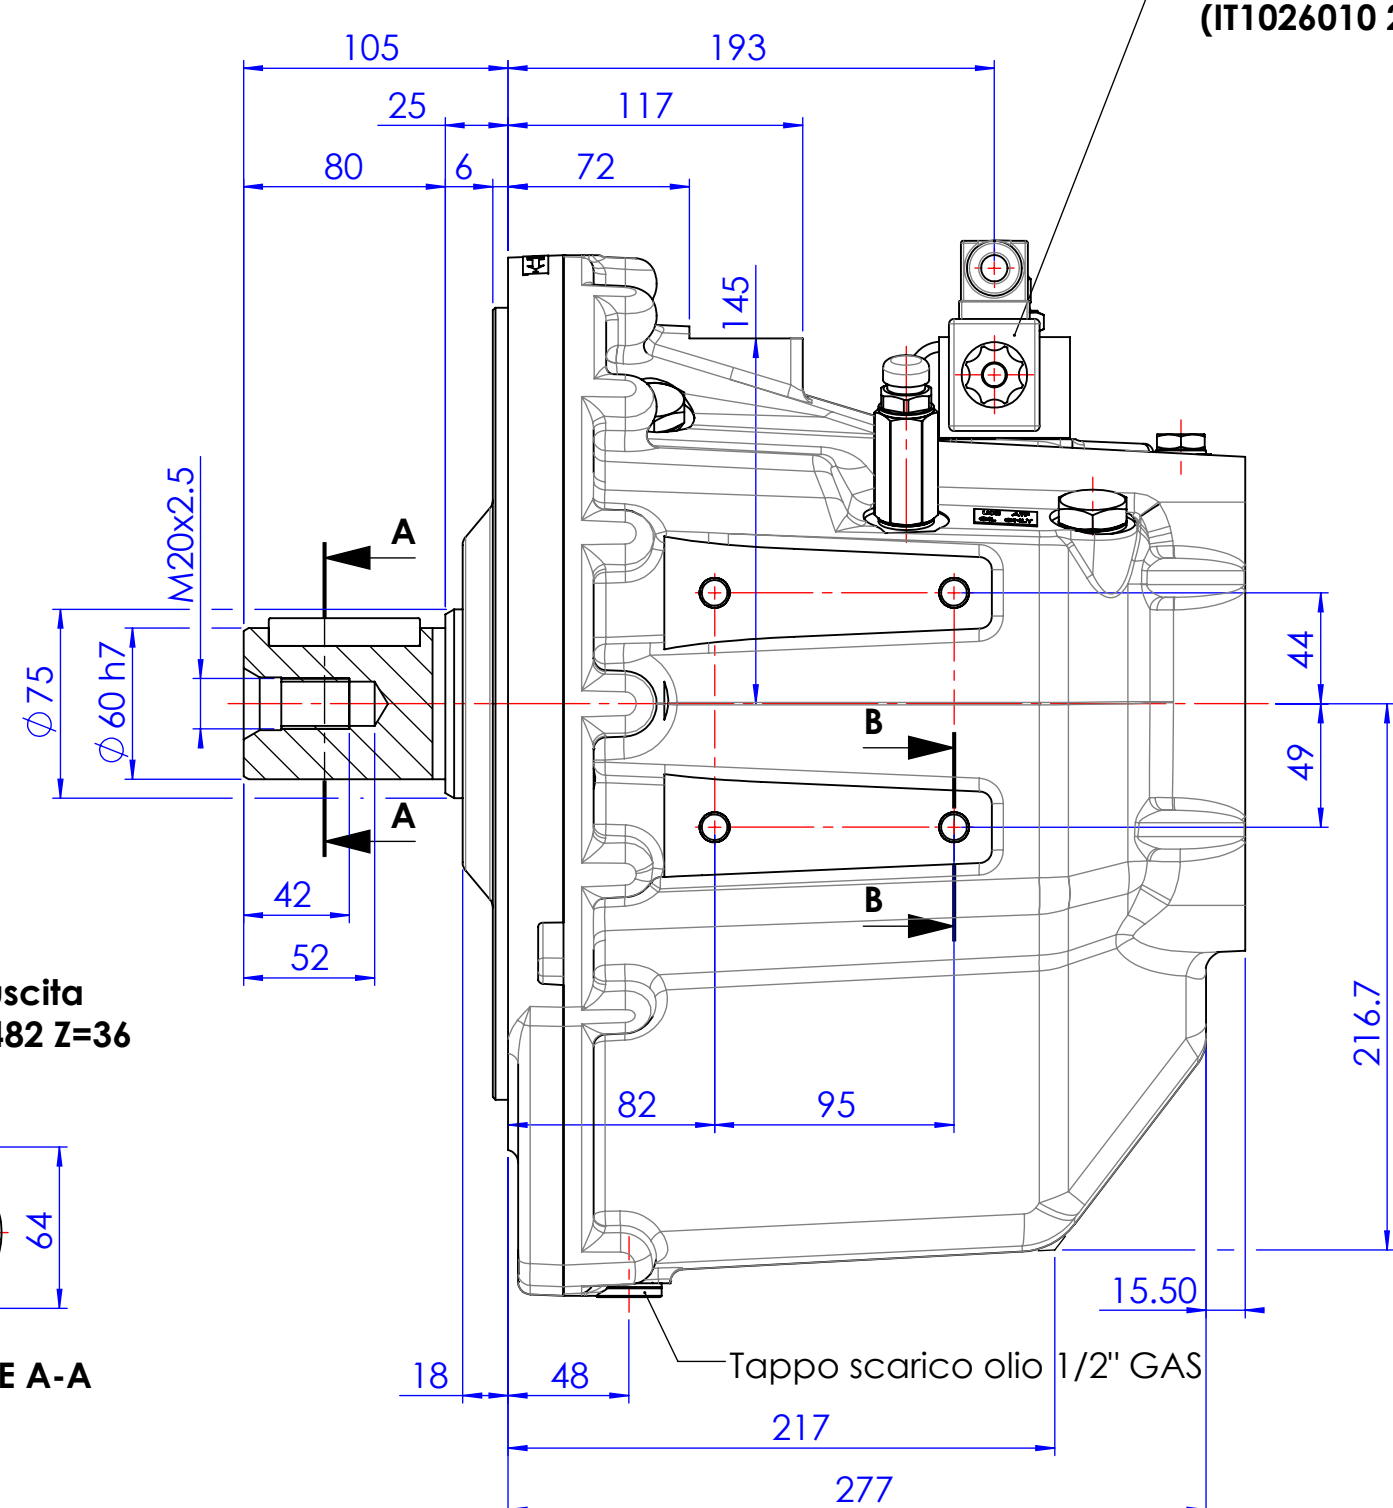


Selettore elettrico a richiesta
(IT1026010 24V) (IT1026011 12V)

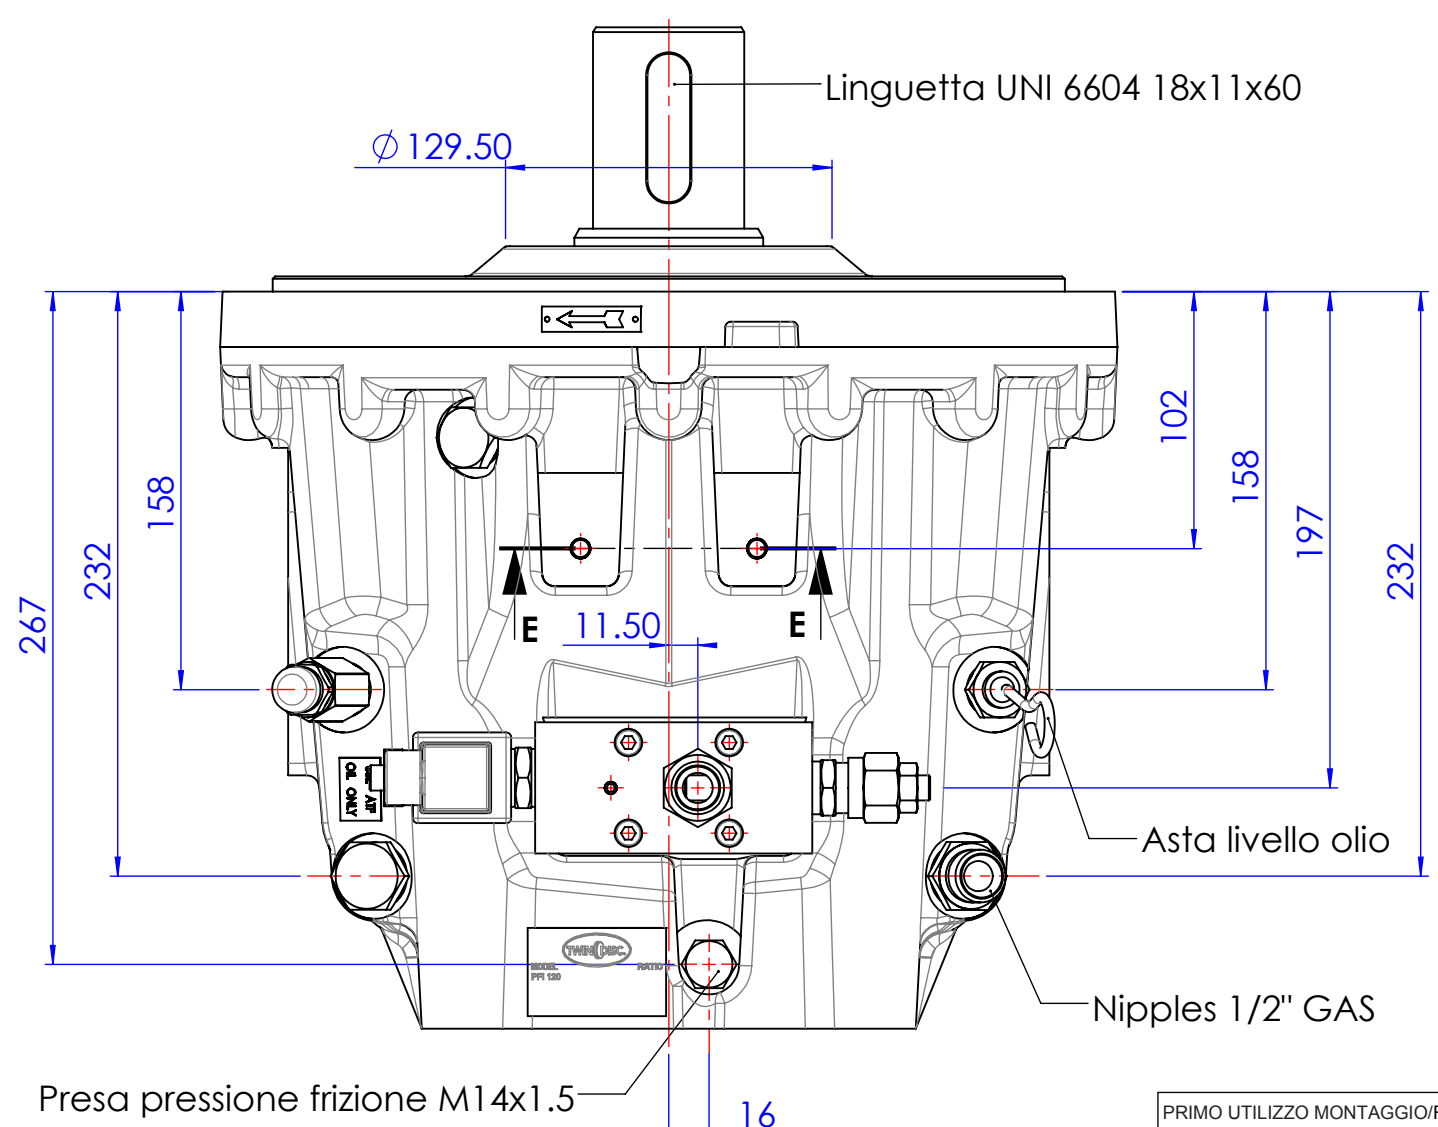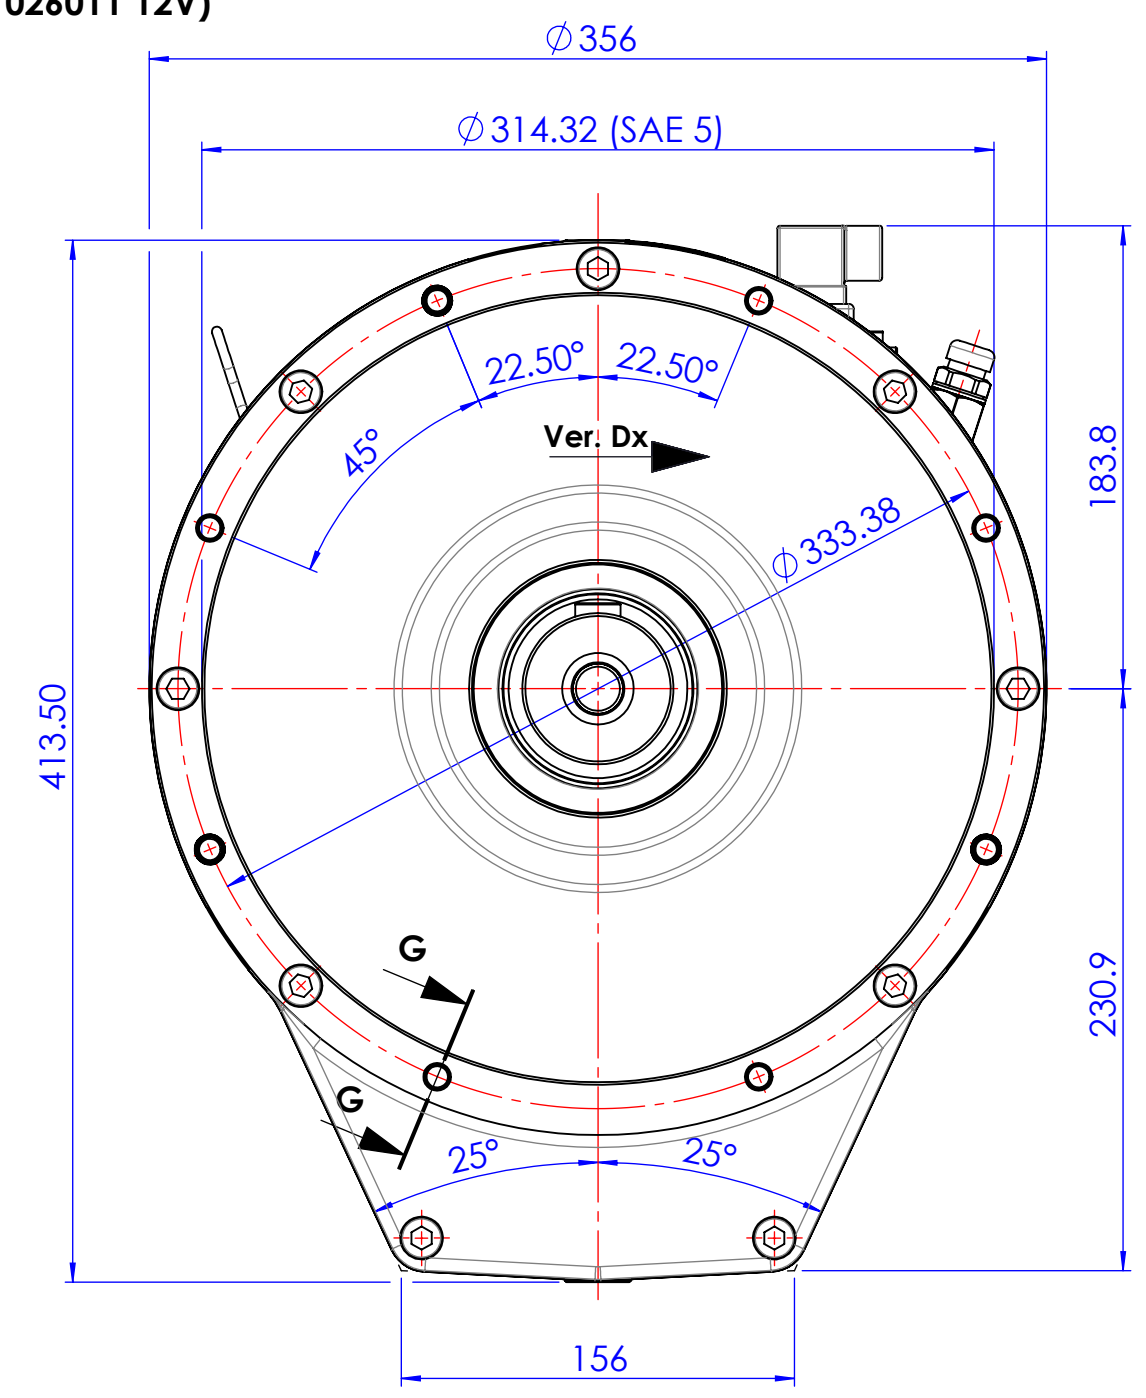


SEZIONE C-C

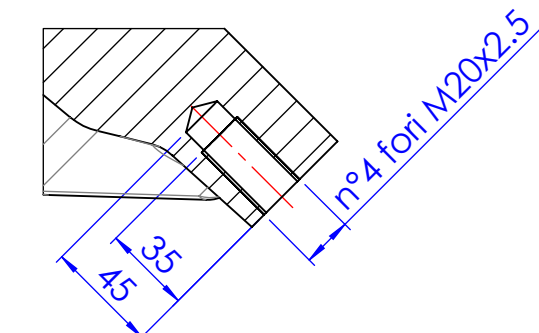



SEZIONE D-D

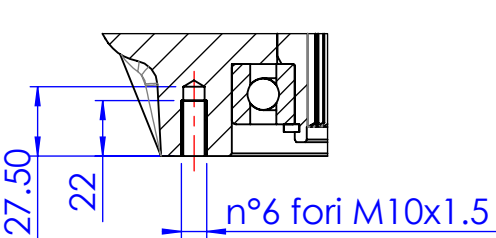



SEZIONE B-B

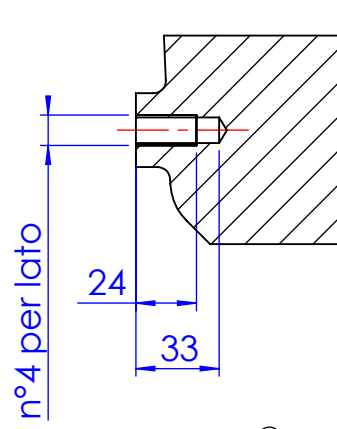

SEZIONE G-G

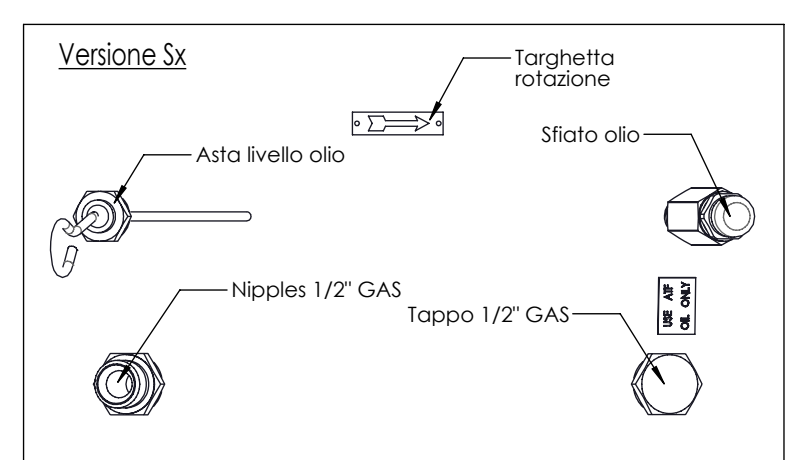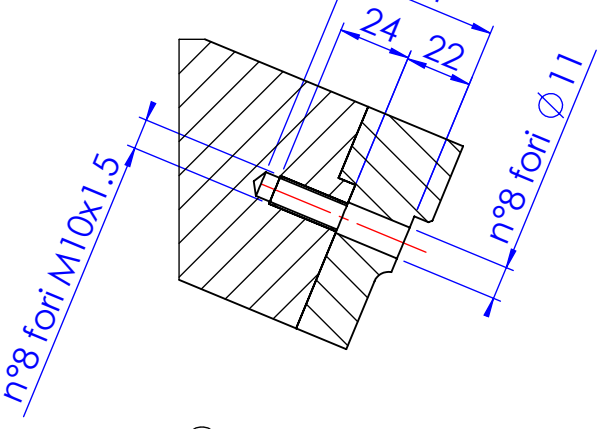

SEZIONE E-E

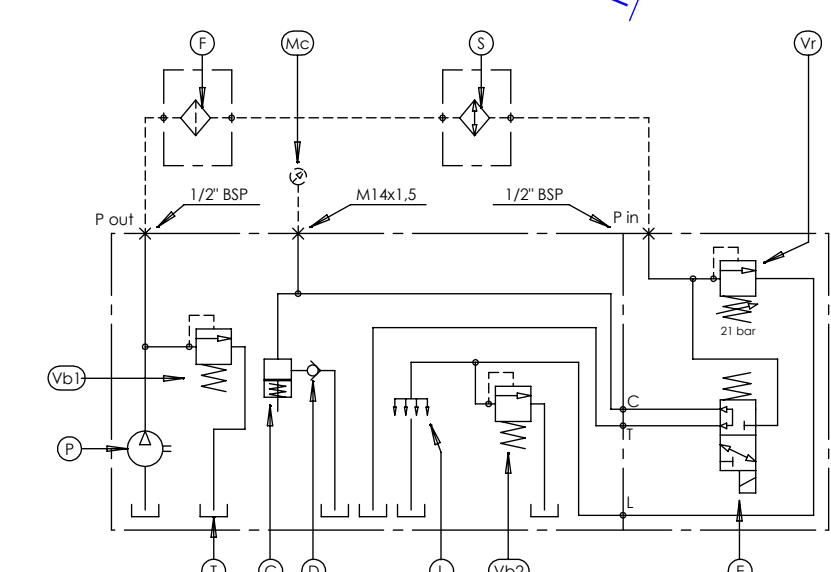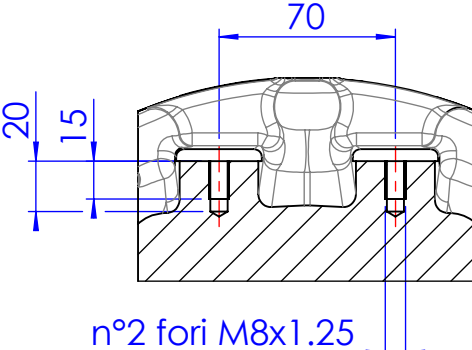


- C Frizione / Clutch
D Drenaggio / Drain
E Elettrovalvola / Solenoid valve
F Filtro / Filter
L Lubrificazione / Lube
Mc Presa press. FRIZ. / Clutch pressure check gauge
P Pompa / Main pump
S Scambiatore / Cooler
T Serbatoio / Tank
Vb1 Valvola by-pass principale / Main by-pass valve
Vb2 Valvola by-pass / By-pass valve
Vr Valvola Regolatrice / Pressure regulator ROR valve

PRIMO UTILIZZO MONTAGGIO/FIRST USE ASSEMBLY:
PRIMO IMPIEGO MODELLO/FIRST USE MODEL:
SIMILE A/SIMILAR TO:

METRIC

NOTICE! THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF
TWIN DISC, INCORPORATED
THIS NOTICE IS NOT INTENDED TO NULLIFY OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.



MODELLO / MADE FROM:
PESO / WEIGHT: kg
WR: kg-m
TOLL. GEN. DILAVORAZIONE
H13 FORO - H13 ALBERO
14 DIMENSIONI LINEARI
15' fino Ø200 10' fino Ø500

MATERIALE / MATERIAL:
TRATT. TERMICO / HEAT TREAT:
DESCRIZIONE:
**INGOMBRO
PFI120 X POMPA IDRAULICA**

TRATT. SUP. / SURFACE TREATMENT:
DESCRIPTION:
**INSTALLATION
PFI120**

DATA / DATE:
03/04/2006
SCALA / SCALE:
1:3
DIS / DRAWN:
GP
VERIF. / CHECK:
GG
APPROVATO/APP:
GG

- NDWF-4000303 10/11/2017
MODIFICA / CHANGE NO. DATA / DATE

TWIN(DISC.)
DECIMA - ITALY

ITP120ET00101

FORMATO / SIZE: A2
FOGLIO / SHEET: 1 OF 1
INDIC. MODIF. / REV: -