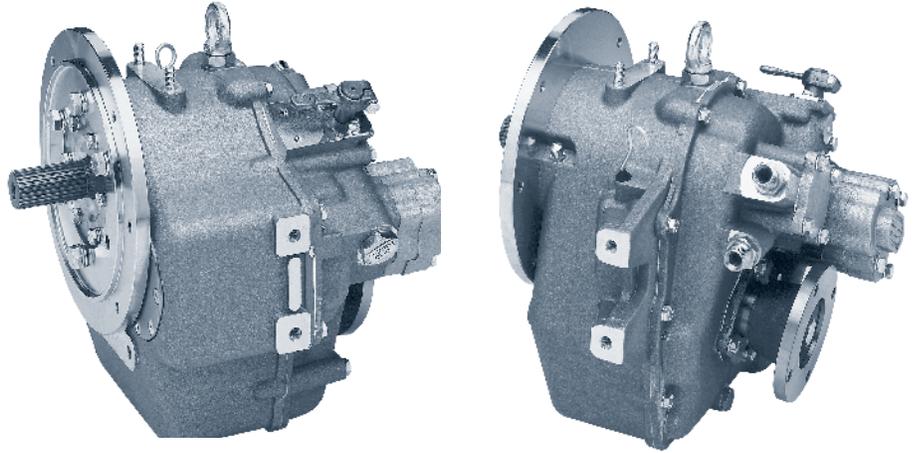


MAXIMUM 210 KW (282 HP) @ 3000 RPM [PLEASURE CRAFT DUTY]**STANDARD EQUIPMENT****MG-5015 A**

8° down angle on output shaft
 Aluminum alloy housing
 Hydraulically-operated, multiple-disc clutches
 SAE housings no. 3 and no. 4

**OPTIONS**

SAE 3 bell housing (H=12, 5 mm) (H=33 mm)
 SAE 4 bell housing (H=12, 5 mm) (H=33 mm)
 BW bell housing (H=13, 5 mm) (H=30 mm)
 11.5" Dual stage coupling (Centa CFDS25)
 Heat exchanger kit
 Propeller shaft flange
 Cable bracket
 Trolling valve – factory fitted
 Weight (dry weight – alloy housing)

MG-5015 A**X****X****X****X****X****X****X****X****36 kg**

Contact Twin Disc for Survey Society Approvals and Classifications.

Specifications subject to change without prior notice in the interest of continual product improvement.

INPUT RATINGS – KILOWATTS (KW) (HORSEPOWER [HP])*

Reduction Ratios :1	Pleasure Craft Duty	Light Duty	Intermediate Duty	Maximum rated input speed
	@3000 RPM	@3500 RPM	@2800 RPM	
1.5	210 kW (282 hp)	205 kW (275 hp)	125 kW (167 hp)	4500 rpm
2.09	175 kW (235 hp)	160 kW (215 hp)	102 kW (137 hp)	
2.40	150 kW (201 hp)	138 kW (185 hp)	87 kW (117 hp)	

* Ratings shown for use with standard right hand rotation engines.

