
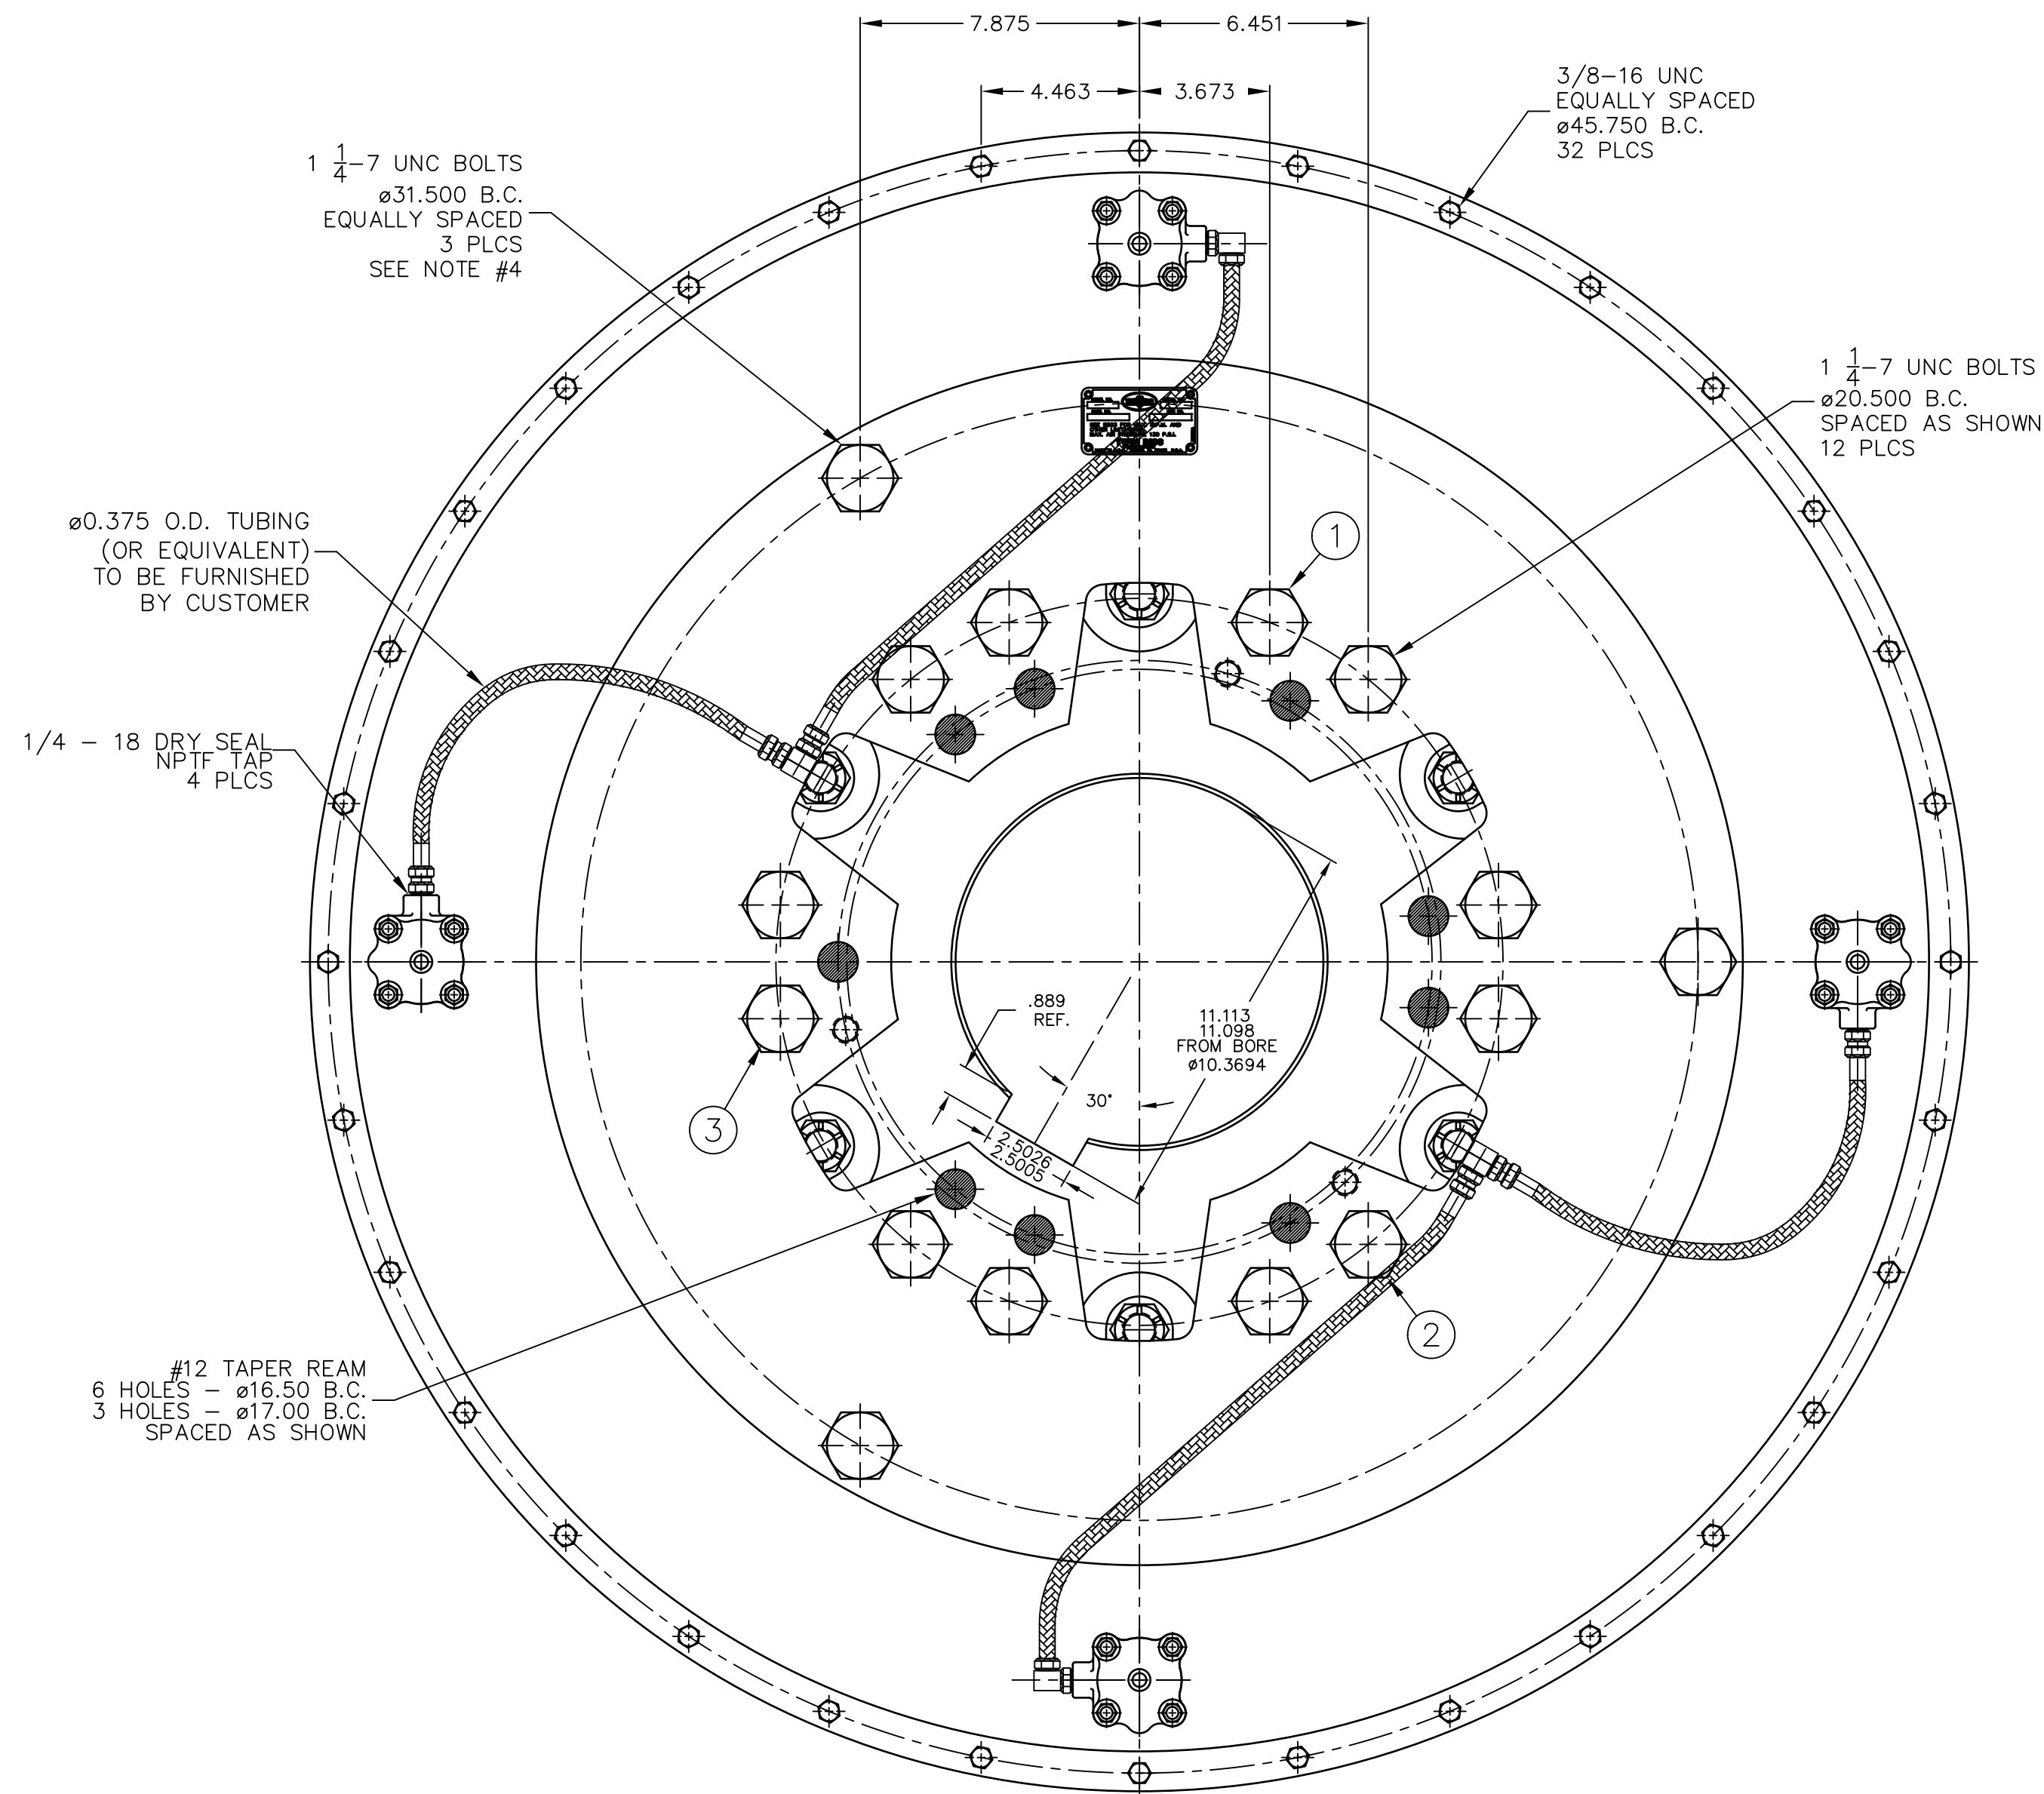


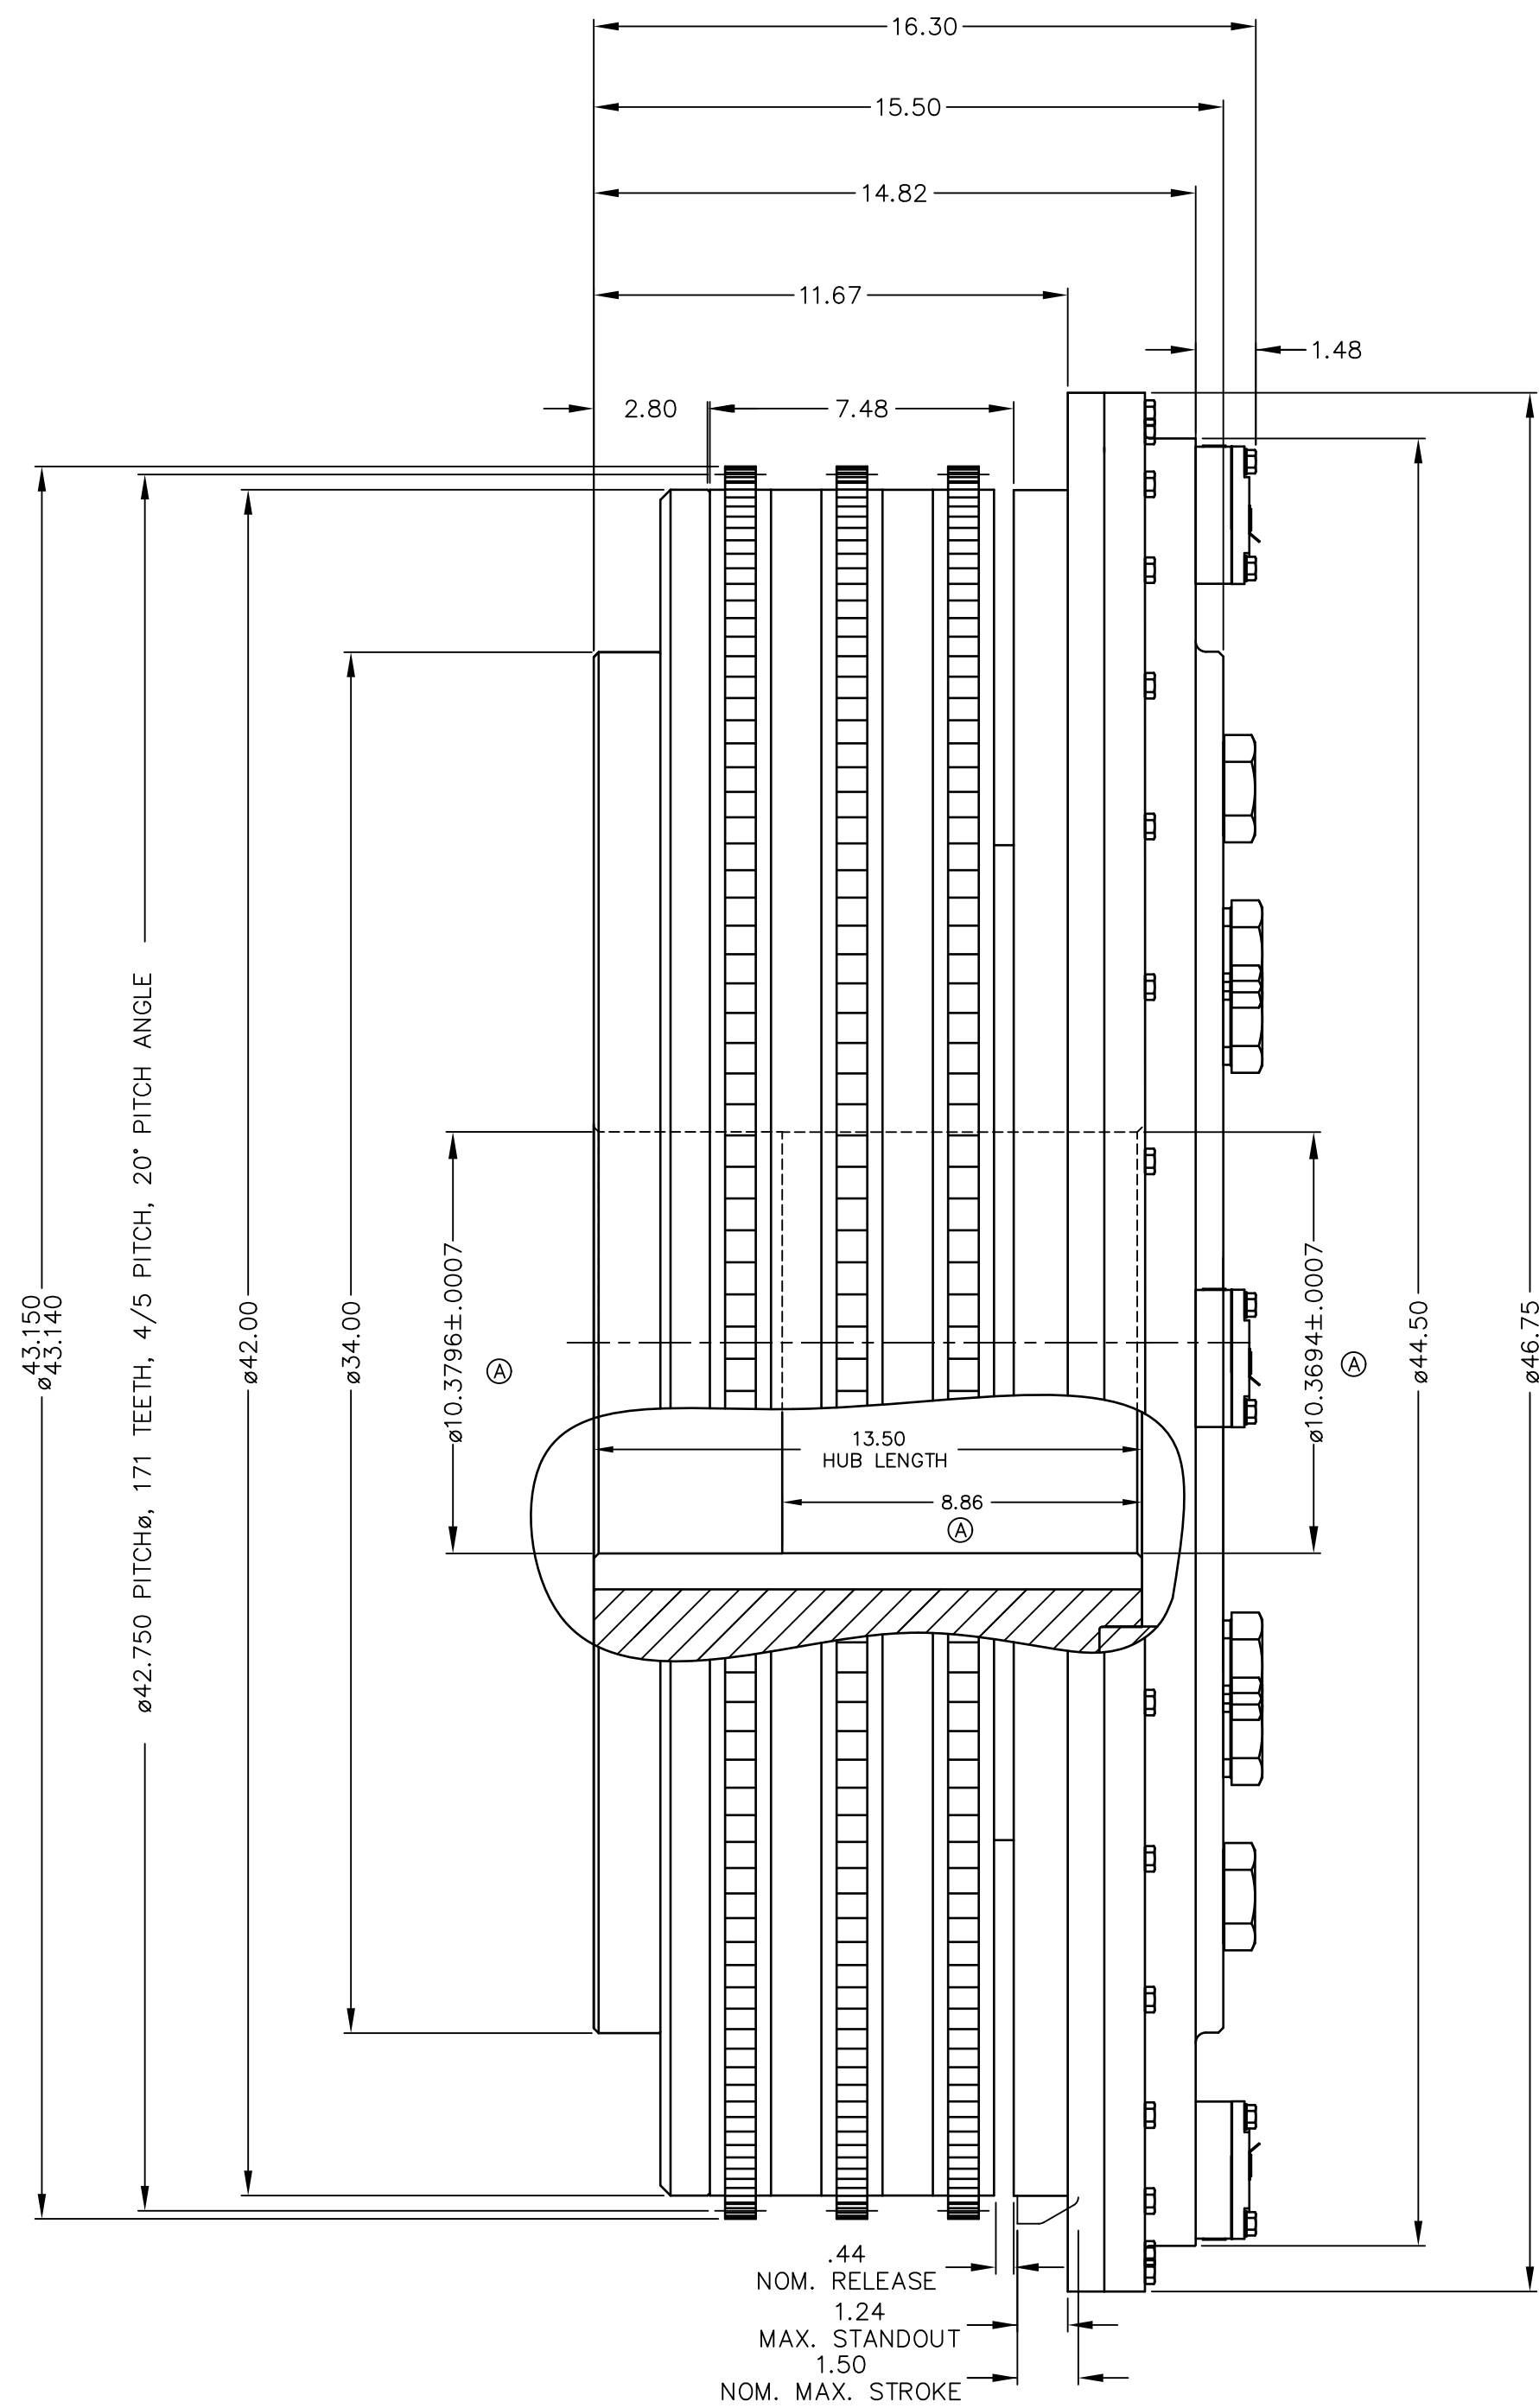

- NOTES:
- 1.) REFER TO BILL OF MATERIAL LIST WHEN ORDERING PARTS.
 - 2.) REFER TO CARE & OPERATION MANUAL FOR ADDITIONAL INFO.
 - 3.) REFER TO TWIN DISC STANDARD S503 FOR LIMITING CONDITIONS AND MAX. SPEEDS.
 - 4.) FOR EMERGENCY MECHANICAL CLUTCH LOCK-UP REMOVE THESE THREE SCREWS AND INSERT THREE SCREWS MARKED ① ② ③

UNLESS OTHERWISE SPECIFIED MACHINED DIMENSIONS X.X ±0.030 X.XX ±0.010 X.XXX ±0.005 ALL ANGULAR TOLERANCES ±1° GEOMETRIC TOLERANCING PER ASME Y14.5M 1994	WEIGHT		WR*	FIRST USE	INCH	MATERIAL	HEAT TREAT	.25:1		RACINE, WI 53403 – USA					
	lbs.		lbs./in. ³	ASSY. :			SIMILAR TO P0342C001	NAME P0342 AIR CLUTCH	DRN.	ES	P0342C005				
			MODEL : P0342	CHK.					YU						
	NOTICE! THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF TWIN DISC, INCORPORATED		THIS NOTICE IS NOT INTENDED TO VIOLATE OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.						APPD.	DAJ		DWG SHT.	D	2 OF 2	REV A