


CW (R)
DIRECTION OF ROTATION: LOOKING ON DRIVE SHAFT

DISPLACEMENT: 11.3 cc/rev.

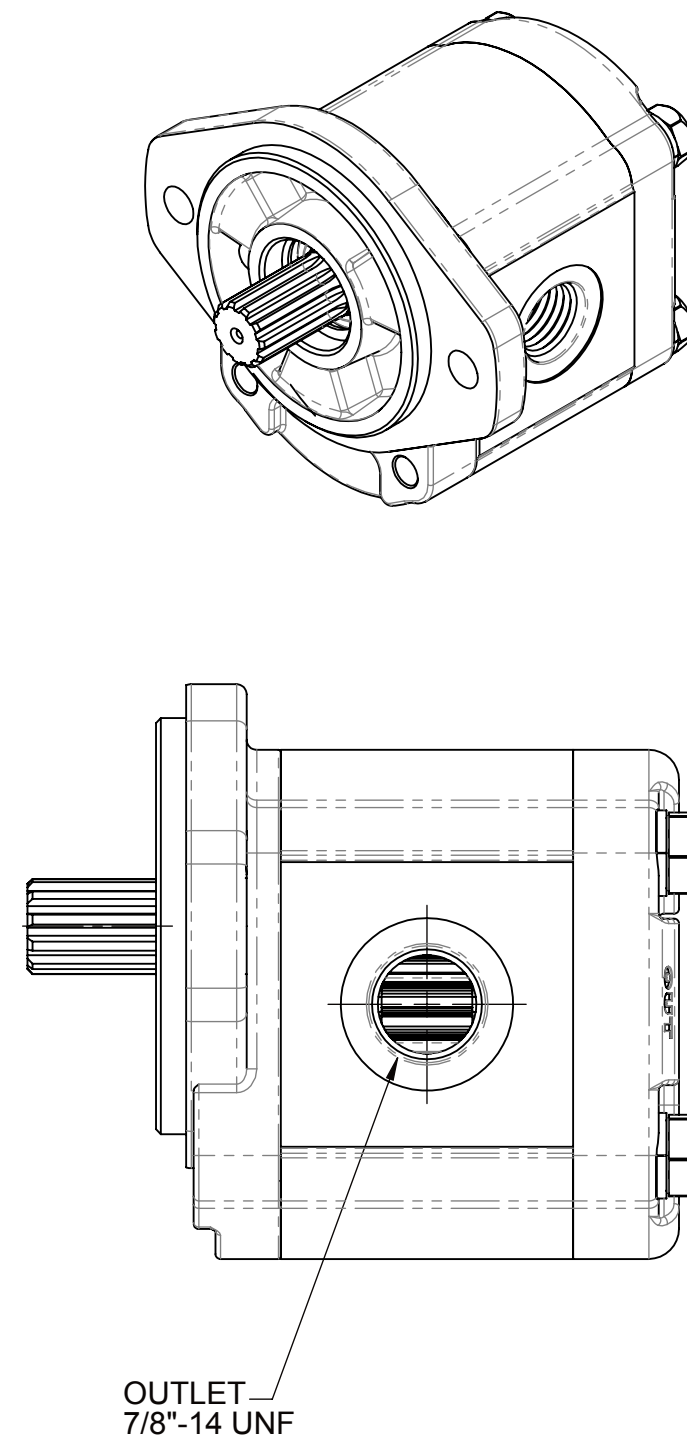


FIRST USE ASSEMBLY:	WEIGHT: 3.53 kg
FIRST USE MODEL:	WR ² : kg-m ²
SIMILAR TO:	
METRIC	
NOTICE! THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF TWIN DISC, INCORPORATED	
THIS NOTICE IS NOT INTENDED TO NULLIFY OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.	

THIRD ANGLE PROJECTION
UNLESS OTHERWISE SPECIFIED MACHINED DIMENSIONS
X. ±0.75
X.X ±0.25
X.XX ±0.13
ALL ANGULAR TOLERANCES ±1°
GEOMETRIC TOLERANCING PER ASME Y14.5M 1994

MATERIAL:
HEAT TREAT:
DESCRIPTION: INSTALLATION PUMP, GEAR X216228AP

DATE: 06/06/2018
SCALE: 1:1.5
DRAWN BY: LT
CHECKED BY: YU
APPROVED BY: DAJ

-	NDWF-08060	06/08/2018
REV	CHANGE NO.	DATE
 RACINE, WI 53403 - USA PX1035528B		
DWG SIZE: A3	SHEET: 1 OF 1	REV: -