
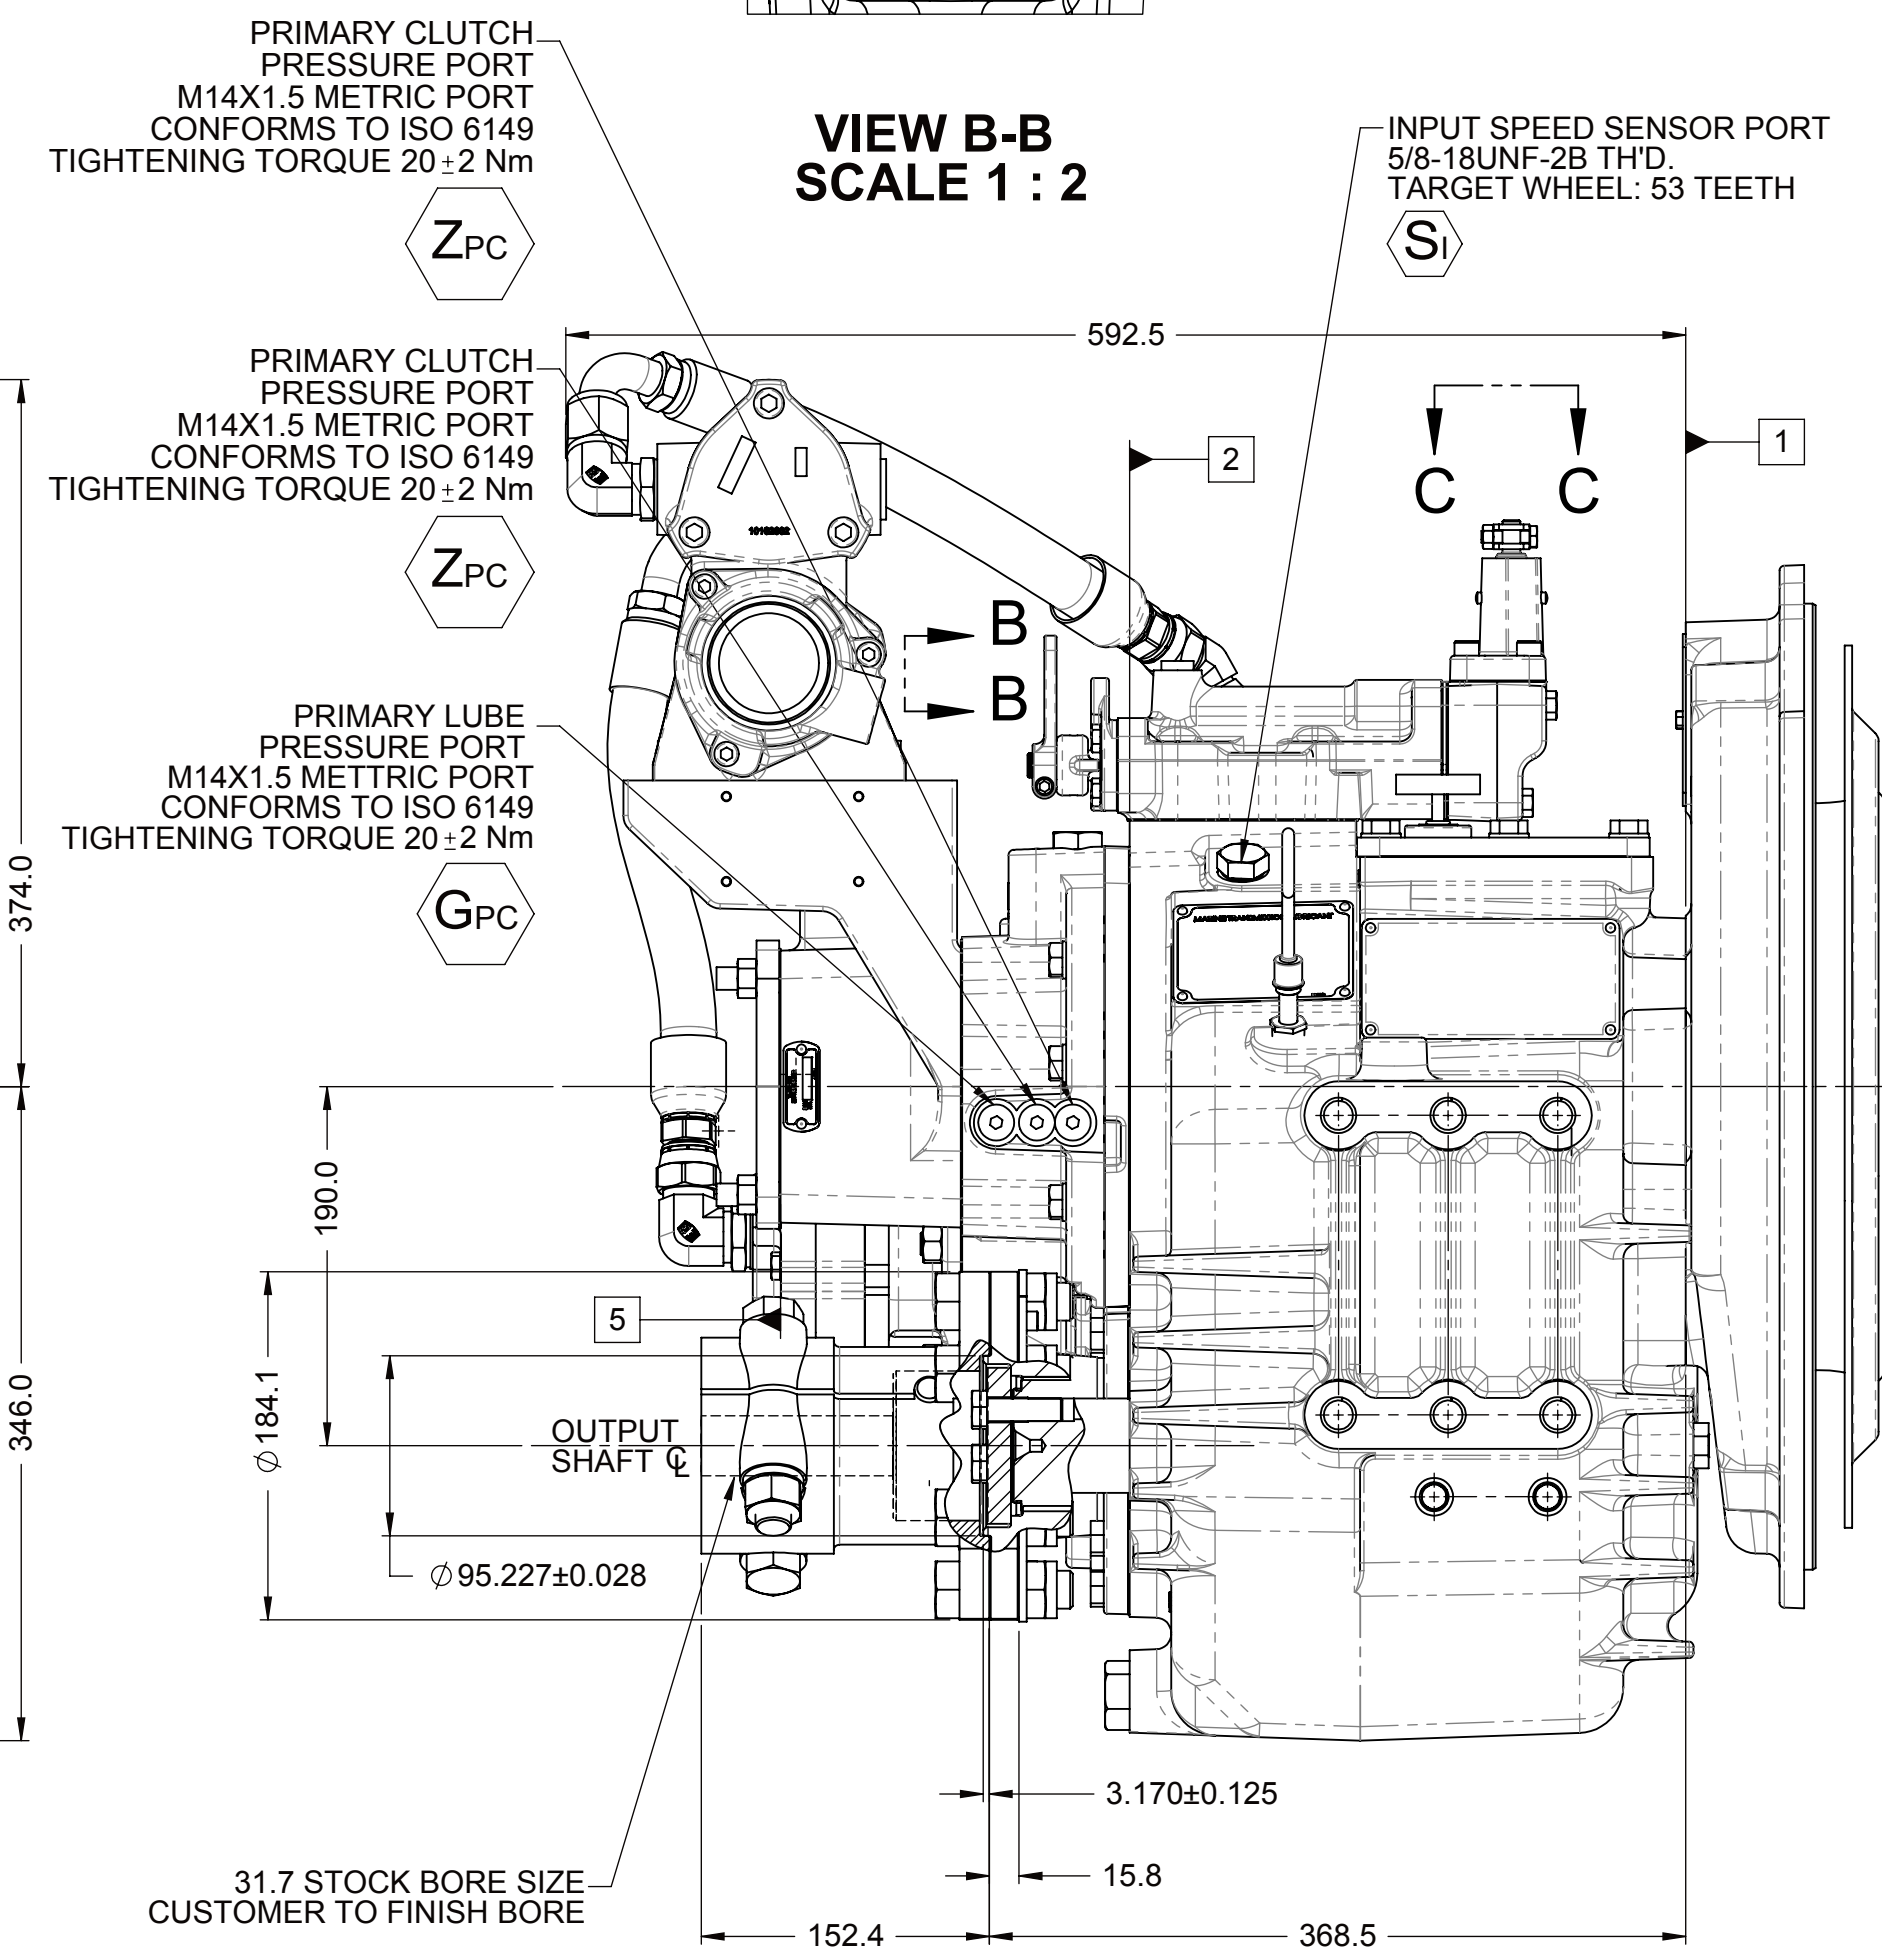
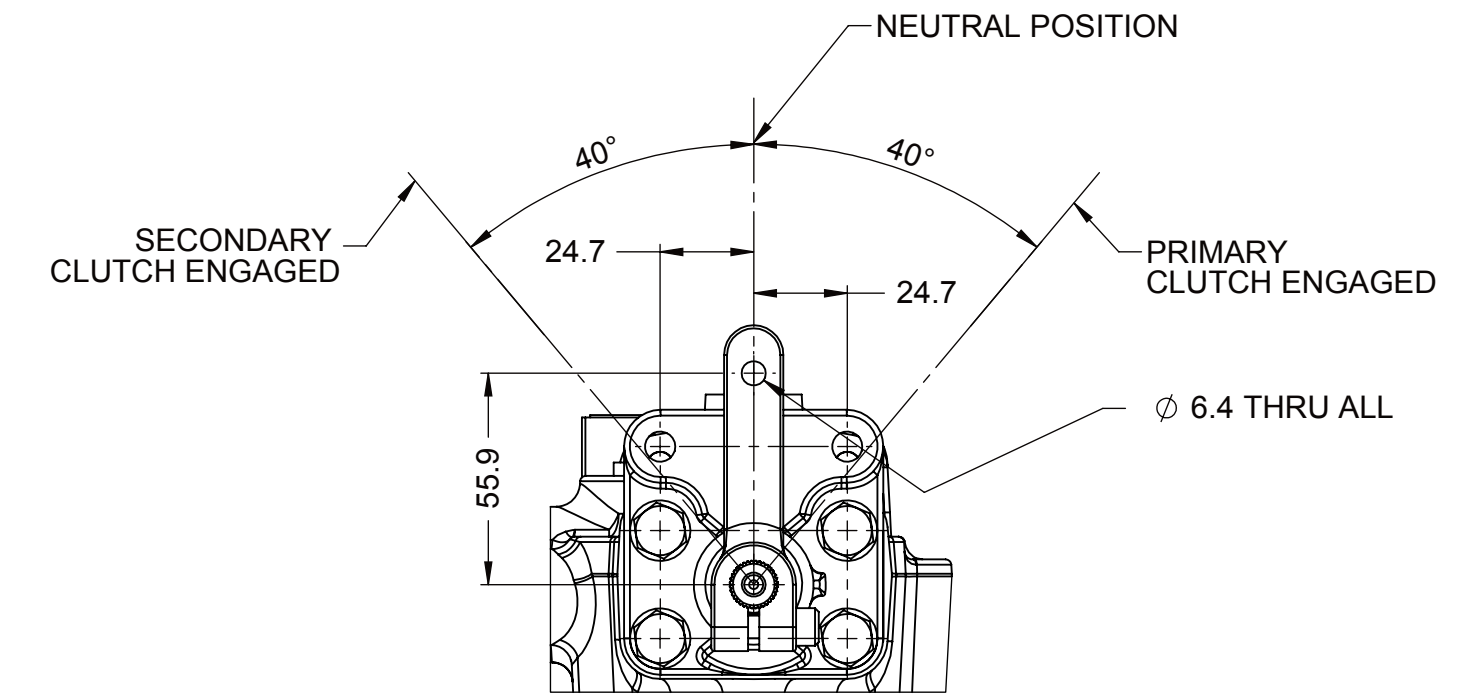
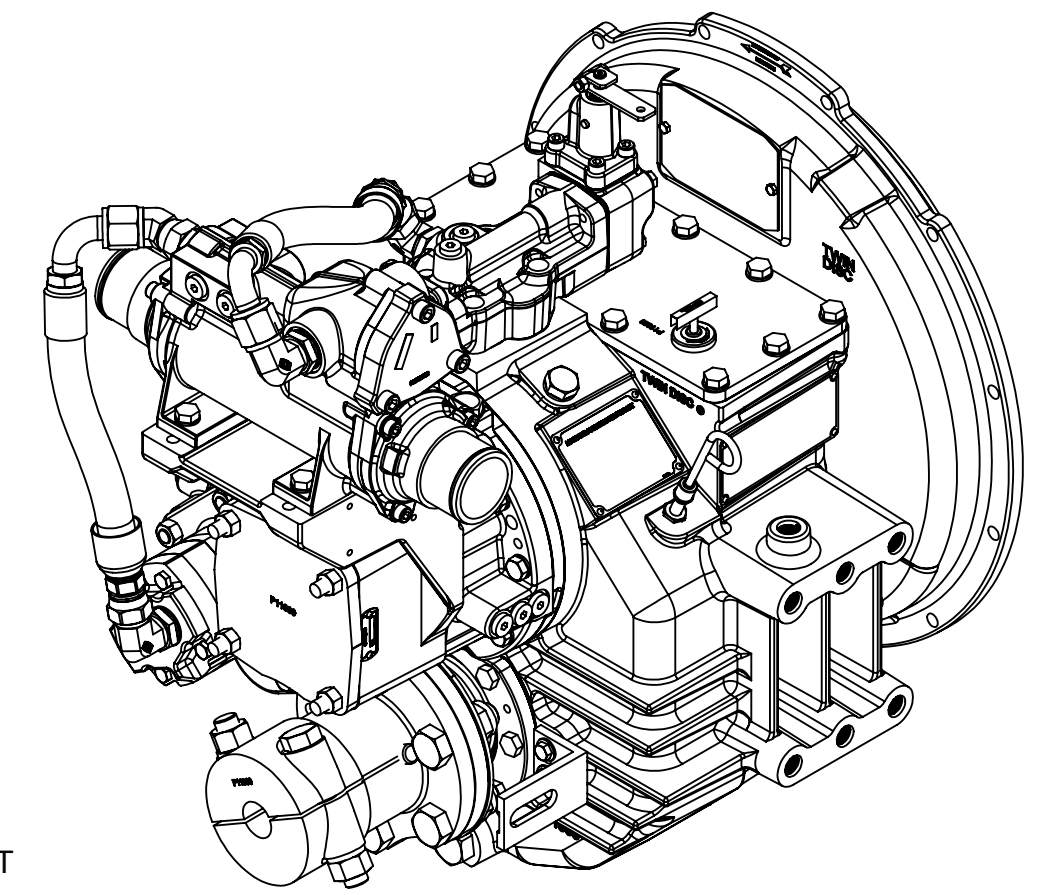
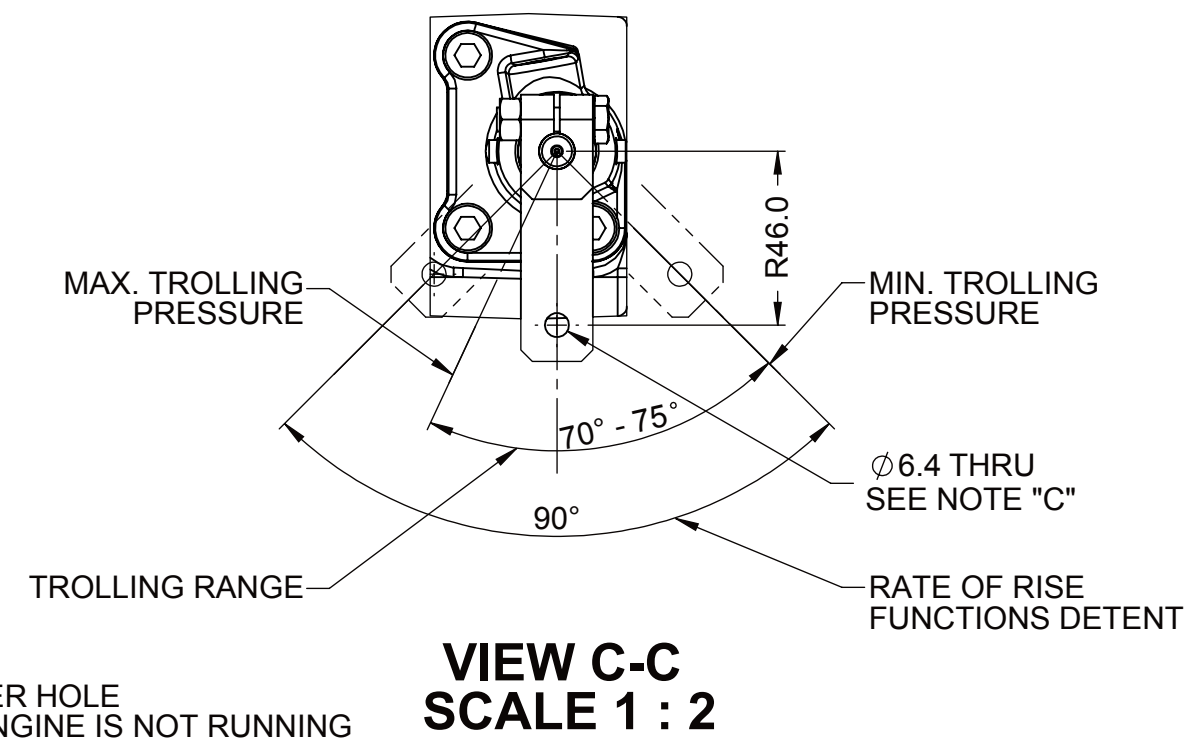
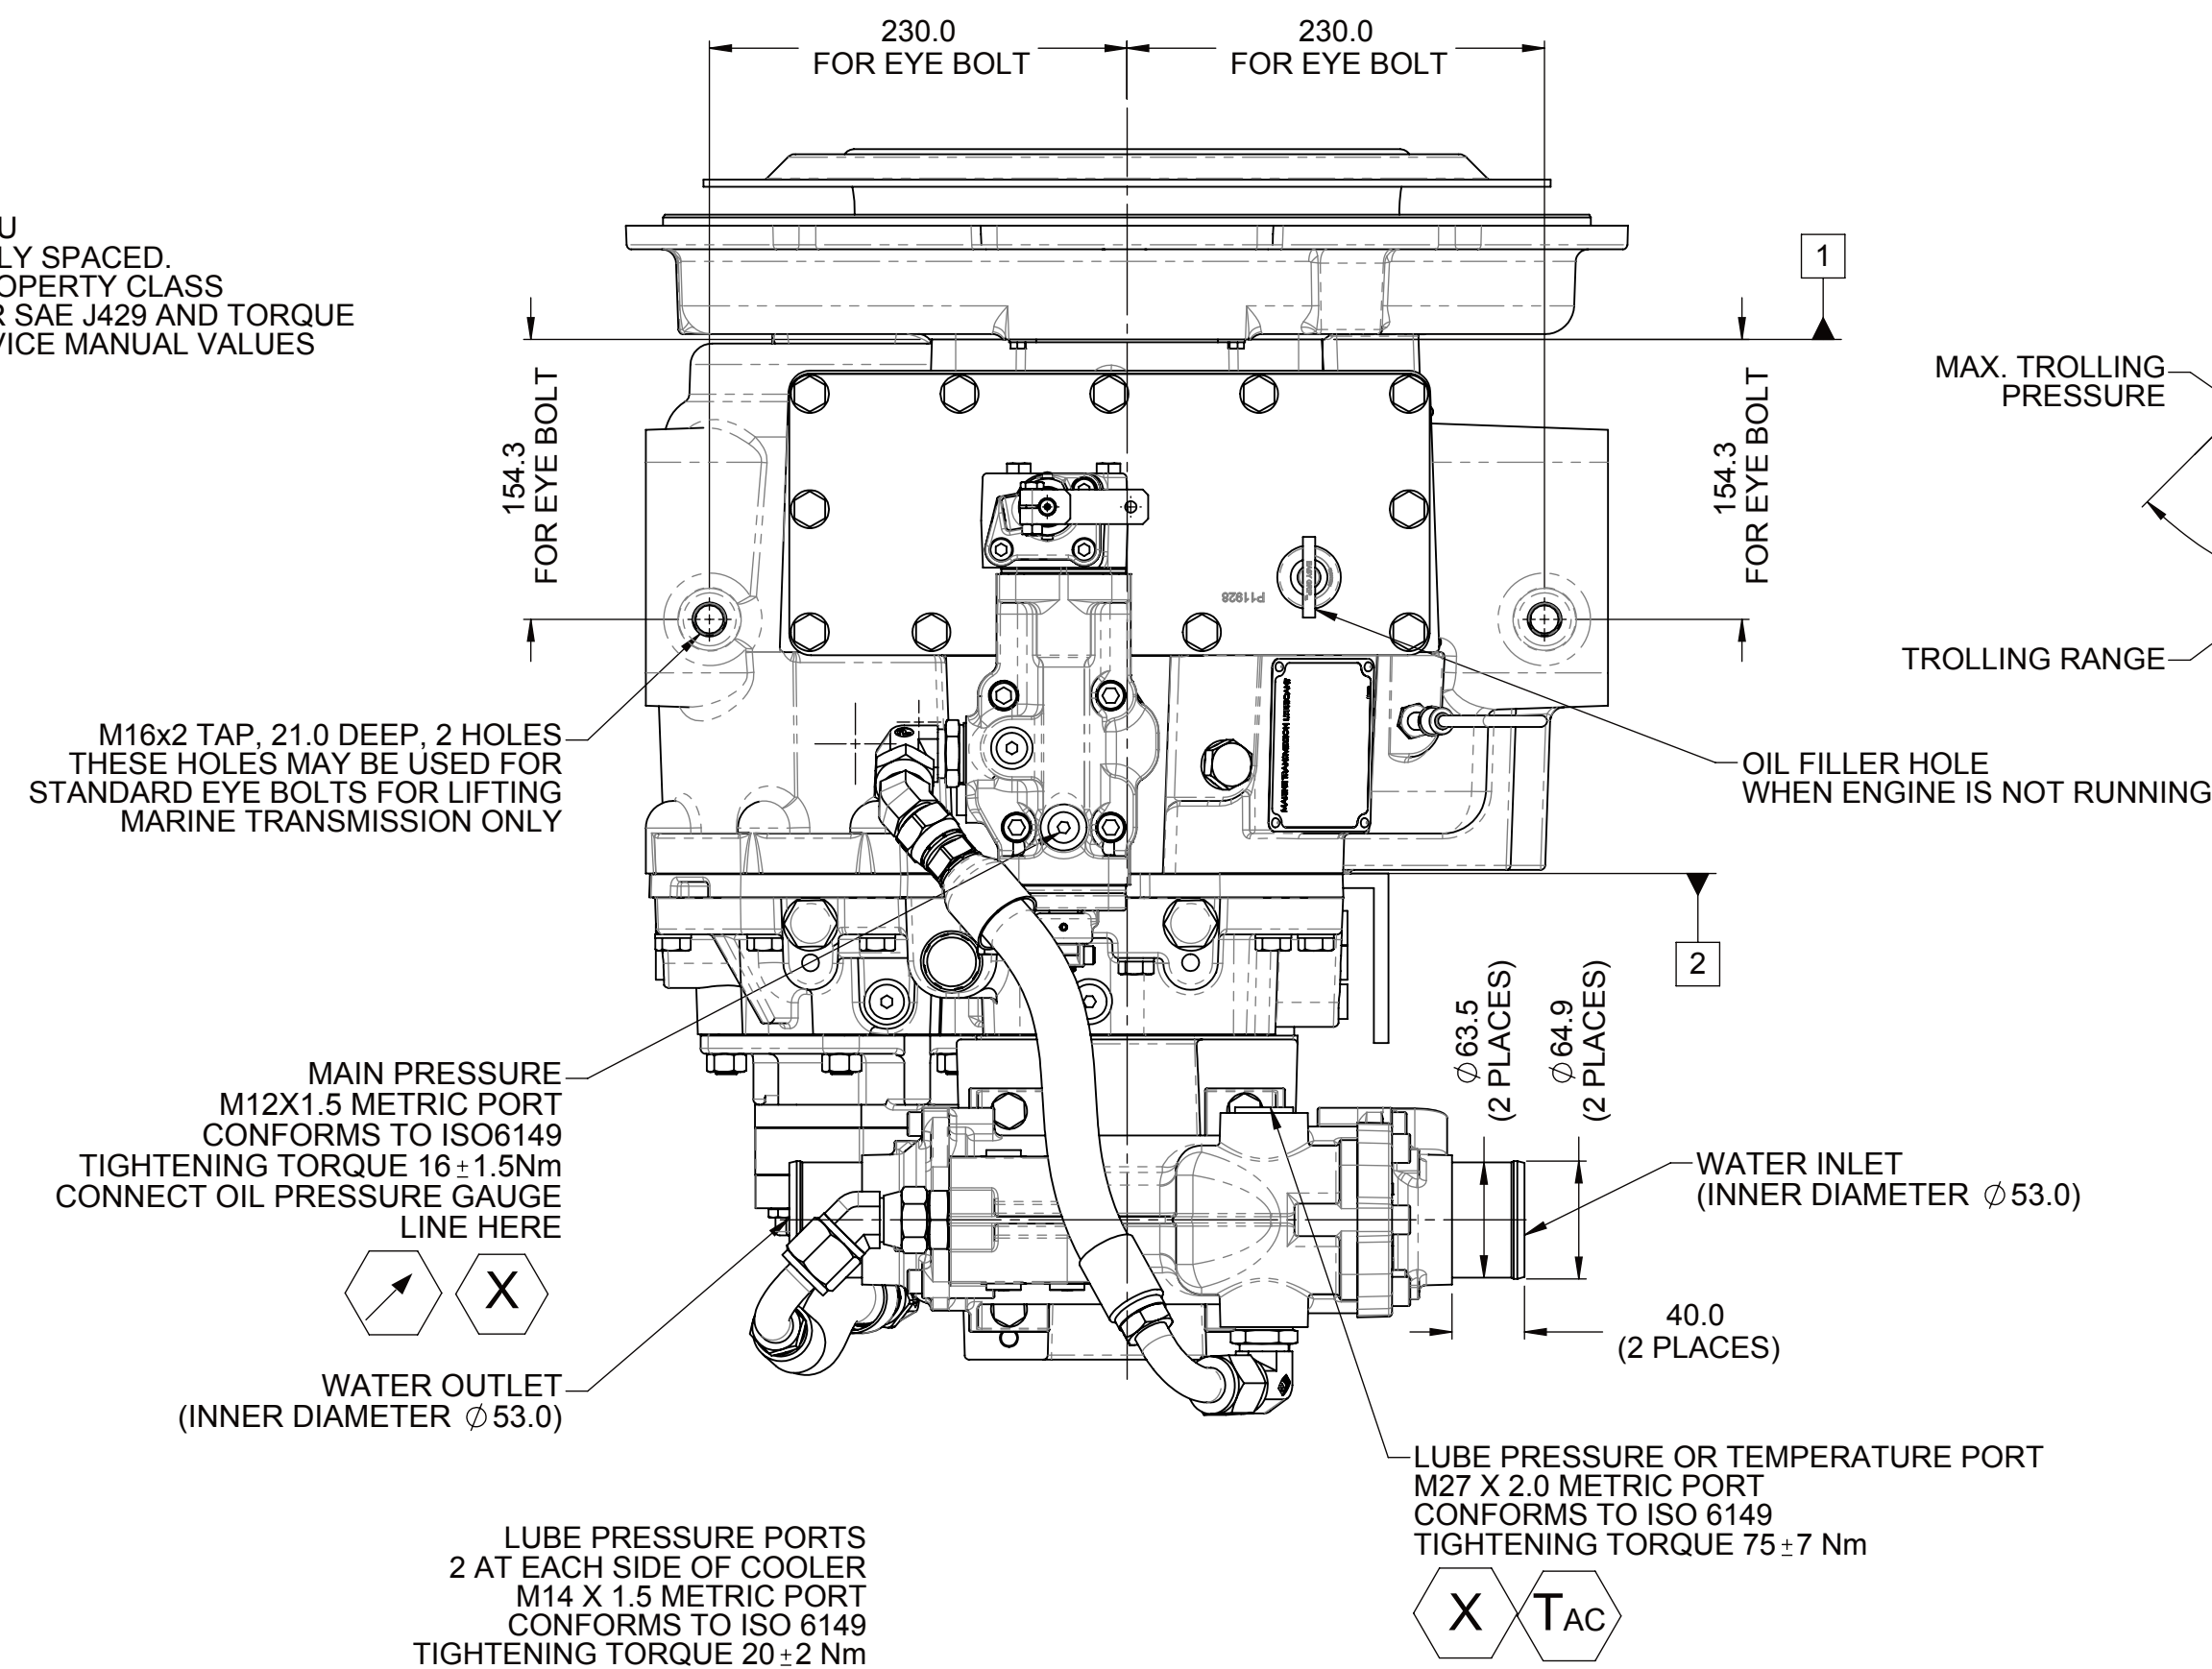
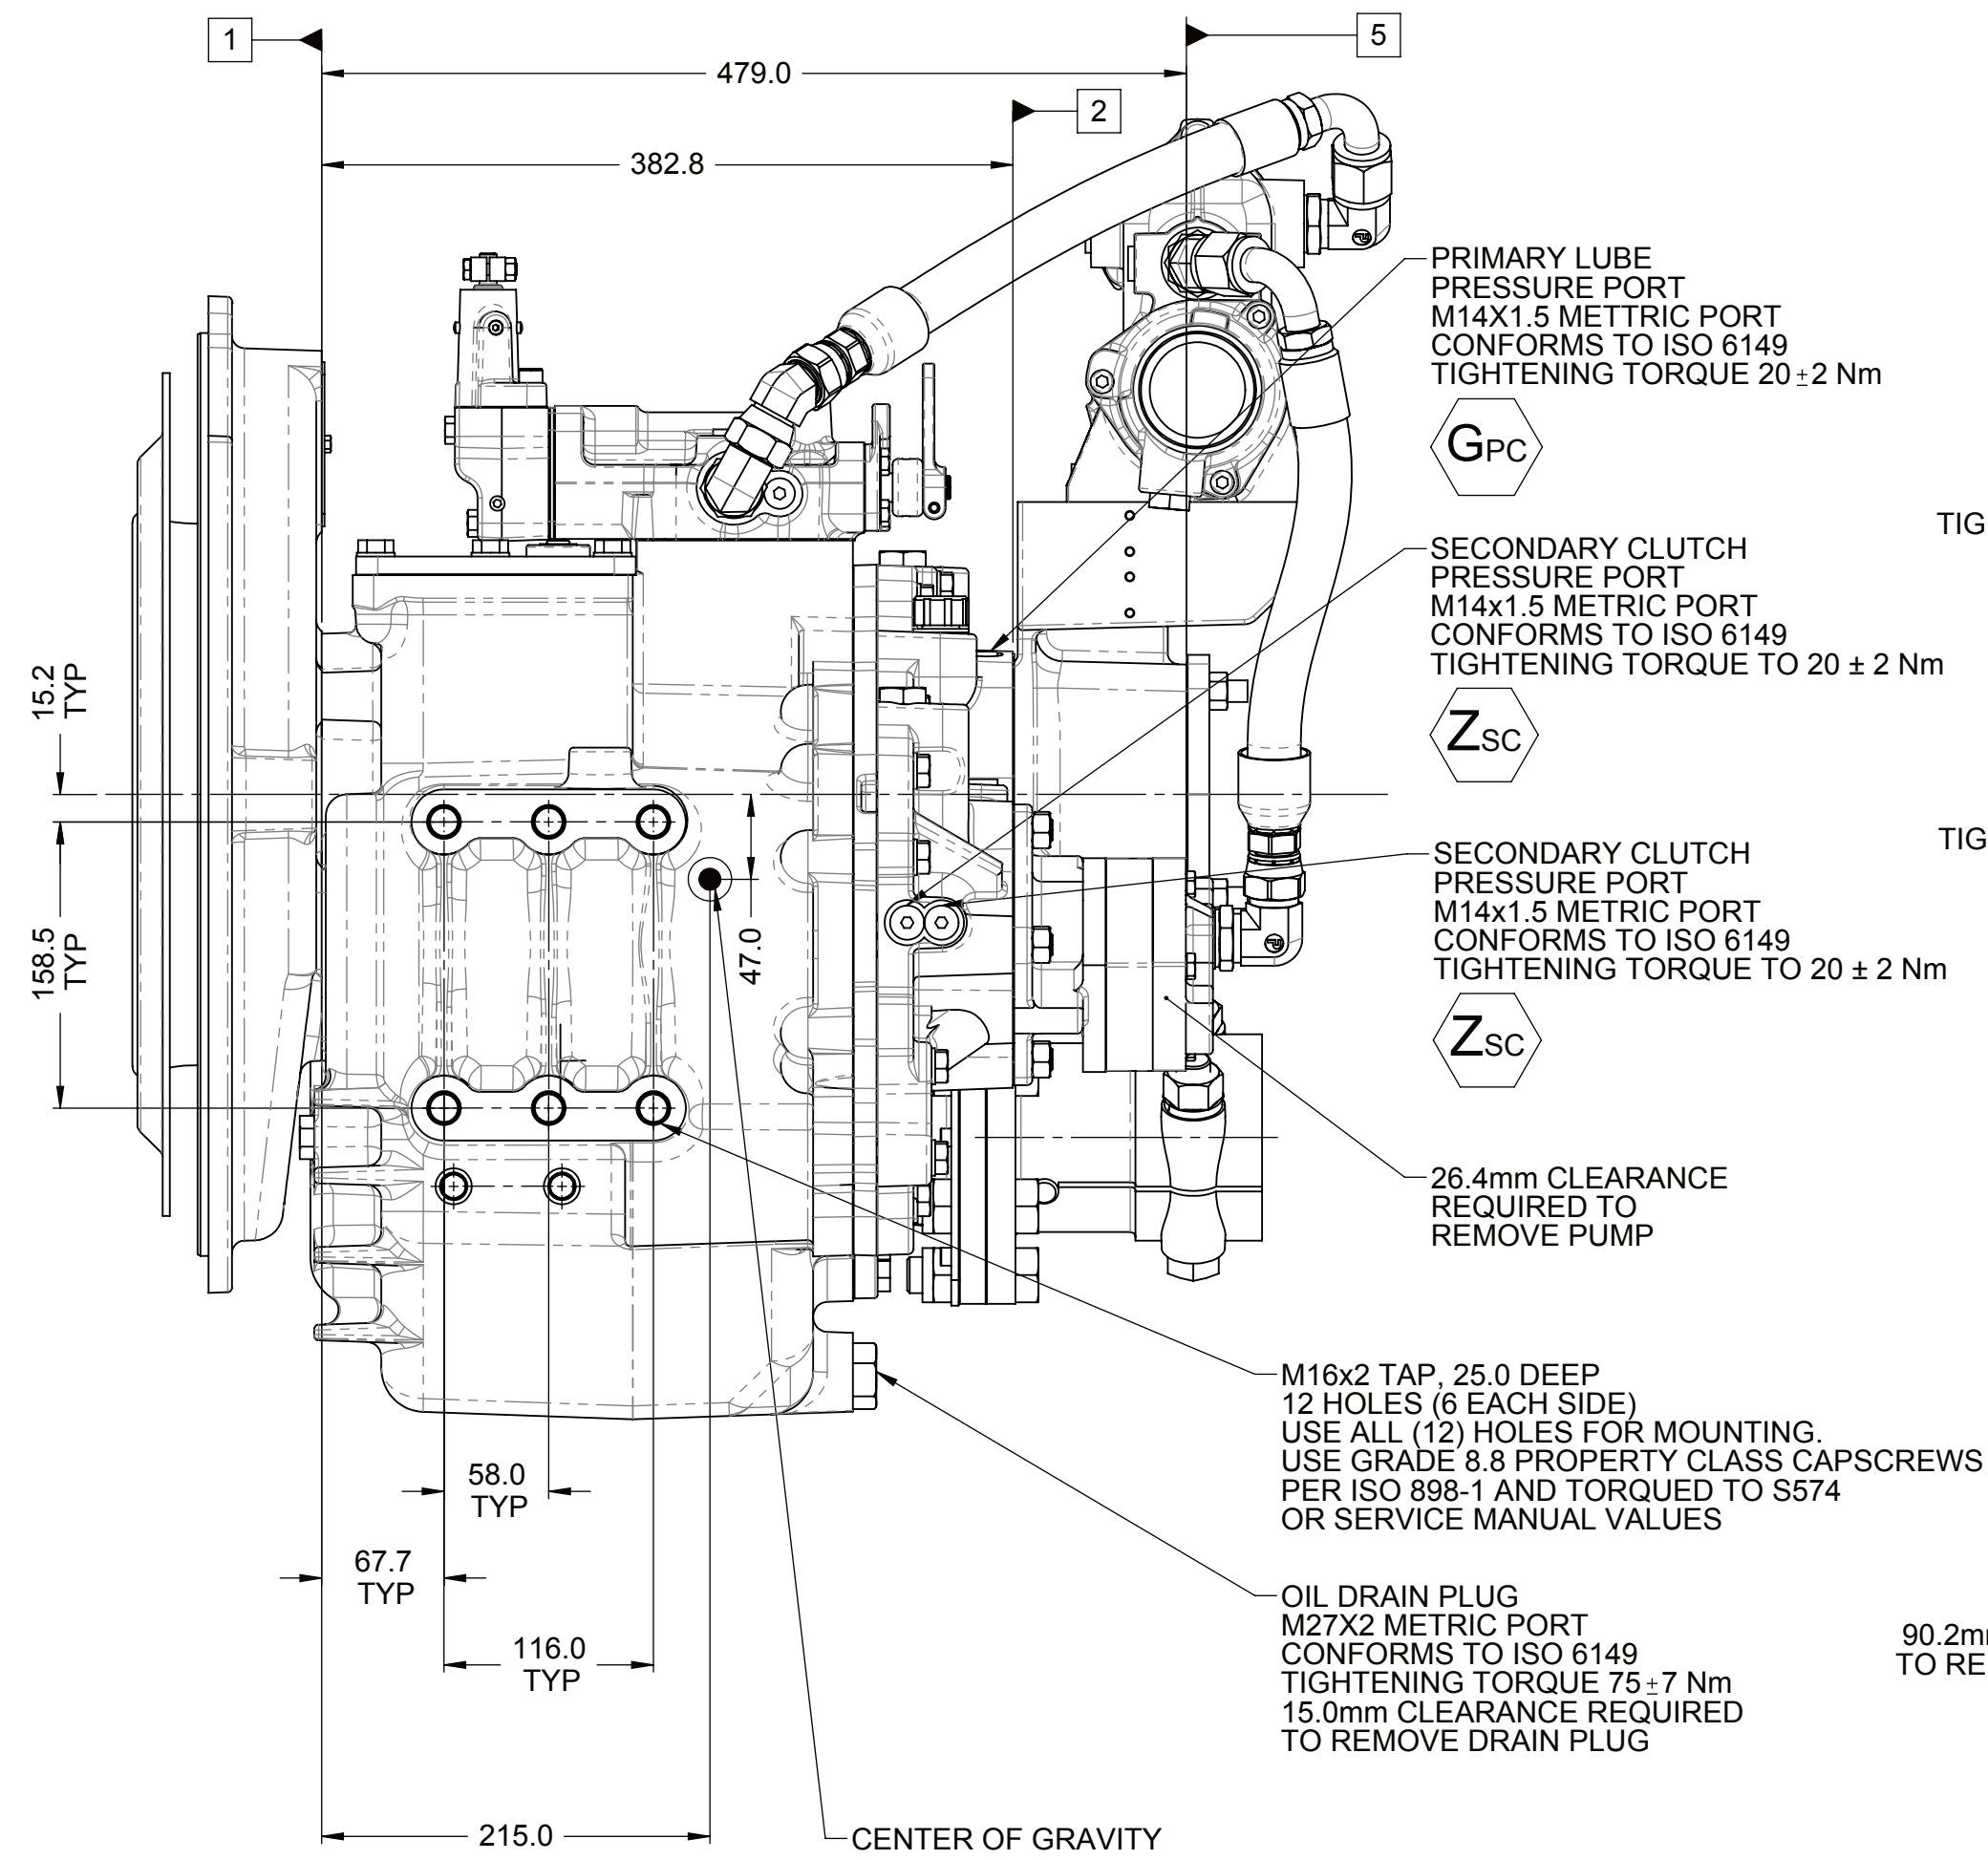


- | | |
|---|-----------------------------|
| 1 | INPUT GROUP MOUNTING FACE |
| 2 | PTO GROUP MOUNTING FACE |
| 3 | LEFT MOUNTING BRACKET FACE |
| 4 | RIGHT MOUNTING BRACKET FACE |
| 5 | PUMP MOUNTING FACE |

NOTE :
ALL POINTS AVAILABLE FOR TESTING ARE CODED 

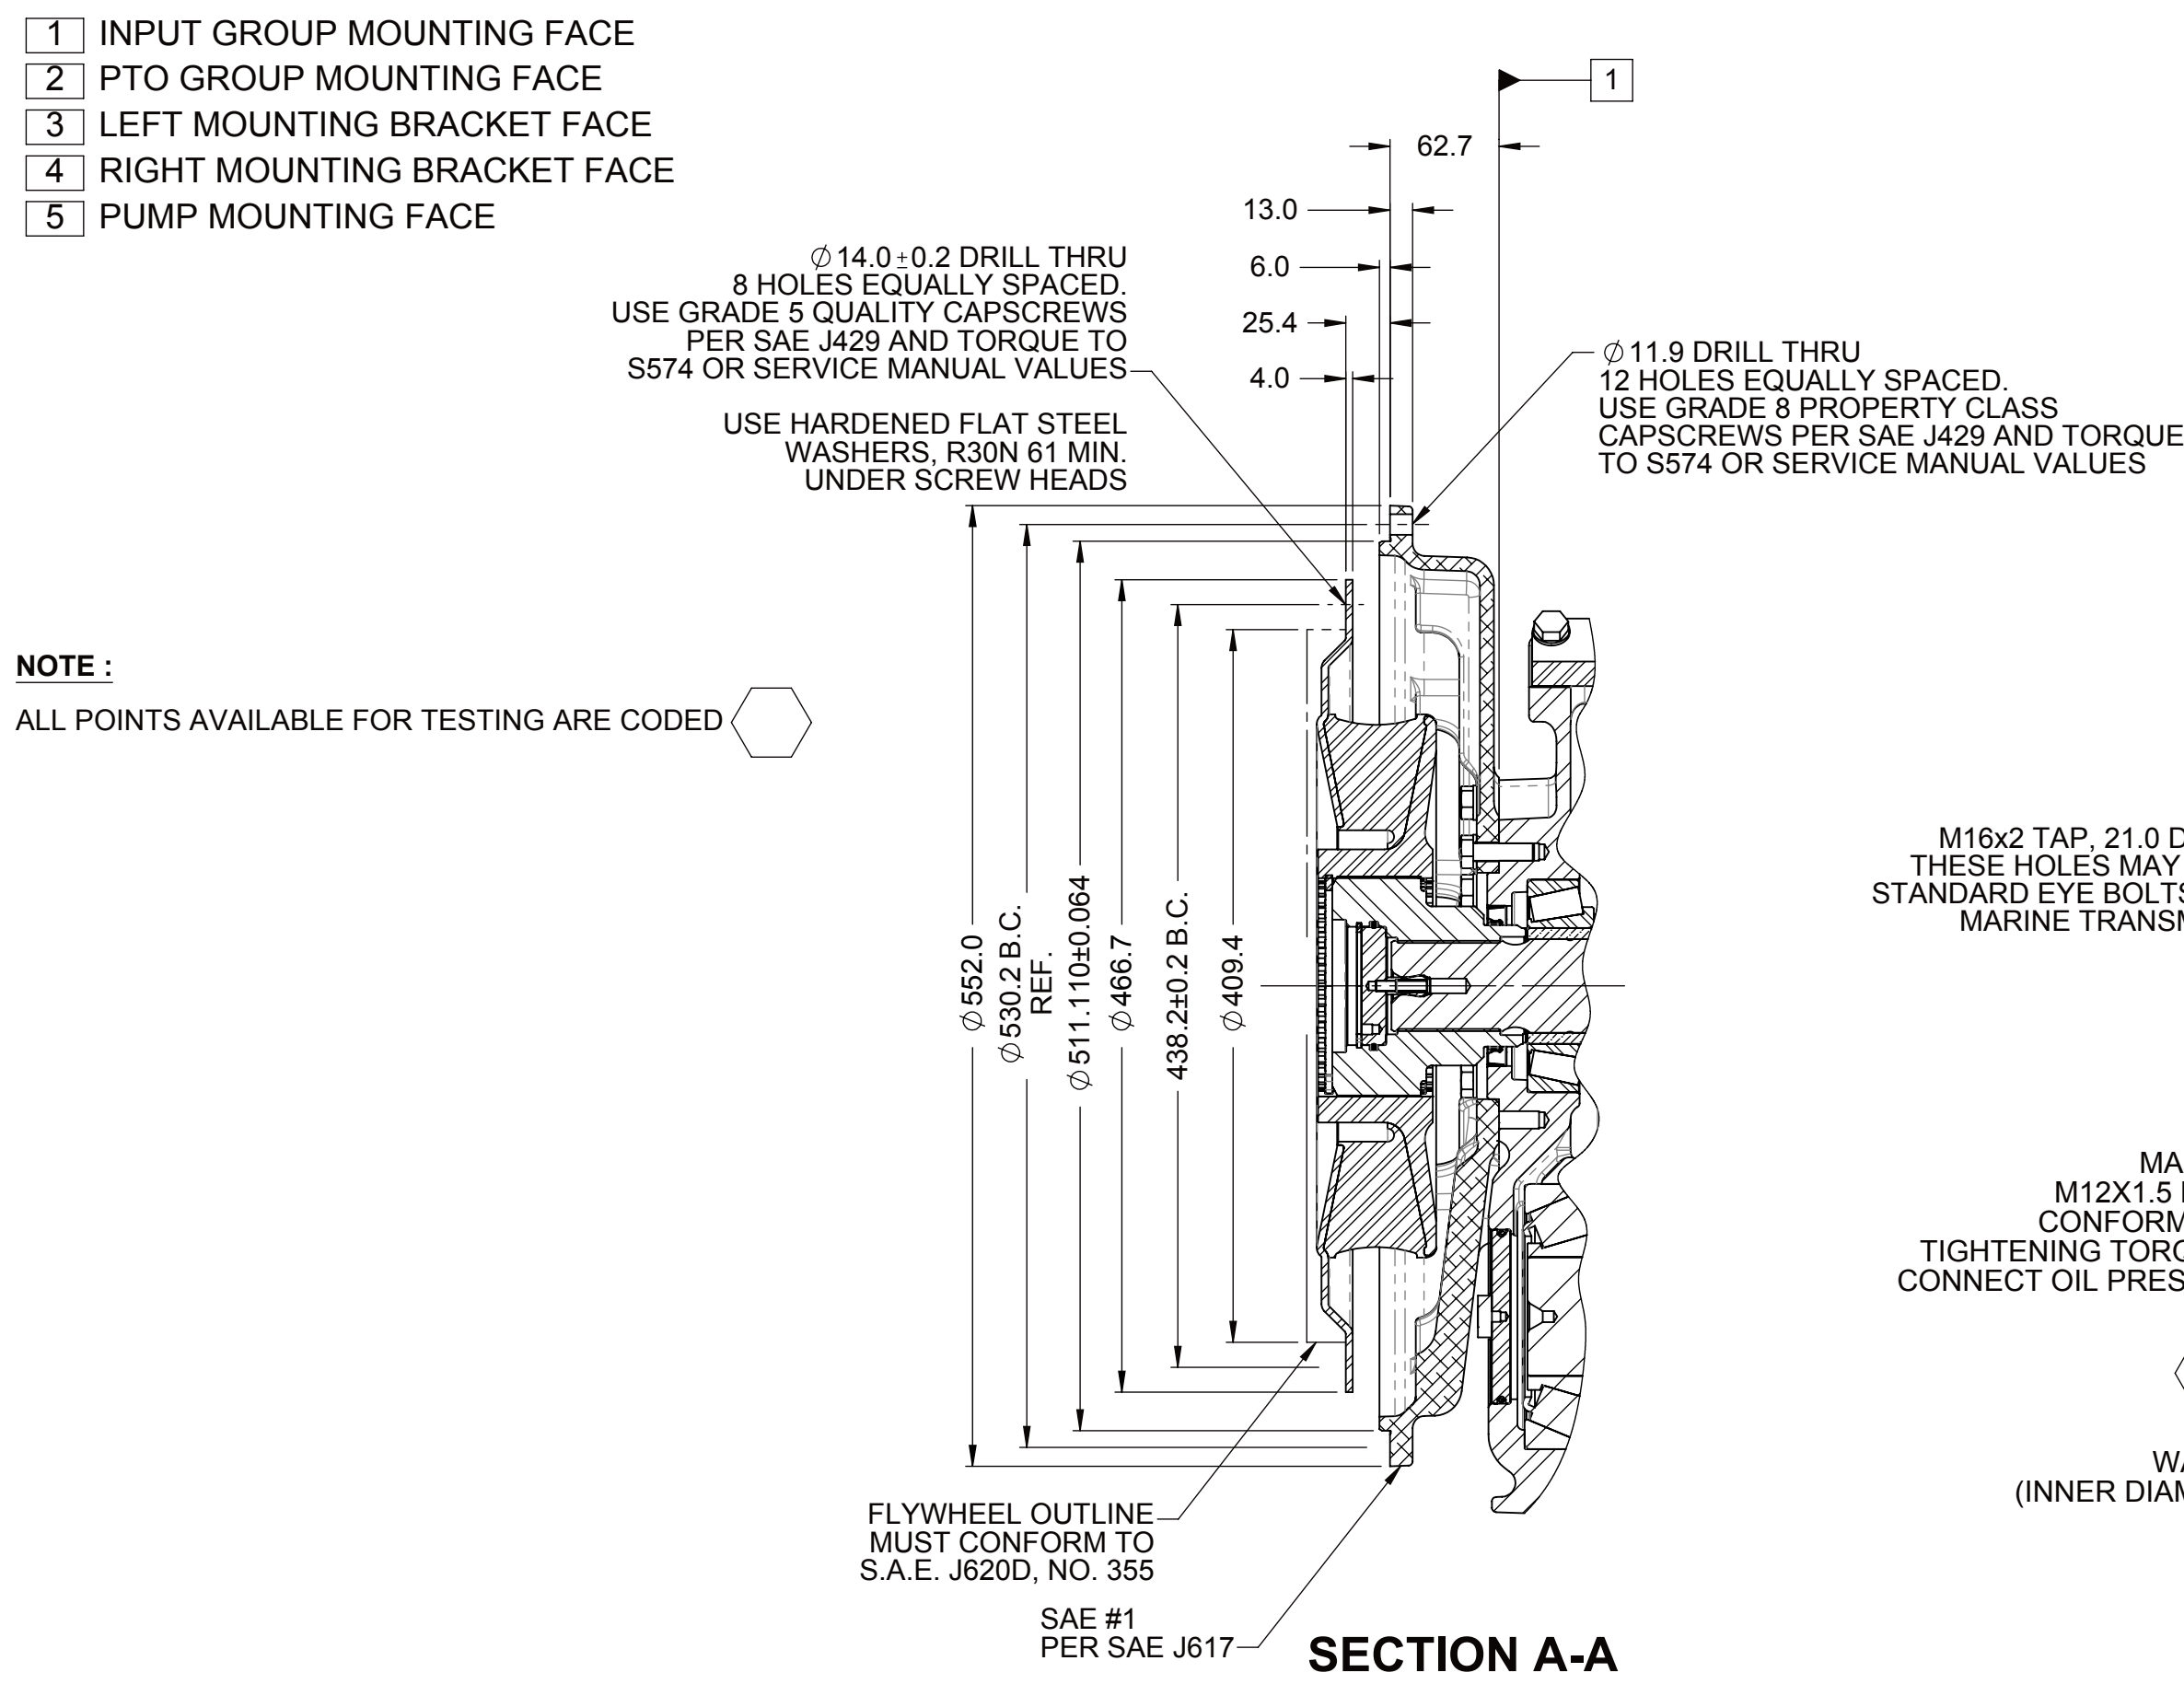

EQUIPMENT SHOWN:

- MG-5095SC PER PX13080 ASSEMBLY
- SAE #1/SAE 355 VULKAN VKE-4010 SERIES
- MECHANICAL CONTROL VALVE W/ TROLLING
- SAE 127-4 PTO ADAPTER W/ HEAT EXCHANGER BRACKET
- LIVE SAE 32-4 SPLINED ADAPTER
- MOUNTED PM13008 HEAT EXCHANGER
- PX11800 COMPANION FLANGE

FIRST USE ASSEMBLY: FIRST USE MODEL: SIMILAR TO:		WEIGHT: 252.07 kg WR ¹ : kg m ²		 THIRD ANGLE PROJECTION		MATERIAL: HEAT TREAT:		DATE: 05/28/2013 SCALE: 1:1		 RACINE, WI 53403 - USA	
METRIC NOTICE! THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER REMUNERABLE TO THE INTEREST OF TWIN DISC, INCORPORATED. THIS NOTICE IS NOT INTENDED TO NULLIFY OR LIMIT RIGHTS GRANTED BY THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.				UNLESS OTHERWISE SPECIFIED MACHINED DIMENSIONS X.X = 0.25 X.XX = 0.13 ALL ANGLUAR TOLERANCES ±1° GEOMETRIC TOLERANCING PER ASME Y14.5-1994		DESCRIPTION:		INSTALLATION MG-509SSC		DRAWN BY: PM CHECKED BY: BF APPROVED BY: DV	
										DWG. SIZE: A1 SHEET: 1 OF 1 REV: -	