

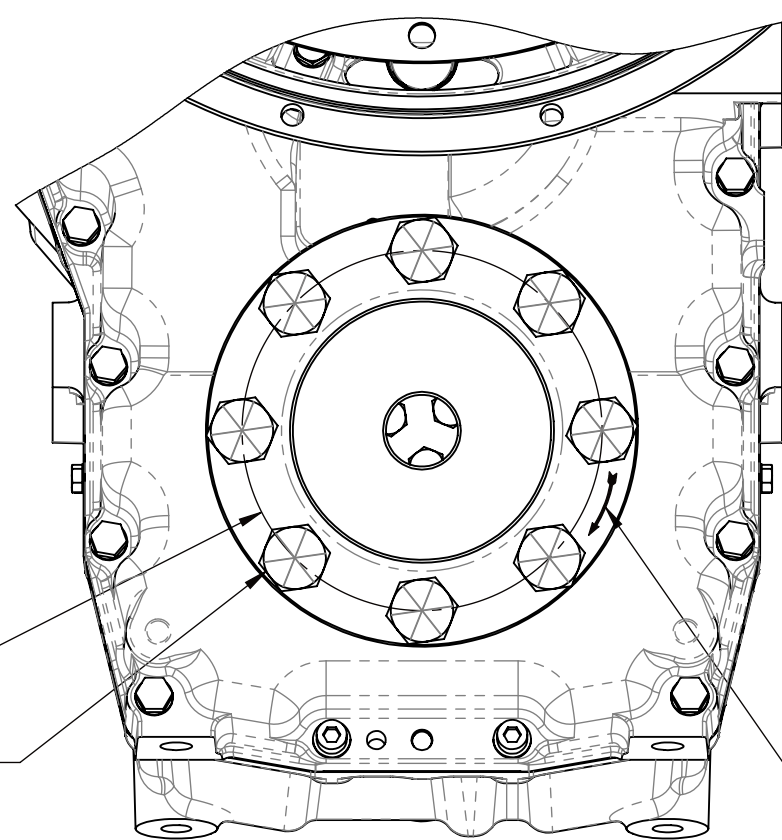


- NOTES:**
- A. REFERENCE S930 FOR TWIN DISC REQUIREMENT FOR PRESSURE AND TEMPERATURE ALARM LEVELS.
 - B. UNLESS OTHERWISE SPECIFIED FASTENER TORQUE VALUES PER S574 STANDARD.
 - C. ALL POINTS AVAILABLE FOR TESTING ARE CODED

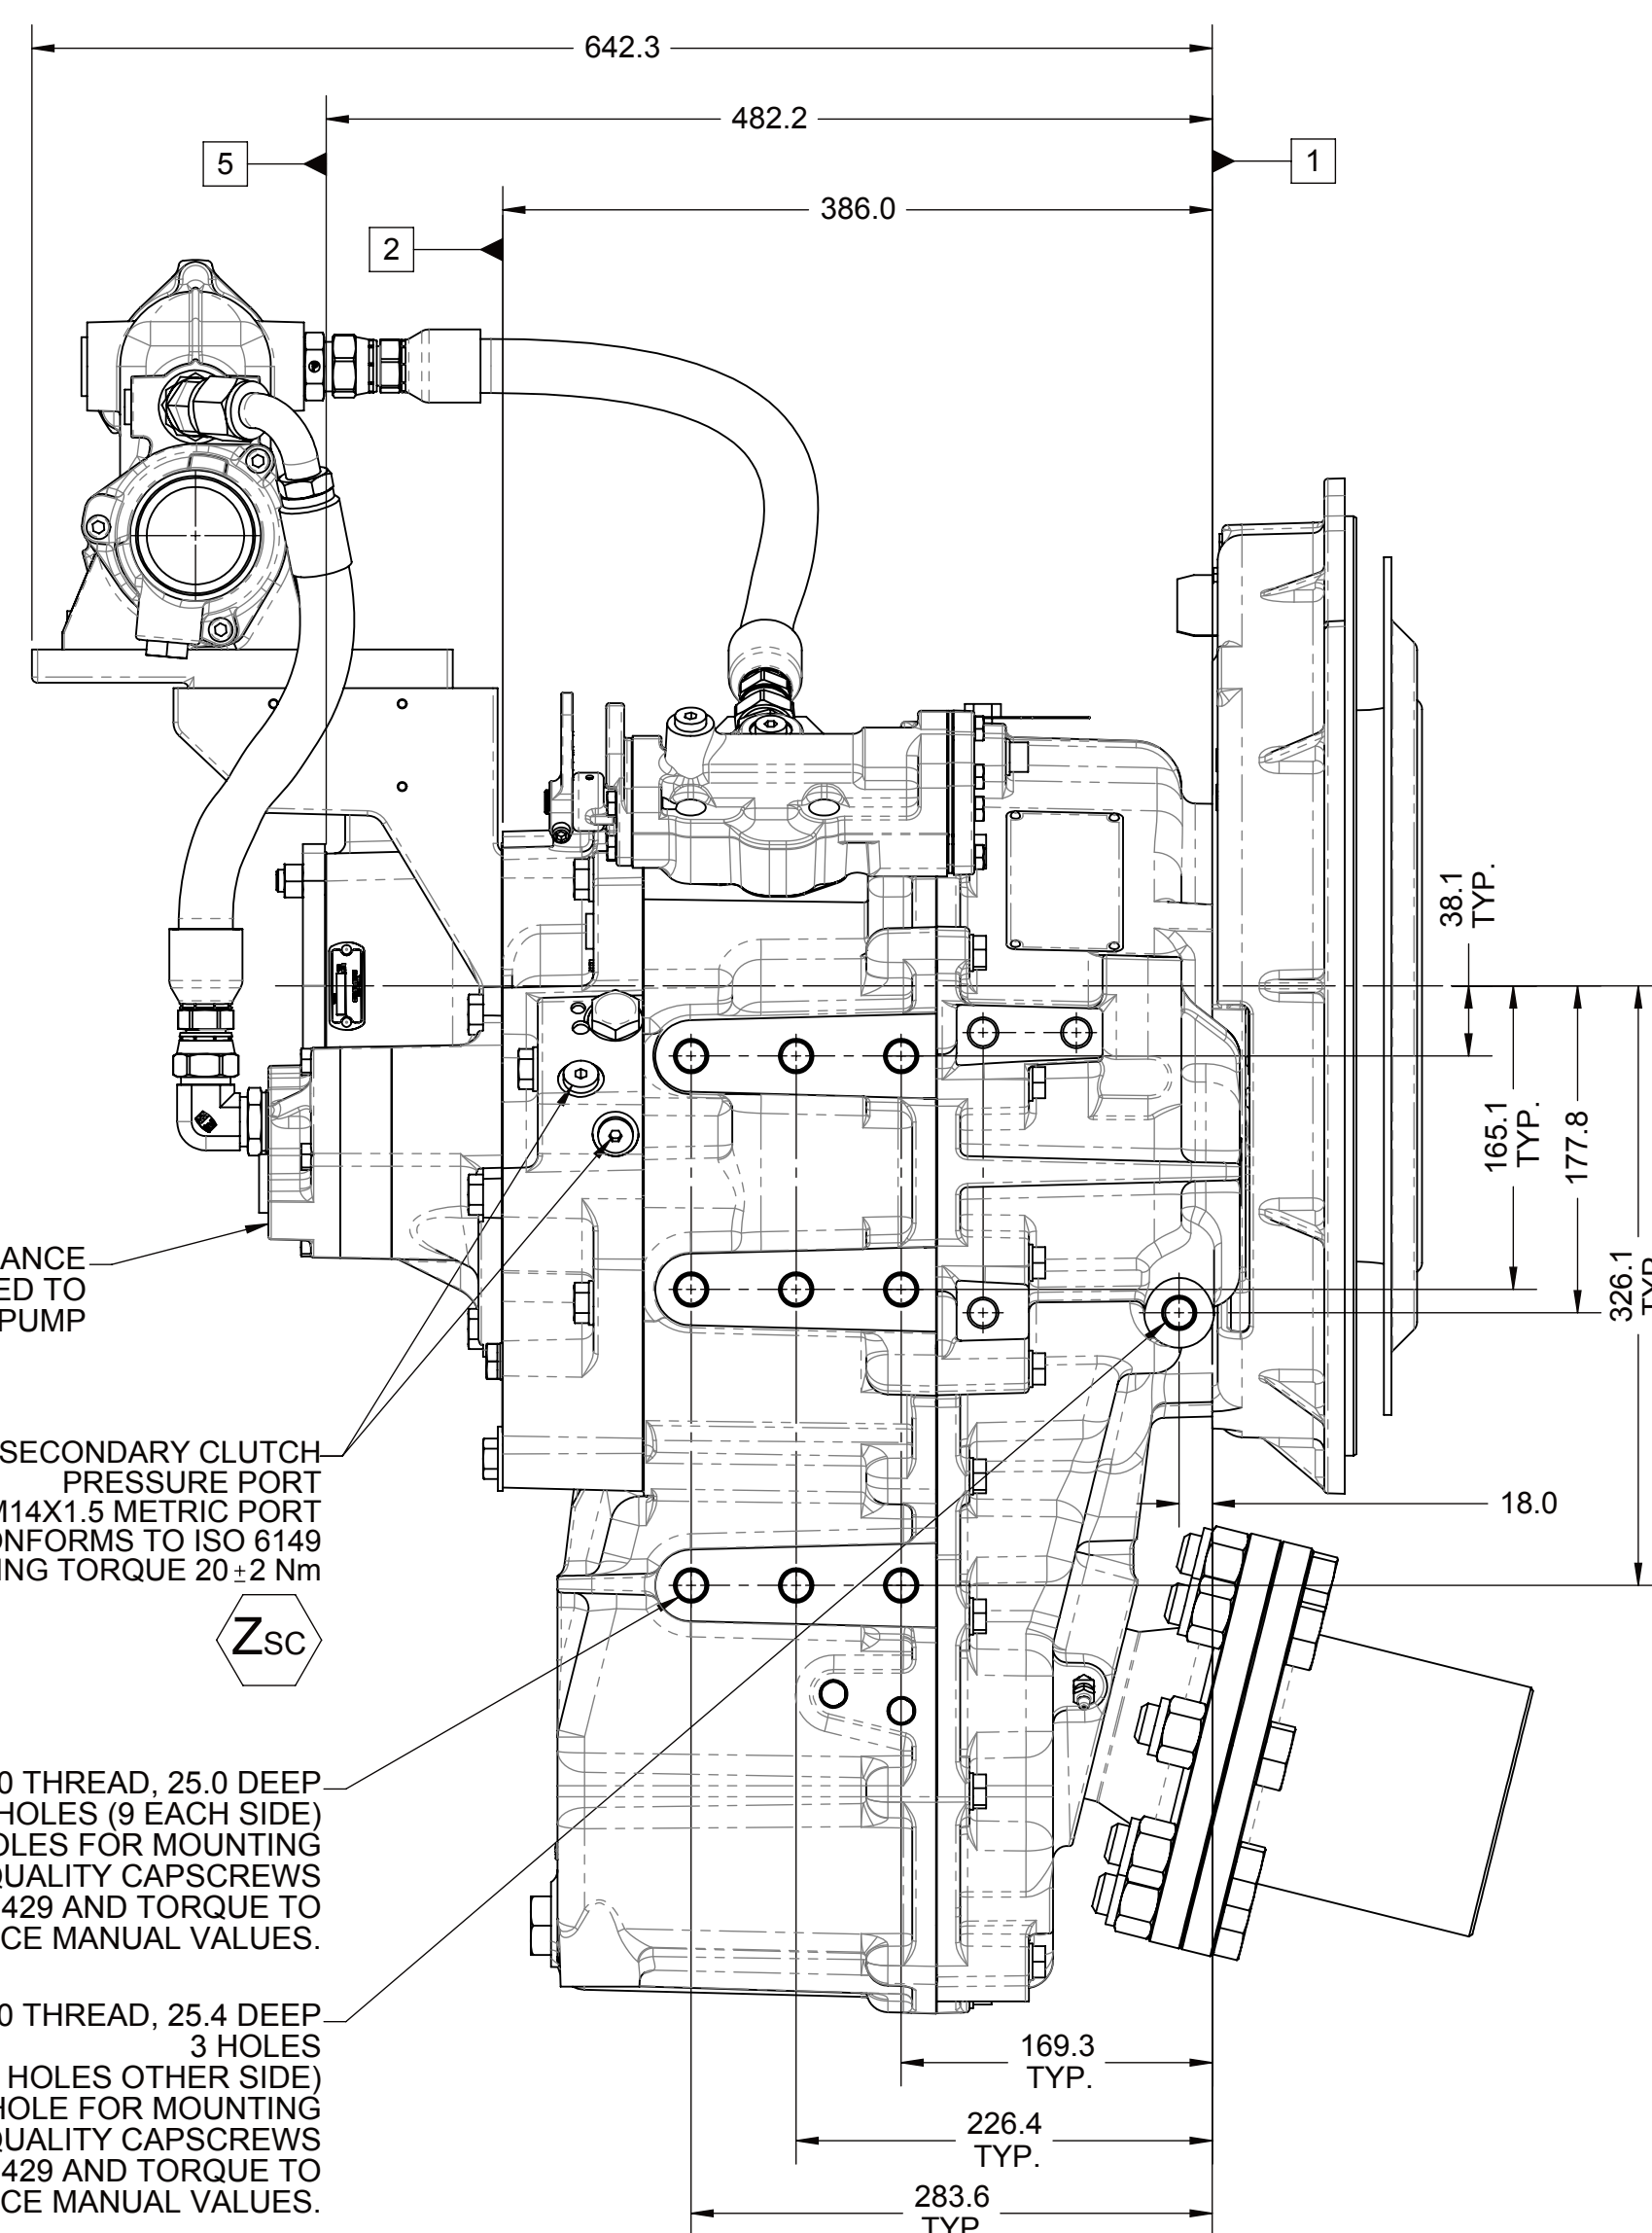

VIEW B-B

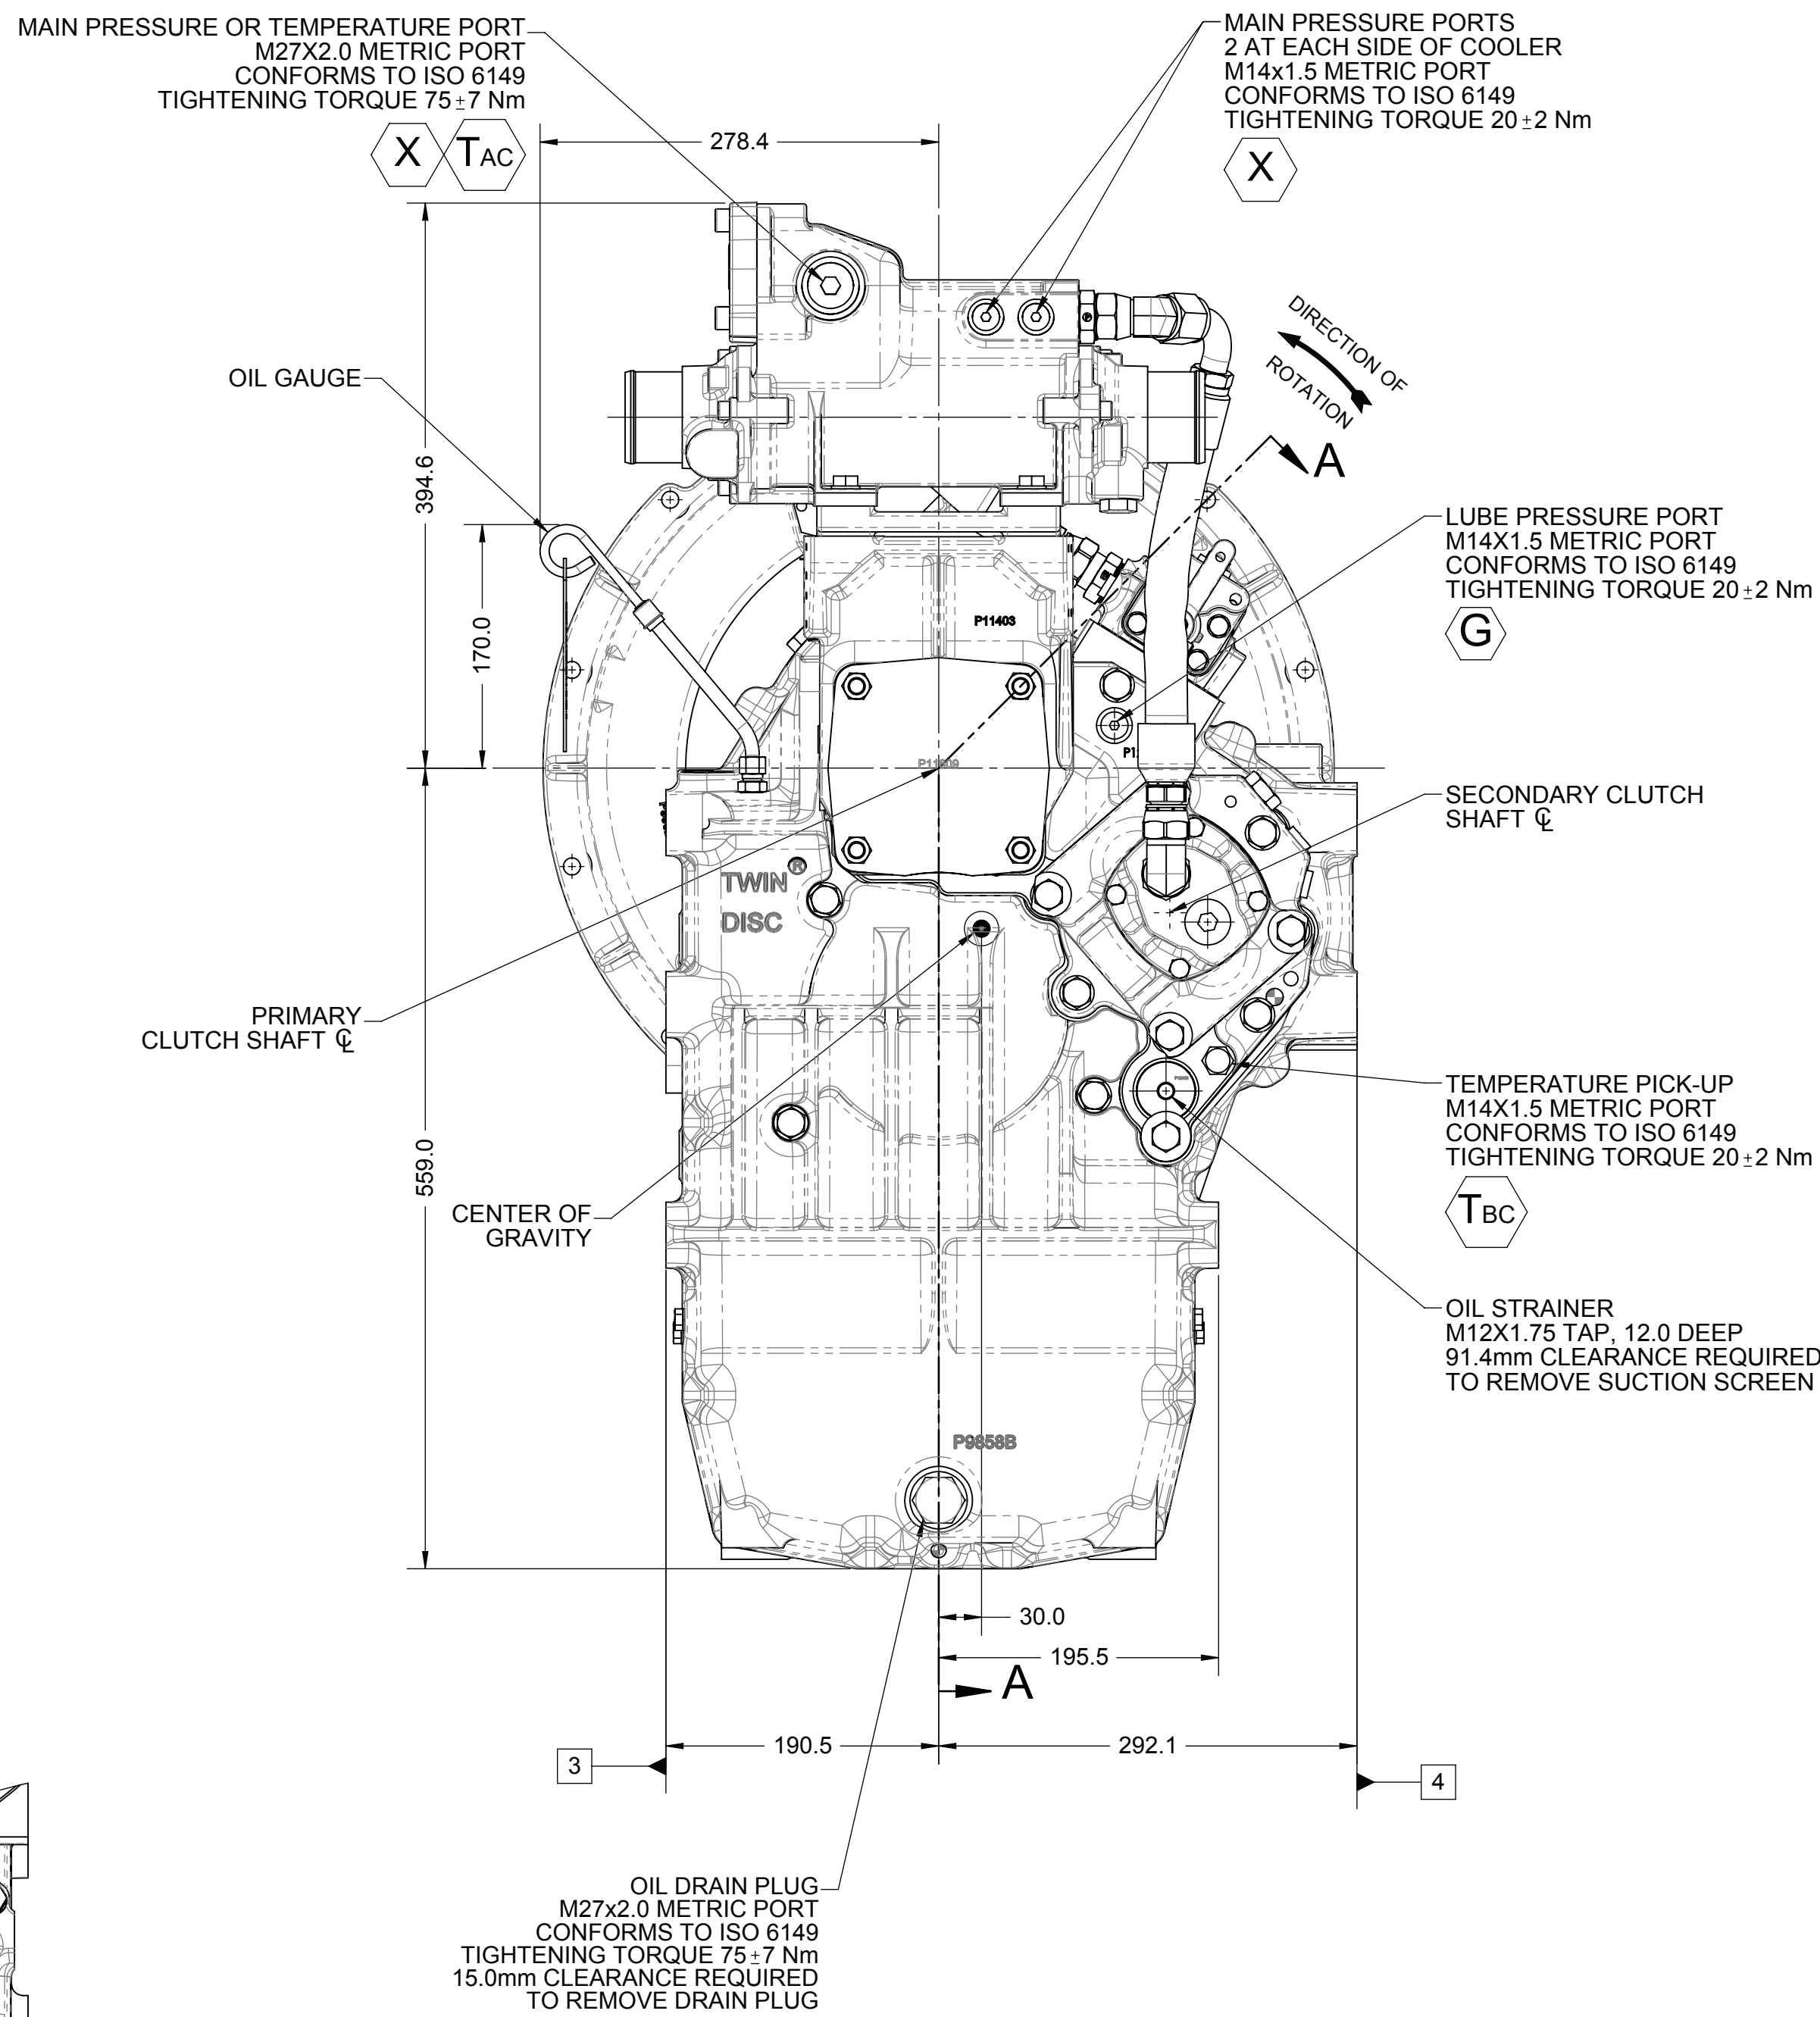

EQUIPMENT SHOWN:

- MG-5114IV PER PX13210 ASSEMBLY
- SAE #1/SAE 355 VULKAN VKE-4010 SERIES
- MECHANICAL CONTROL VALVE WITHOUT TROLLING
- SAE 127-4 PTO ADAPTER W/ HEAT EXCHANGER BRACKET
- PM13008 MOUNTED HEAT EXCHANGER GROUP
- XB5917 COMPANION FLANGE

FIRST USE ASSEMBLY: FIRST USE MODEL: SERIAL NO.:		HEAVT: 319.09 WEIGHT: 39.41		DATE: 07/23/2014	
 THIRD ANGLE PROJECTION		MATERIAL:		REV: NDWF-50315 10/31/2014 CHANGE NO. DATE	
UNLESS OTHERWISE SPECIFIED MATERIALS TO BE USED ARE:		HEAT TREAT:		TWIN DISC 	
METRIC NOTICE: THIS PRINT CONTAINS METRIC INFORMATION AND IS THE PROPERTY OF TWIN DISC, INCORPORATED. ALL RIGHTS ARE RESERVED. NO PART OF THIS PRINT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM TWIN DISC, INCORPORATED. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED BY CONTRAST.		DESCRIPTION:		DRAWN BY: PM CHECKED BY: PM APPROVED BY: DV	
ALL ANGLES ARE TO TOLERANCES ±1° UNLESS OTHERWISE SPECIFIED PER ASME Y14.5M		INSTALLATION MG-1141V		QUANTITY: A0 SHEET: 1 OF 1 REV: -	