


INCH
3/8-16 UNC-2B TH'D THRU
2 HOLES, 180° APART

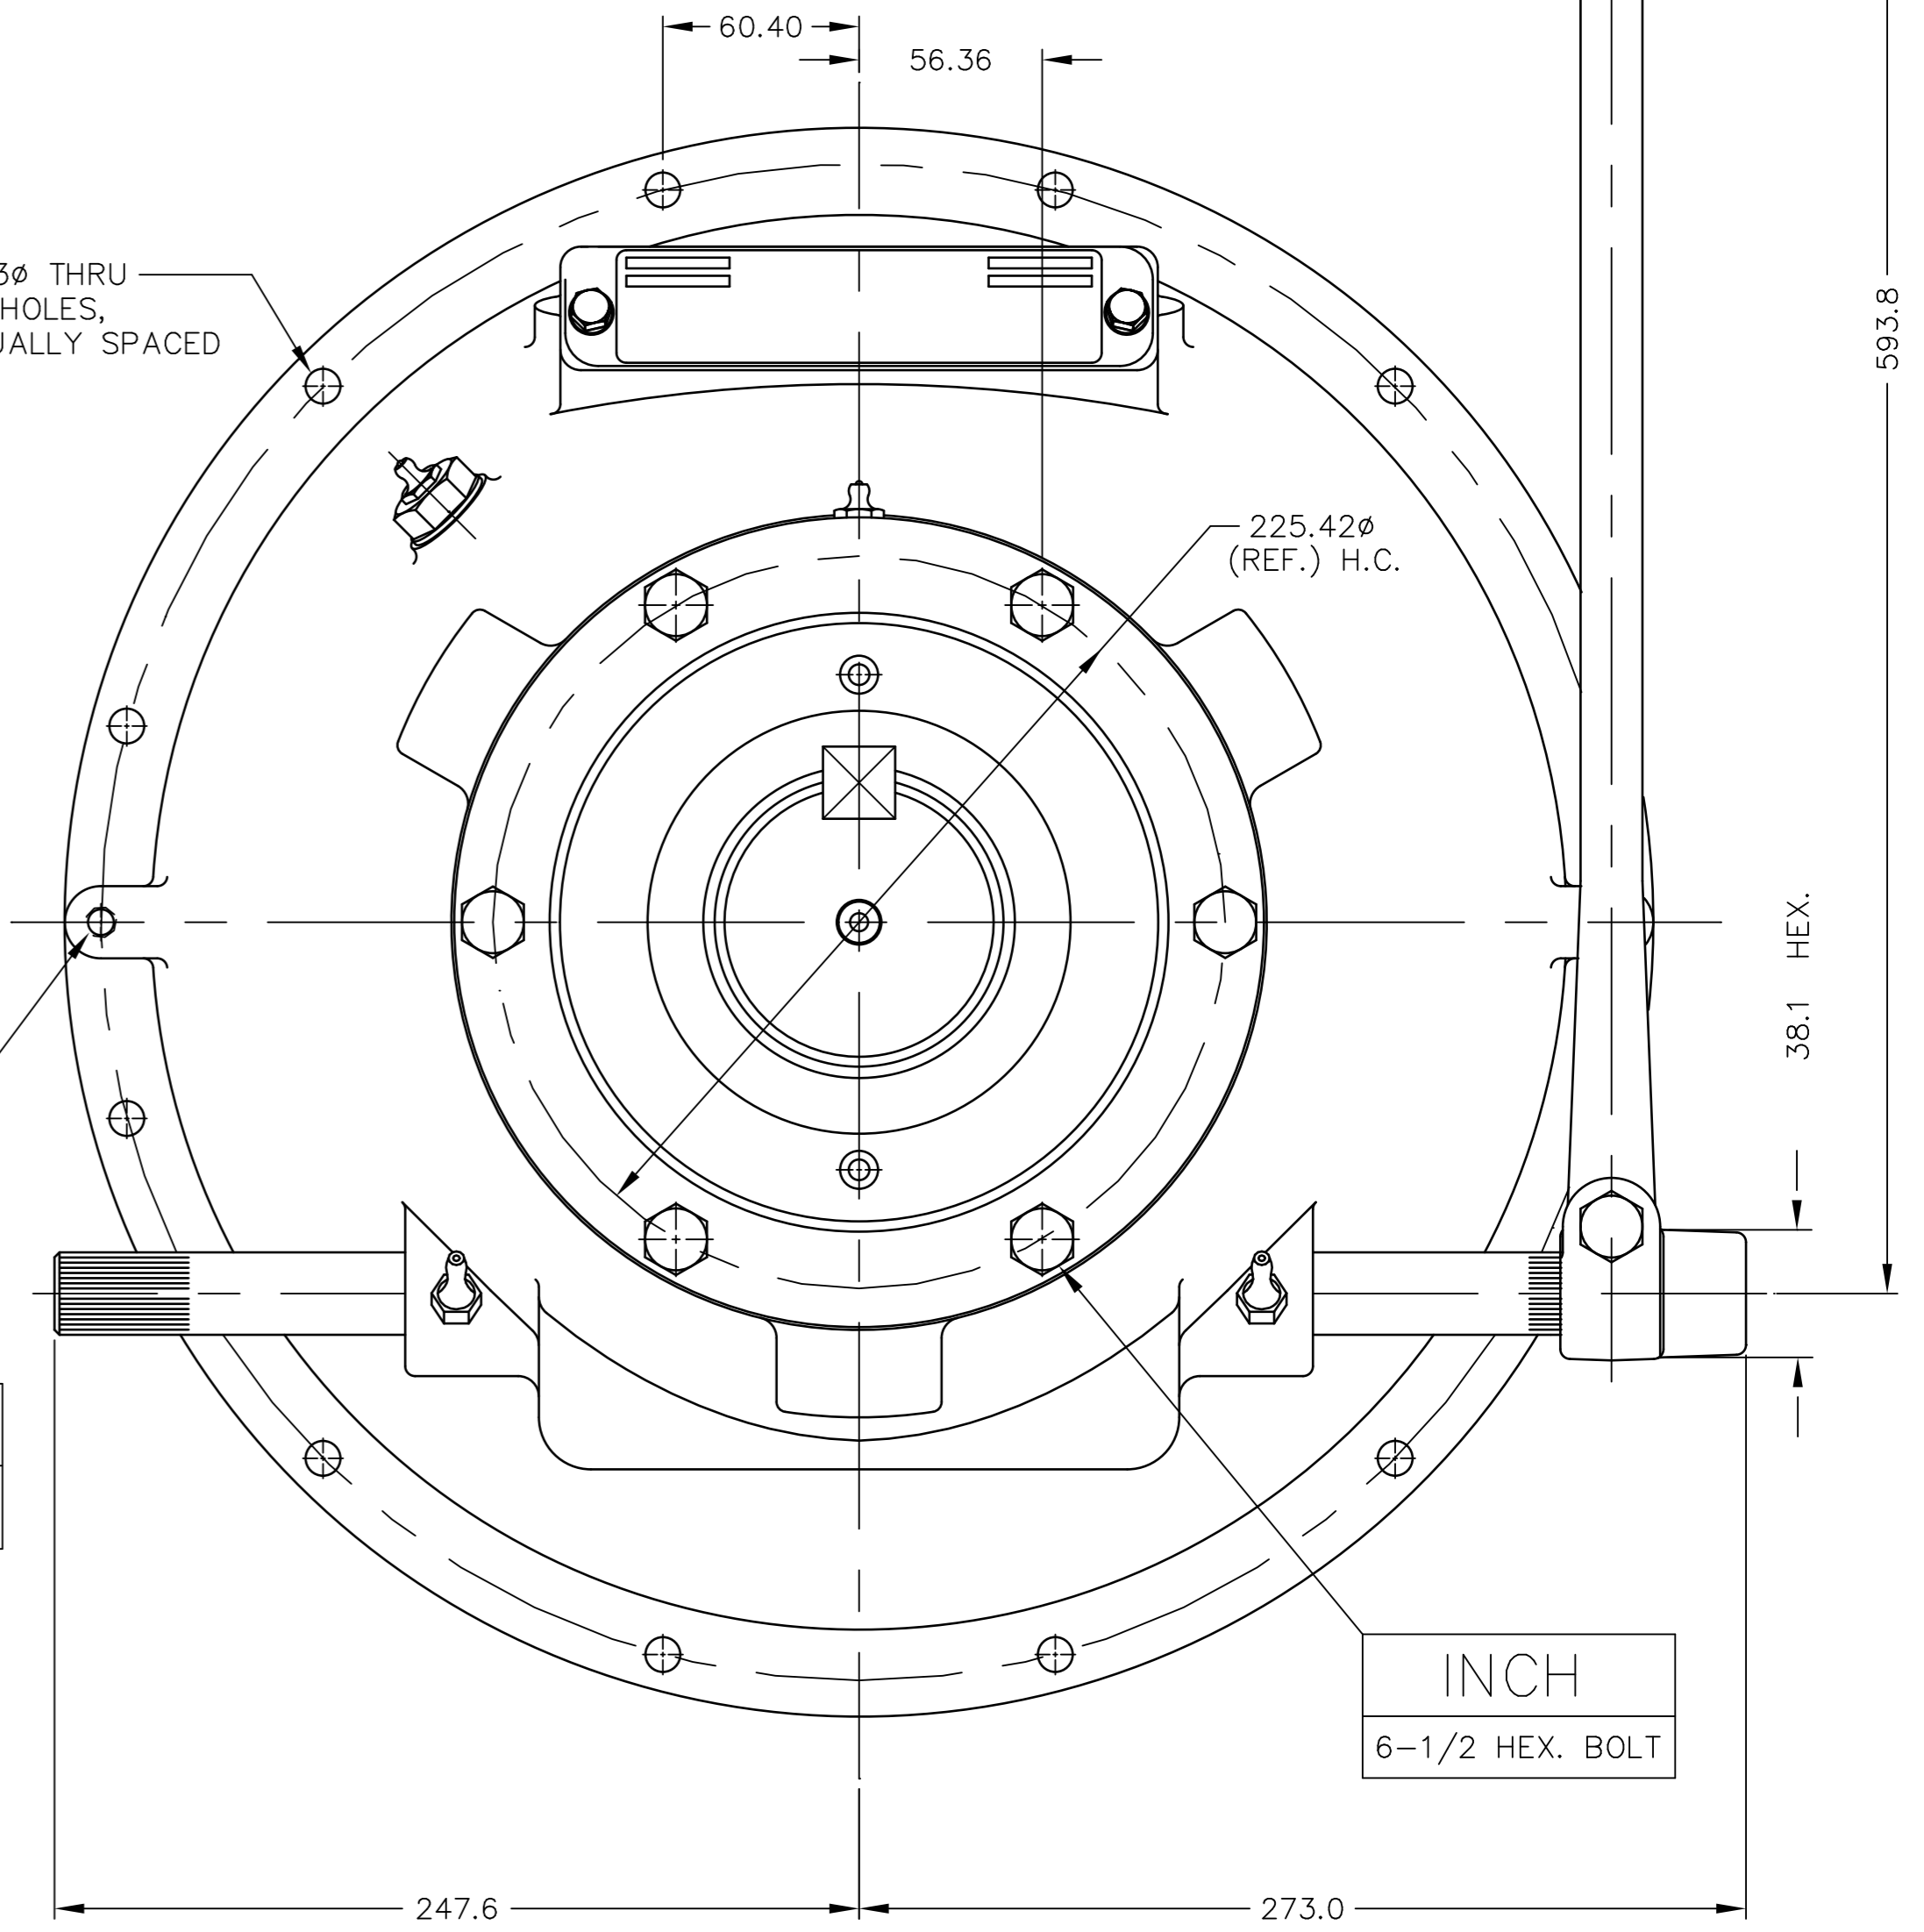

GENERAL NOTES:

- a.) REFER TO BOM LIST WHEN ORDERING PARTS.
- b.) REFER TO CARE & OPERATION MANUAL FOR ADDITIONAL INFO.
- c.) A SUPPORT PLATE MUST BE USED WHEN SIDE LOADS ARE APPLIED TO THE SHAFT.
- d.) FACE OF SAE HOUSING TO BOTTOM OF PILOT BORE IN FLYWHEEL.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm MACHINED DIMENSIONS X .75 X.X ± 0.25 X.XX ± 0.13 ALL ANGULAR TOLERANCES $\pm 1^\circ$ GEOMETRIC TOLERANCING	WEIGHT	WR ²	FIRST USE	METRIC	MATERIAL	HEAT TREAT	NAME	DATE	TWIN DISC INCORPORATED RACINE, WI 53403 - USA	
	kg	N.m ²	ASSY. SP311P202 MODEL SP311HP2					2/24/15		
NOTICE: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF TWIN DISC, INCORPORATE THIS NOTICE IS NOT INTENDED TO NULLIFY OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.				THIRD ANGLE PROJECTION	SIMILAR TO		SP311P2 PTO	SCALE .50 = 1	SP311P202	
								DRN. J.R.		A1 SHT. 2 OF 2 REV -
								CHK. JEL		
								APPD. DAJ		