
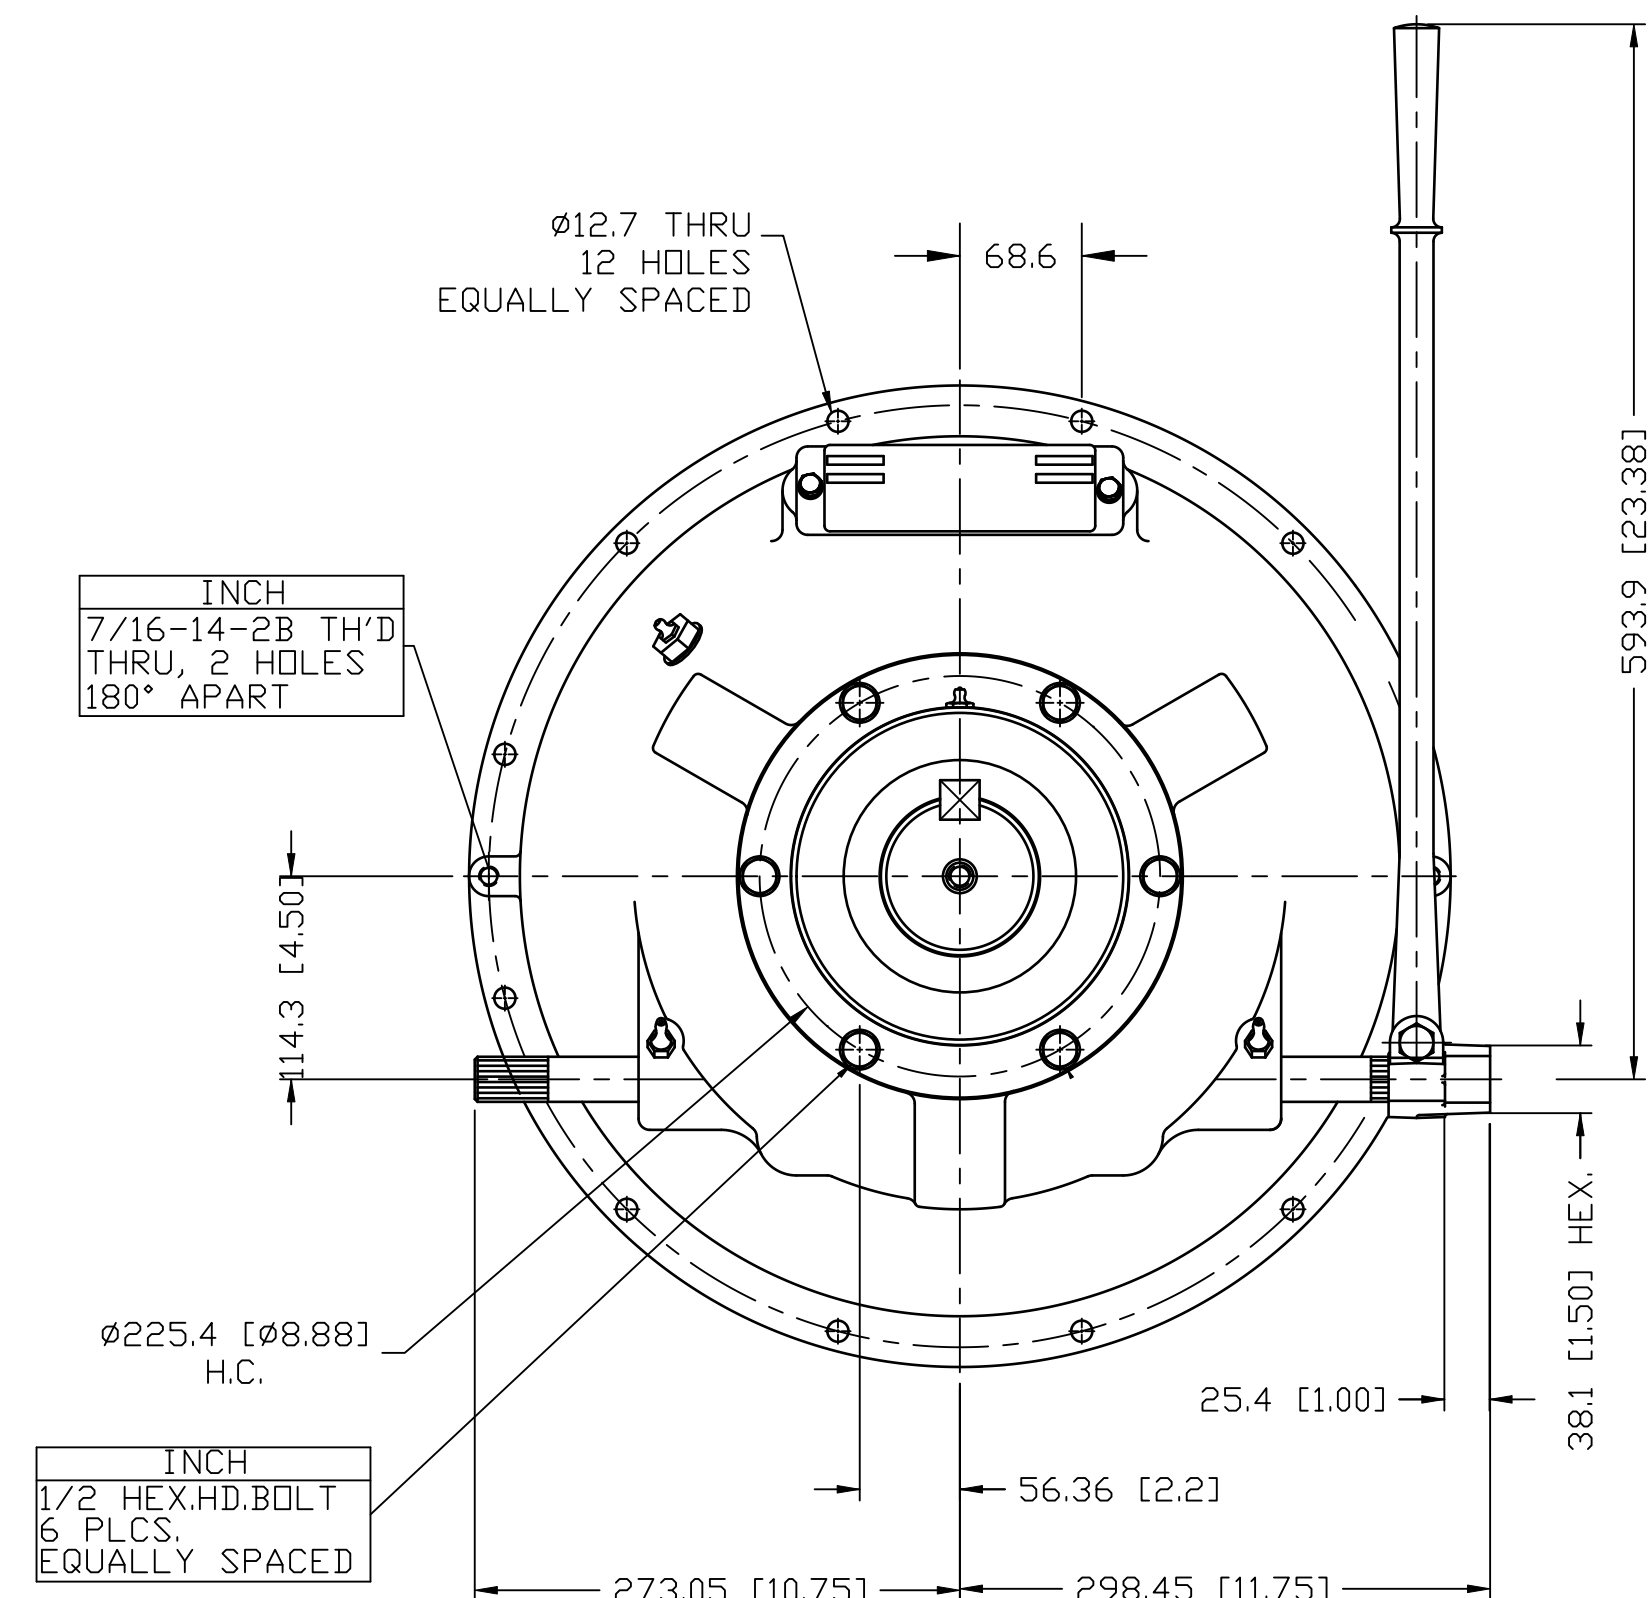


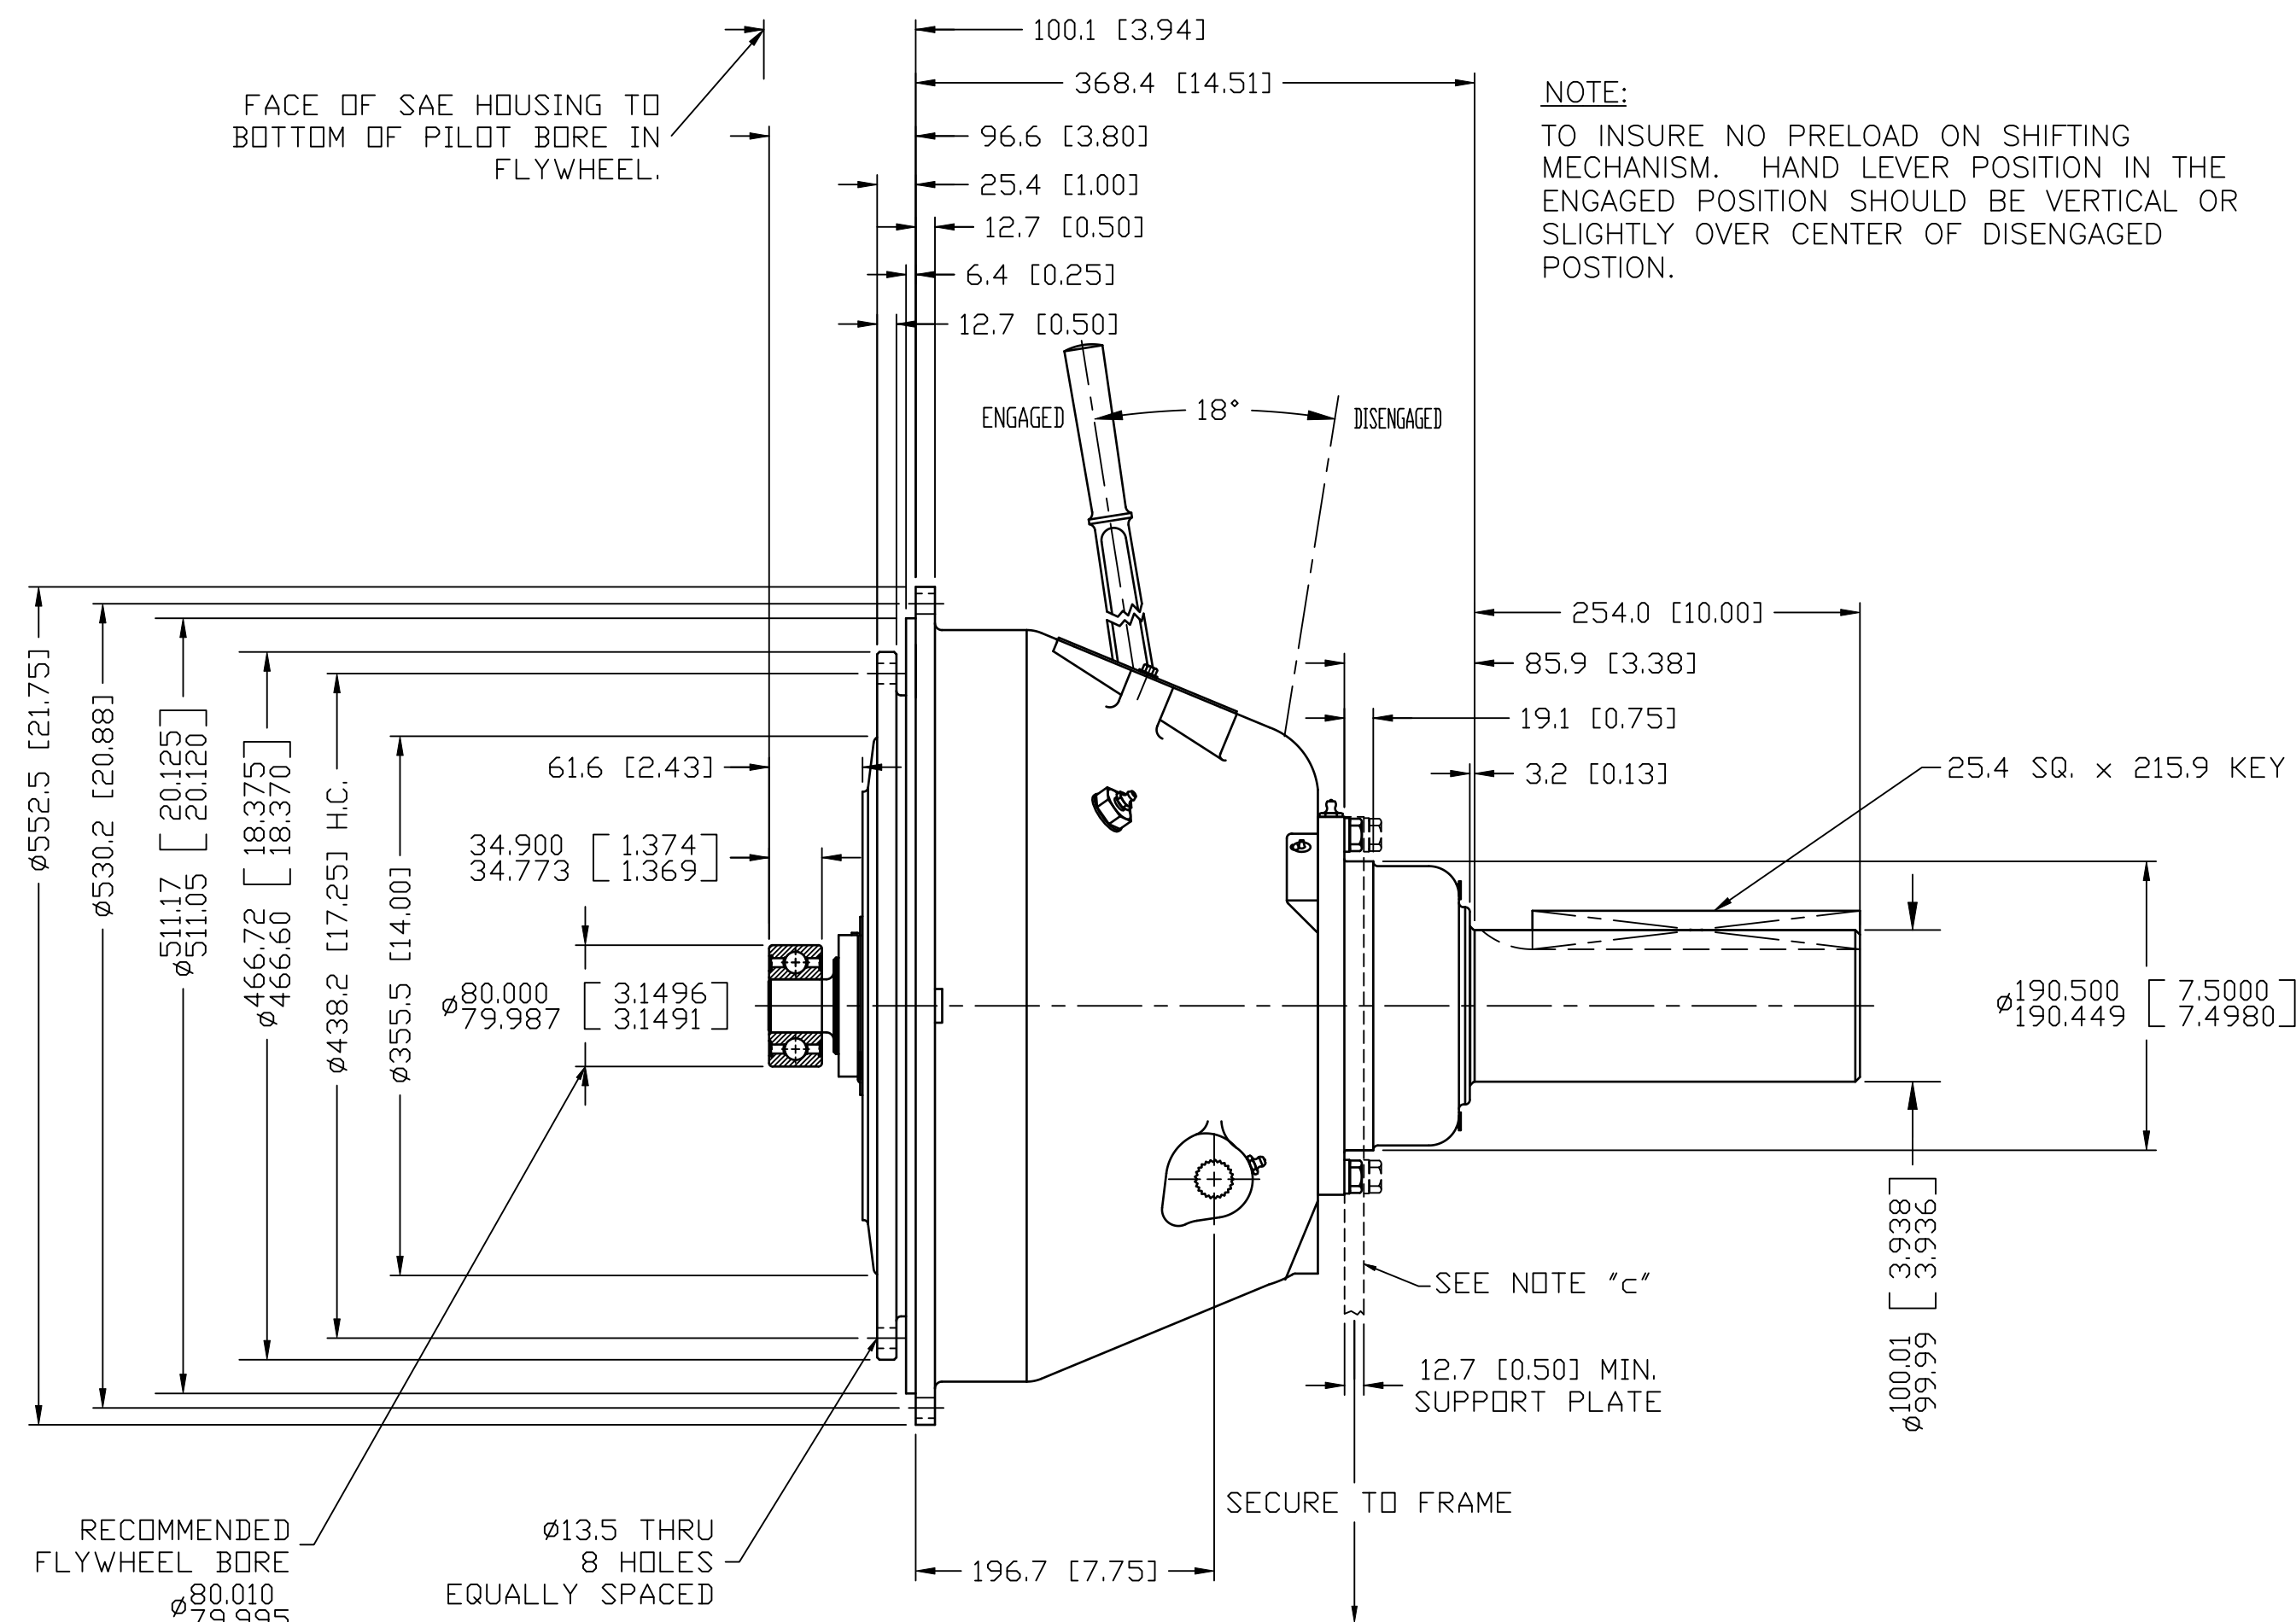

GENERAL NOTES:

- REFER TO BILL OF MATERIALS LIST WHEN ORDERING PARTS.
- REFER TO CARE & OP. MANUAL FOR ADDITIONAL INFO.
- INSTALLER SUPPLIED SUPPORT PLATE MUST BE USED.
- REFER TO TWIN DISC STANDARD S364R FOR COLLAR SERVICE AND MAINTAINANCE LUBRICATION PROCEDURE

NOTES:

DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY

Ⓐ OBSOLETE FOR PRODUCTION. REPLACED BY PX1039956D FOR SERVICE PER ECNWF-101274

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN
MILLIMETERS
X.XX ±0.25
X.XXX ±0.13
ALL ANGULAR TOLERANCES ±1°
GEOMETRIC TOLERANCING
PER ASME Y14.5M 1994

WEIGHT
- kg

VR²
N.m

FIRST USE
ASSY. I
MODEL I
NOTICE: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER BETRIMENTAL TO THE INTEREST OF TWIN DISC, INCORPORATED
THIS NOTICE IS NOT INTENDED TO NULLIFY OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.

METRIC
THIRD ANGLE
PROJECTION

MATERIAL
SIMILAR TO
SP314P126

HEAT TREAT
NAME
SP314P1
POWER TAKE-OFF

DATE
22 DEC 2017
SCALE
.25:1
DRN.
ES
CHK.
DAJ
APP'D.
DAJ

TWIN DISC
INCORPORATED
RACINE, WI 53403 - USA
SP314P140
DWG
SIZE A1
SHT.
2 OF 2
REV
A