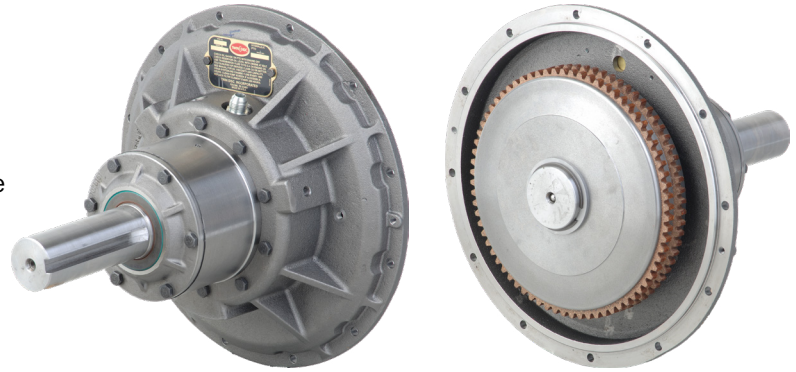


RC PTO**RC211P • RC311P**

The RC is a series of hydraulically-actuated, dry-clutch power take-offs. A key design feature allows for installation in applications where the PTO may otherwise be difficult to service. An advanced control system can be used for “soft-starting” large inertia loads.

**FEATURES**

- Hydraulically actuated
- Self-adjusting clutch
- Oil-lubricated, spherical and cylindrical roller main bearings
- No pilot bearing required
- Advanced controls for high inertia loads
- Optional sintered iron and composite plates
- Suitable for side load and in-line applications
- Hydraulic valve and display options


SPECIFICATIONS

Model Number	SAE Housing	Max. Input Torque Nm (lb-ft)		Clutch Maximum Power Rating kW (hp)			Maximum Safe Speed rpm		Weight kg (lbs)
							Solid Plates	Split Plates	
		Organic	Sintered	Class II	Class III	Class IV	Nodular Drive Ring		
RC211P	2, 3	1232 (909)	1540 (1136)	184 (247)	123 (165)	92 (124)	3500	3000	141 (311)
RC311P	2, 3	2196 (1620)	N/A	277 (371)	184 (247)	157 (186)	3000	N/A	158 (348)

DIMENSIONS – RC211 & RC311



	RC211P	RC311P
SAE J617 Housing Size	2, 3	
SAE J620 Clutch Size	11"	
“A”	547.6 (21.56)	577.6 (22.74)
“B”	88.9 (3.50)	
“C”	256.20 (10.09)	
“D”	222.30 (8.75)	

Dimensions are in mm [in]

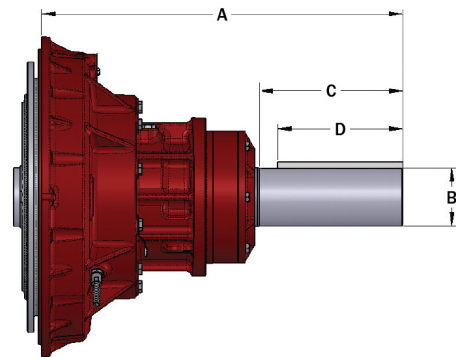

Since 1918, we've been putting horsepower to work by designing, engineering and manufacturing rugged-duty industrial products. Our products and our reputation are bolted to the most renowned engine manufacturers and equipment OEMs in the world. Our mission is to make boats, machines and off-highway vehicles more productive, more durable, more operator-friendly, and more cost-effective. From design and installation consultation through after-sale support, Twin Disc and its distributors are committed to your business. No one knows more about managing horsepower in more ways than Twin Disc.

- POWER-SHIFT TRANSMISSIONS
- TORQUE CONVERTERS
- ELECTRONIC CONTROL SYSTEMS
- POWER TAKE-OFFS
- PUMP DRIVES
- CLUTCHES
- GEARBOXES
- UNIVERSAL CONTROL DRIVES

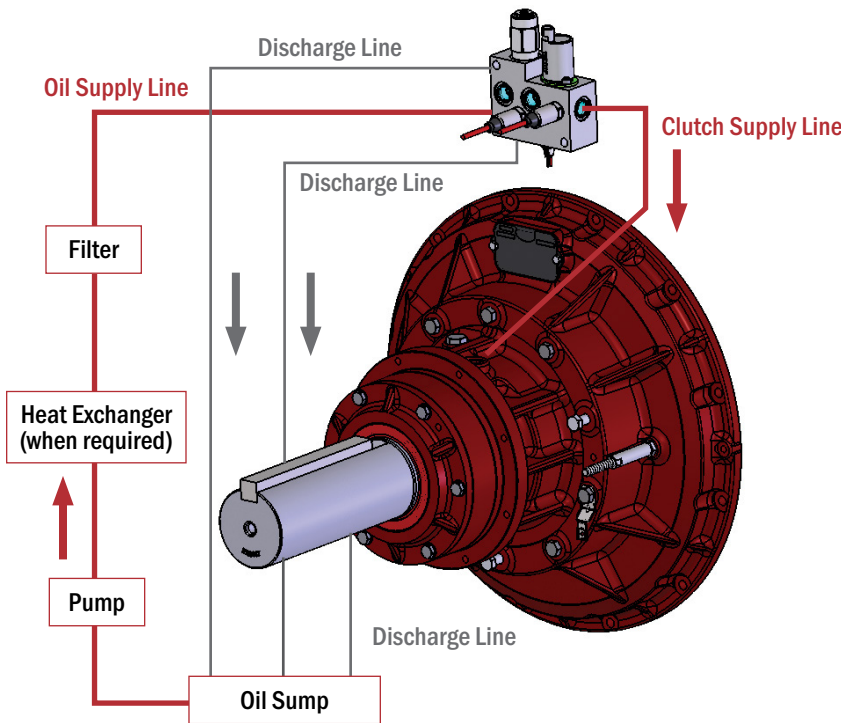

RC211P & RC311P ALLOWABLE SIDE LOAD, KG (LBS)

RPM	X Distance (mm)								
	25.4 (1.0)	50.8 (2.0)	76.2 (3.0)	101.6 (4.0)	127 (5.0)	152.4 (6.0)	177.8 (7.0)	203.2 (8.0)	228.6 (9.0)
1000	2709 (5972)	2437 (5372)	2215 (4882)	2029 (4474)	1873 (4129)	1739 (3833)	1623 (3577)	1521 (3353)	1431 (3155)
1500	2398 (5288)	2158 (4757)	1961 (4323)	1797 (3962)	1658 (3656)	1540 (3394)	1437 (3167)	1347 (2969)	1267 (2794)
2000	2200 (4851)	1979 (4364)	1799 (3966)	1648 (3634)	1521 (3354)	1412 (3114)	1318 (2905)	1235 (2723)	1163 (2563)
2200	2138 (4714)	1924 (4241)	1748 (3854)	1602 (3532)	1478 (3259)	1372 (3026)	1281 (2824)	1201 (2647)	1130 (2491)
2500	2058 (4536)	1851 (4081)	1682 (3709)	1542 (3399)	1423 (3137)	1321 (2912)	1233 (2717)	1155 (2547)	1087 (2397)

Twin Disc, Incorporated reminds users of these products that their safe operation depends on use in compliance with engineering information provided in our catalog. Users are also reminded that safe operation depends on proper installation, operation and routine maintenance and inspection under prevailing conditions. It is the responsibility of users (and not Twin Disc, Incorporated) to provide and install guards or safety devices which may be required by recognized safety standards or by the Occupational Safety and Health Act of 1970 and its subsequent provisions.



Click here to opt in and receive the latest Twin Disc updates

Twin Disc, Incorporated
Milwaukee, WI 53202 USA
Phone +1 (262) 638-4000
TWINDISC.COM