

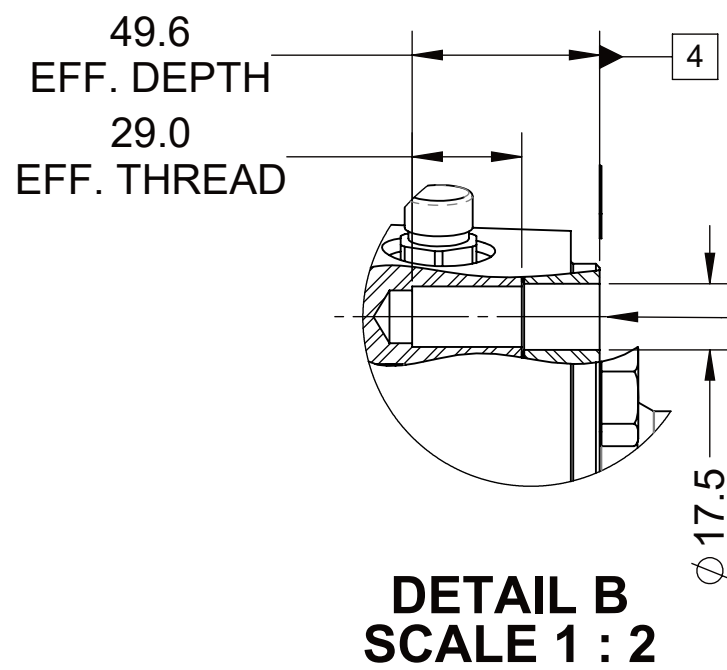
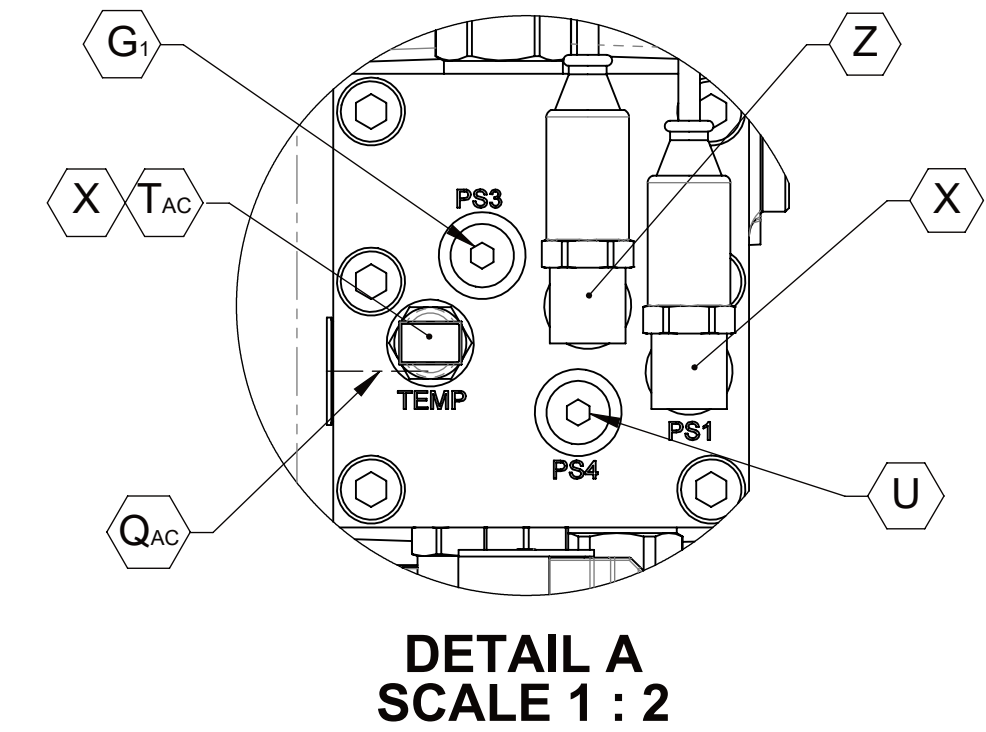
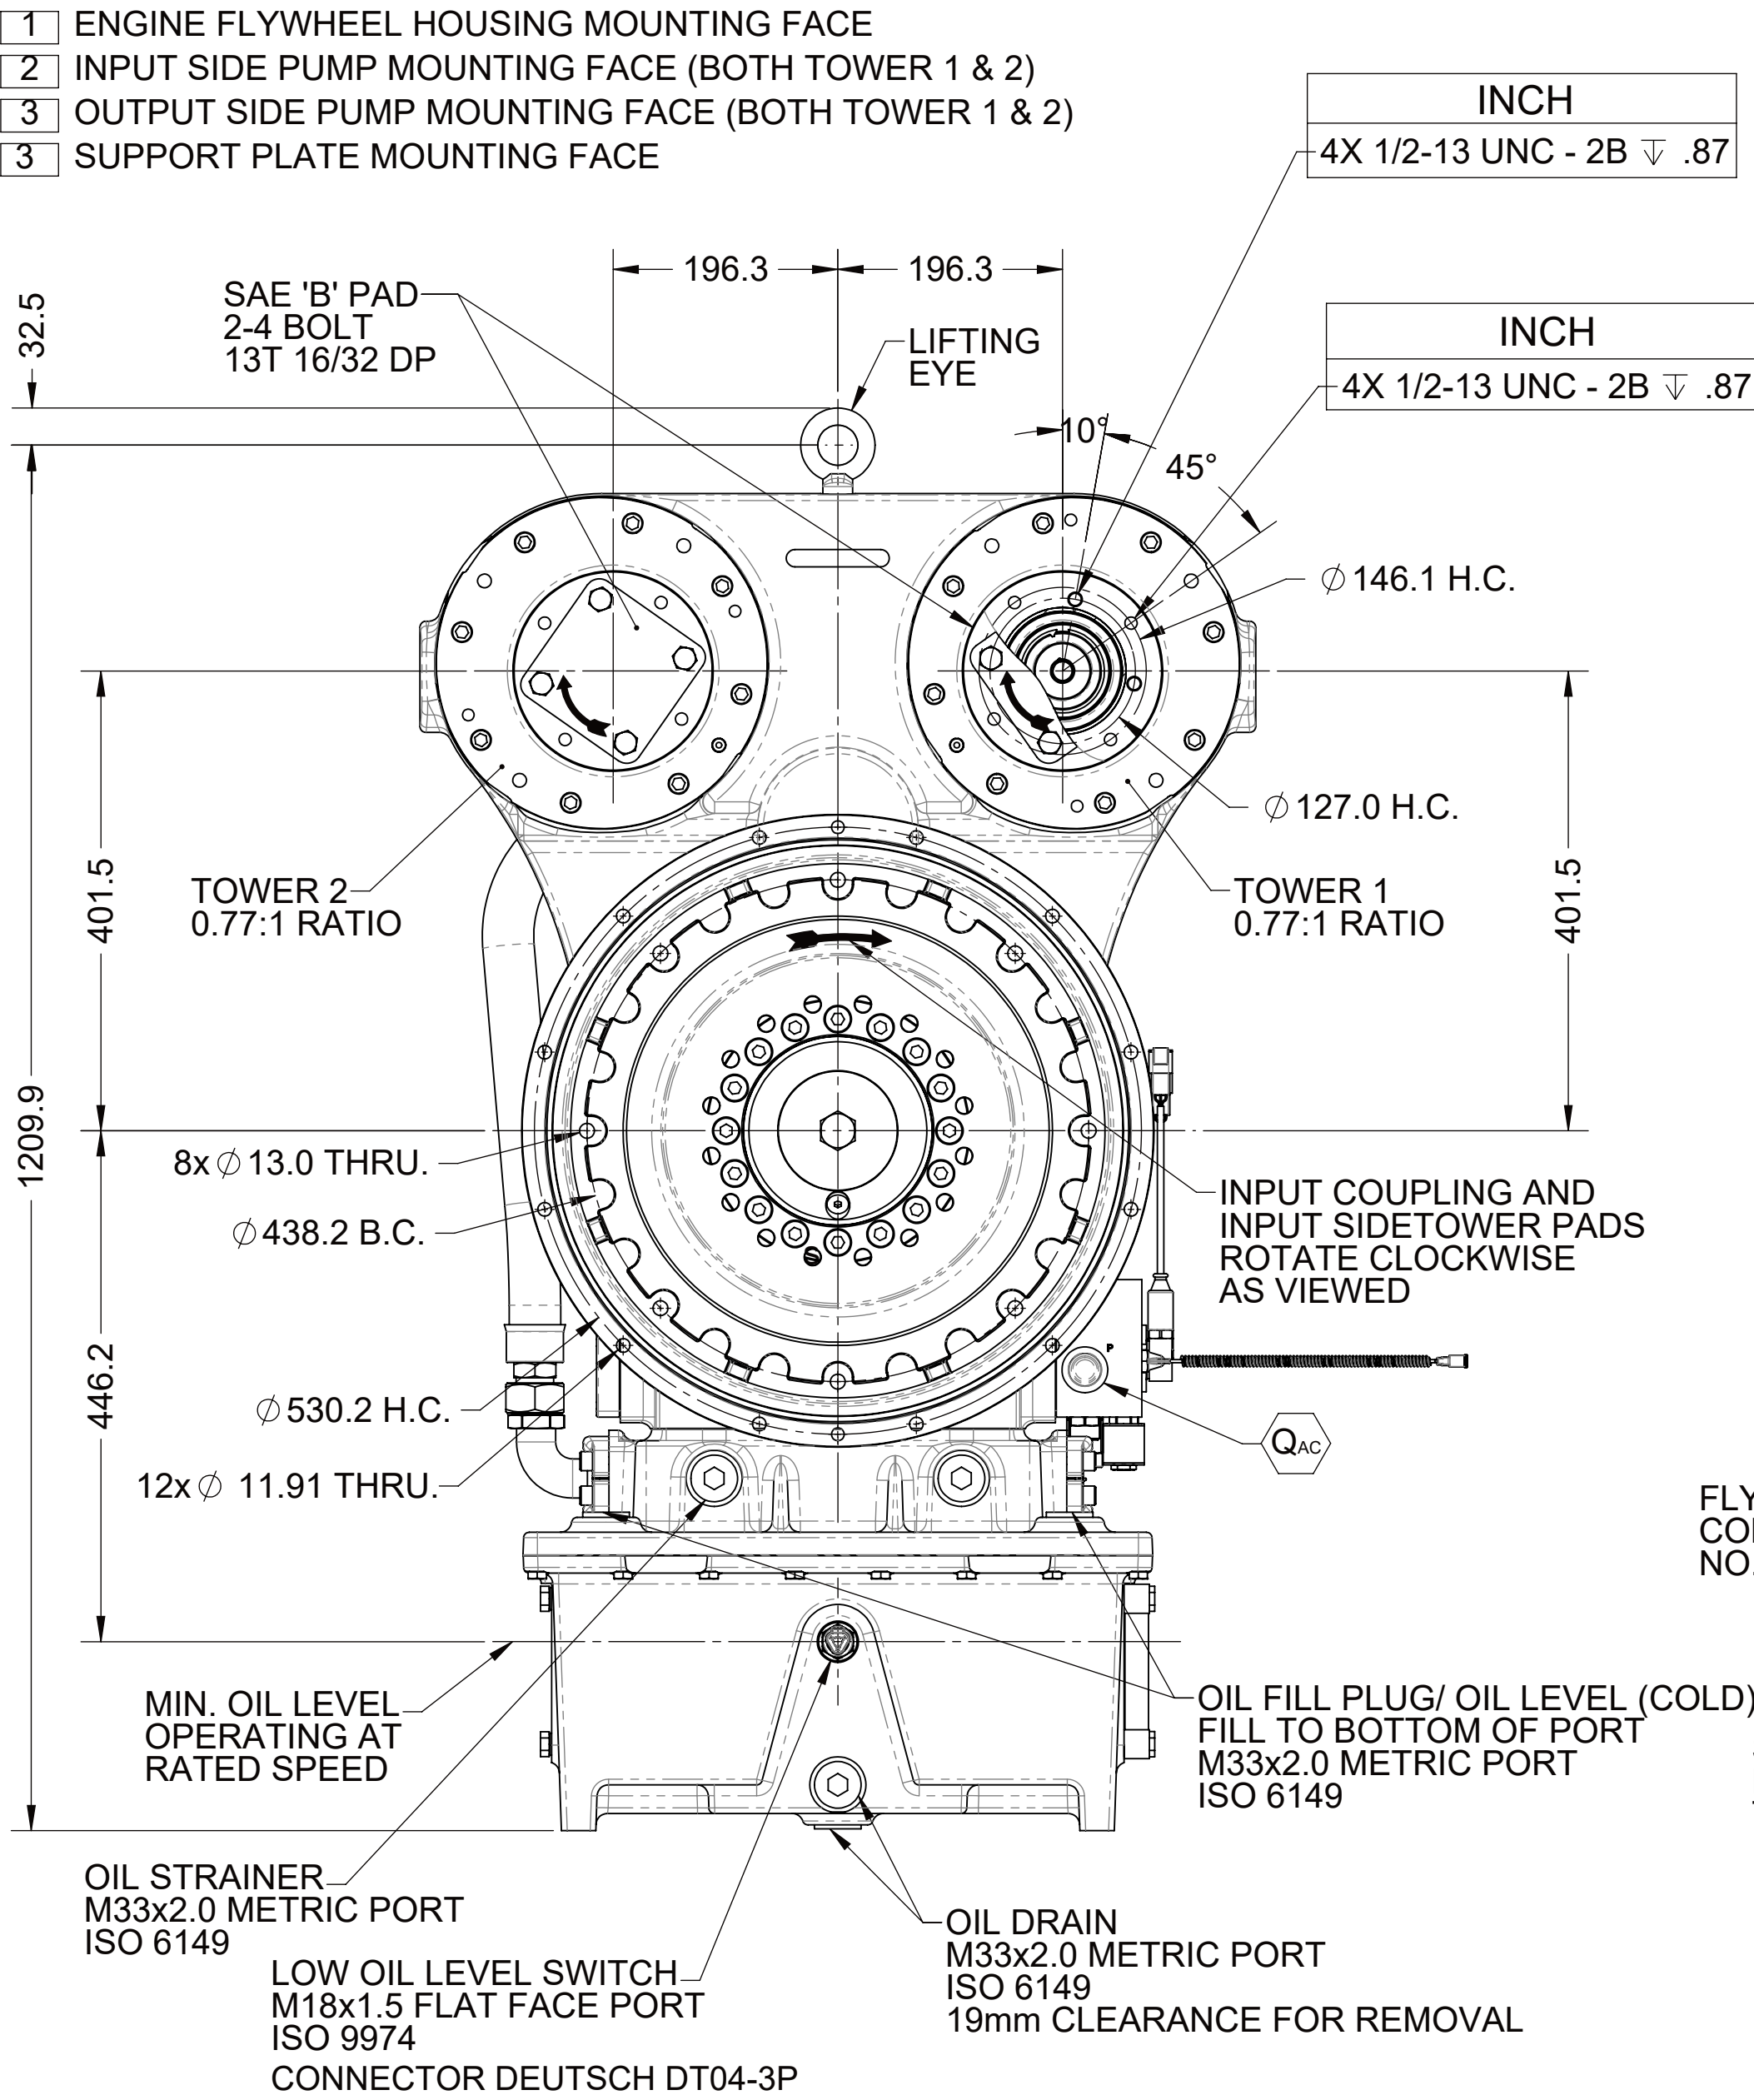
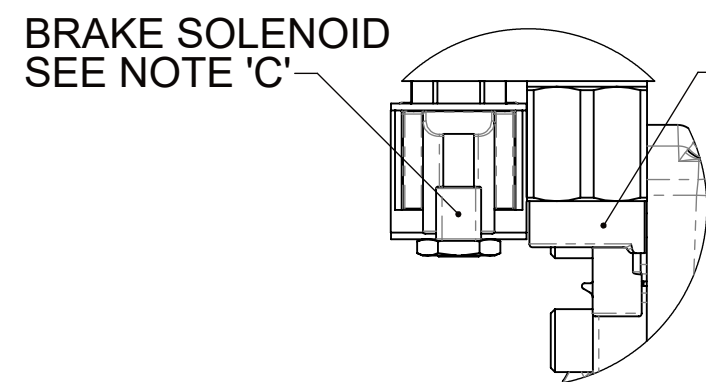
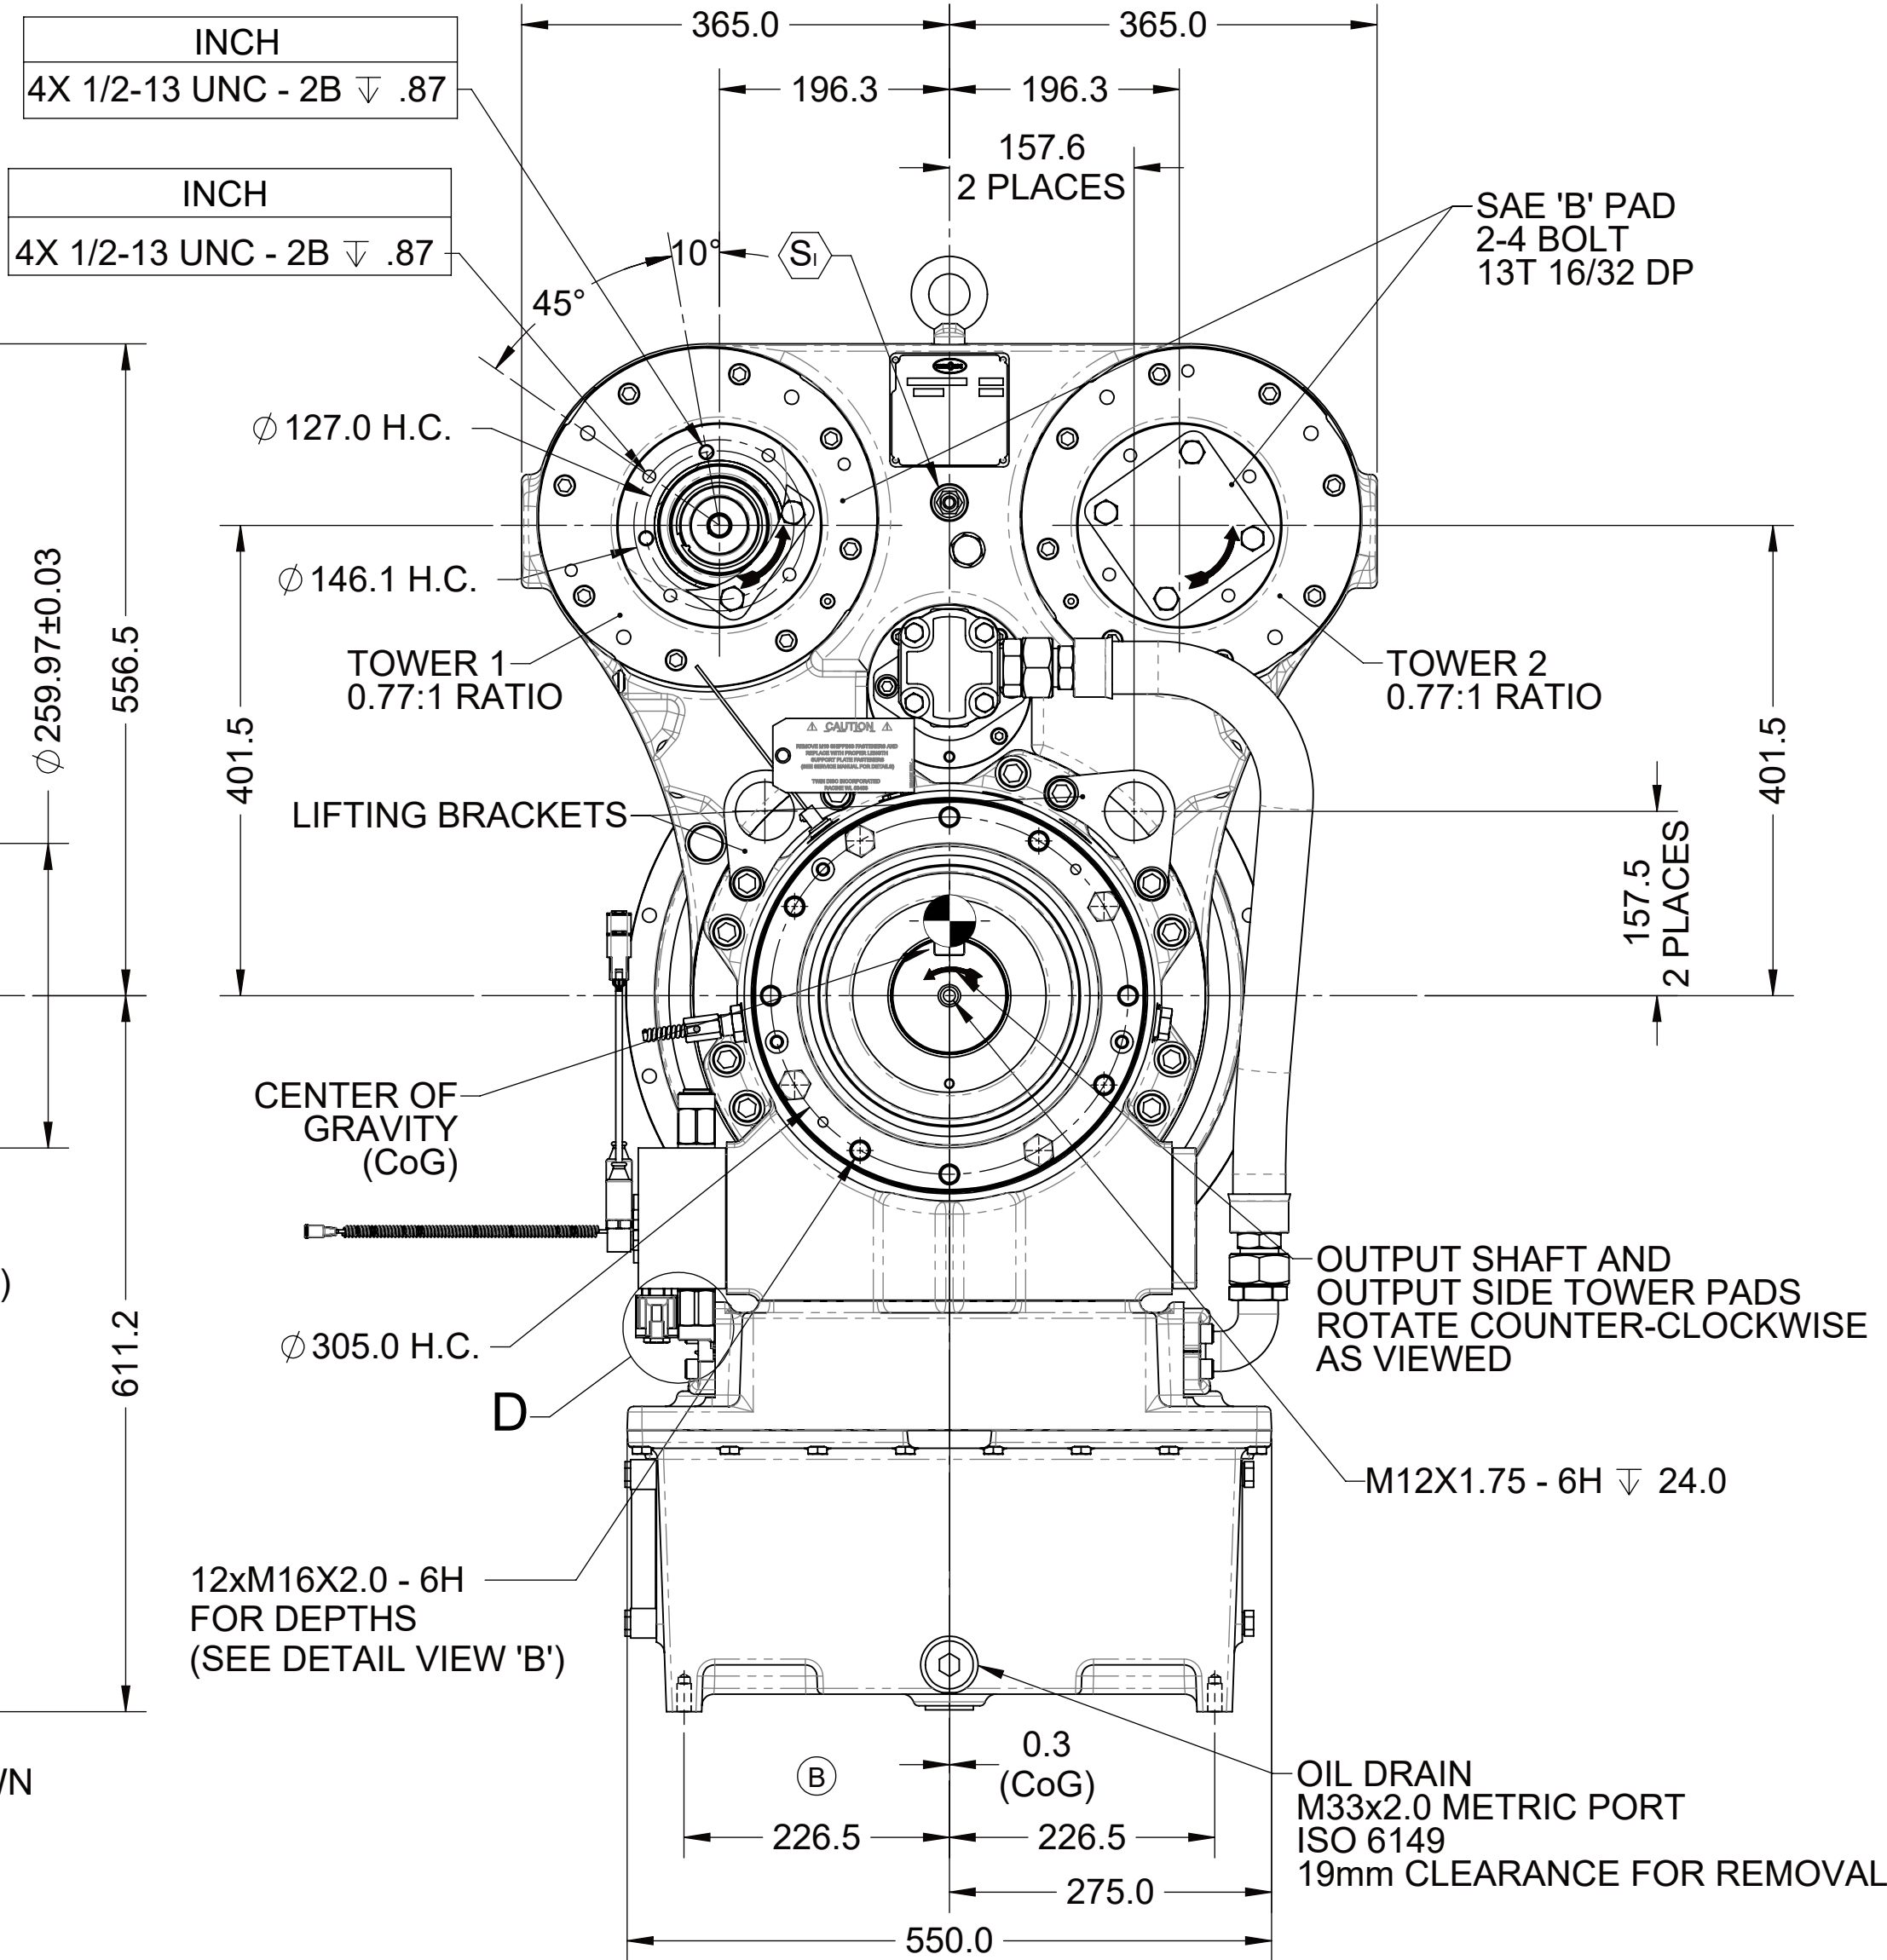


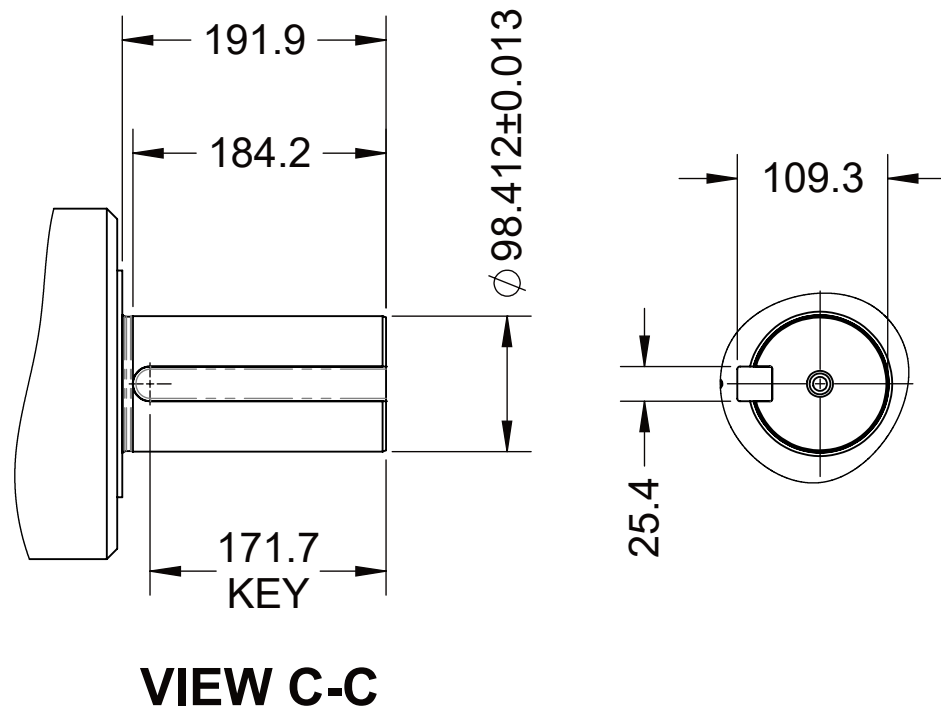


IMPORTANT:
- ALL BOLT HOLES MUST BE USED FOR
MOUNTING SUPPORT PLATE
- USE PROPERTY CLASS 10.9 FASTENERS

NOTES:

- A. MANUAL BRAKE RELEASE:
SEE DETAIL 'E'.
- B. MANUAL BRAKE RELEASE SWITCH:
SWITCH IS NORMALLY CLOSED
WHEN MANUAL BRAKE RELEASE IS 'ENGAGED'
- C. PROPORTIONAL CONTROL VALVE AND SOLENOID OPERATION:
1. WARNING DO NOT CONNECT VALVE COIL DIRECTLY TO
BATTERY/ POWER SUPPLY VOLTAGE.
2. OPERATION TO BE PERFORMED WITH ONLY TWIN DISC
CONTROL SYSTEMS OR MODULES
- D. ALL POINTS AVAILABLE FOR TESTING ARE CODED
- E. ALL PLUGS AND TEST PORTS TO BE
TORQUED PER S574 O-RING PORT SPECIFICATIONS
(SEE OWNER'S MANUAL)
- F. REFER TO MANUAL FOR RECOMMENDED OIL, CHECKING, AND
MAINTENANCE PROCEDURES

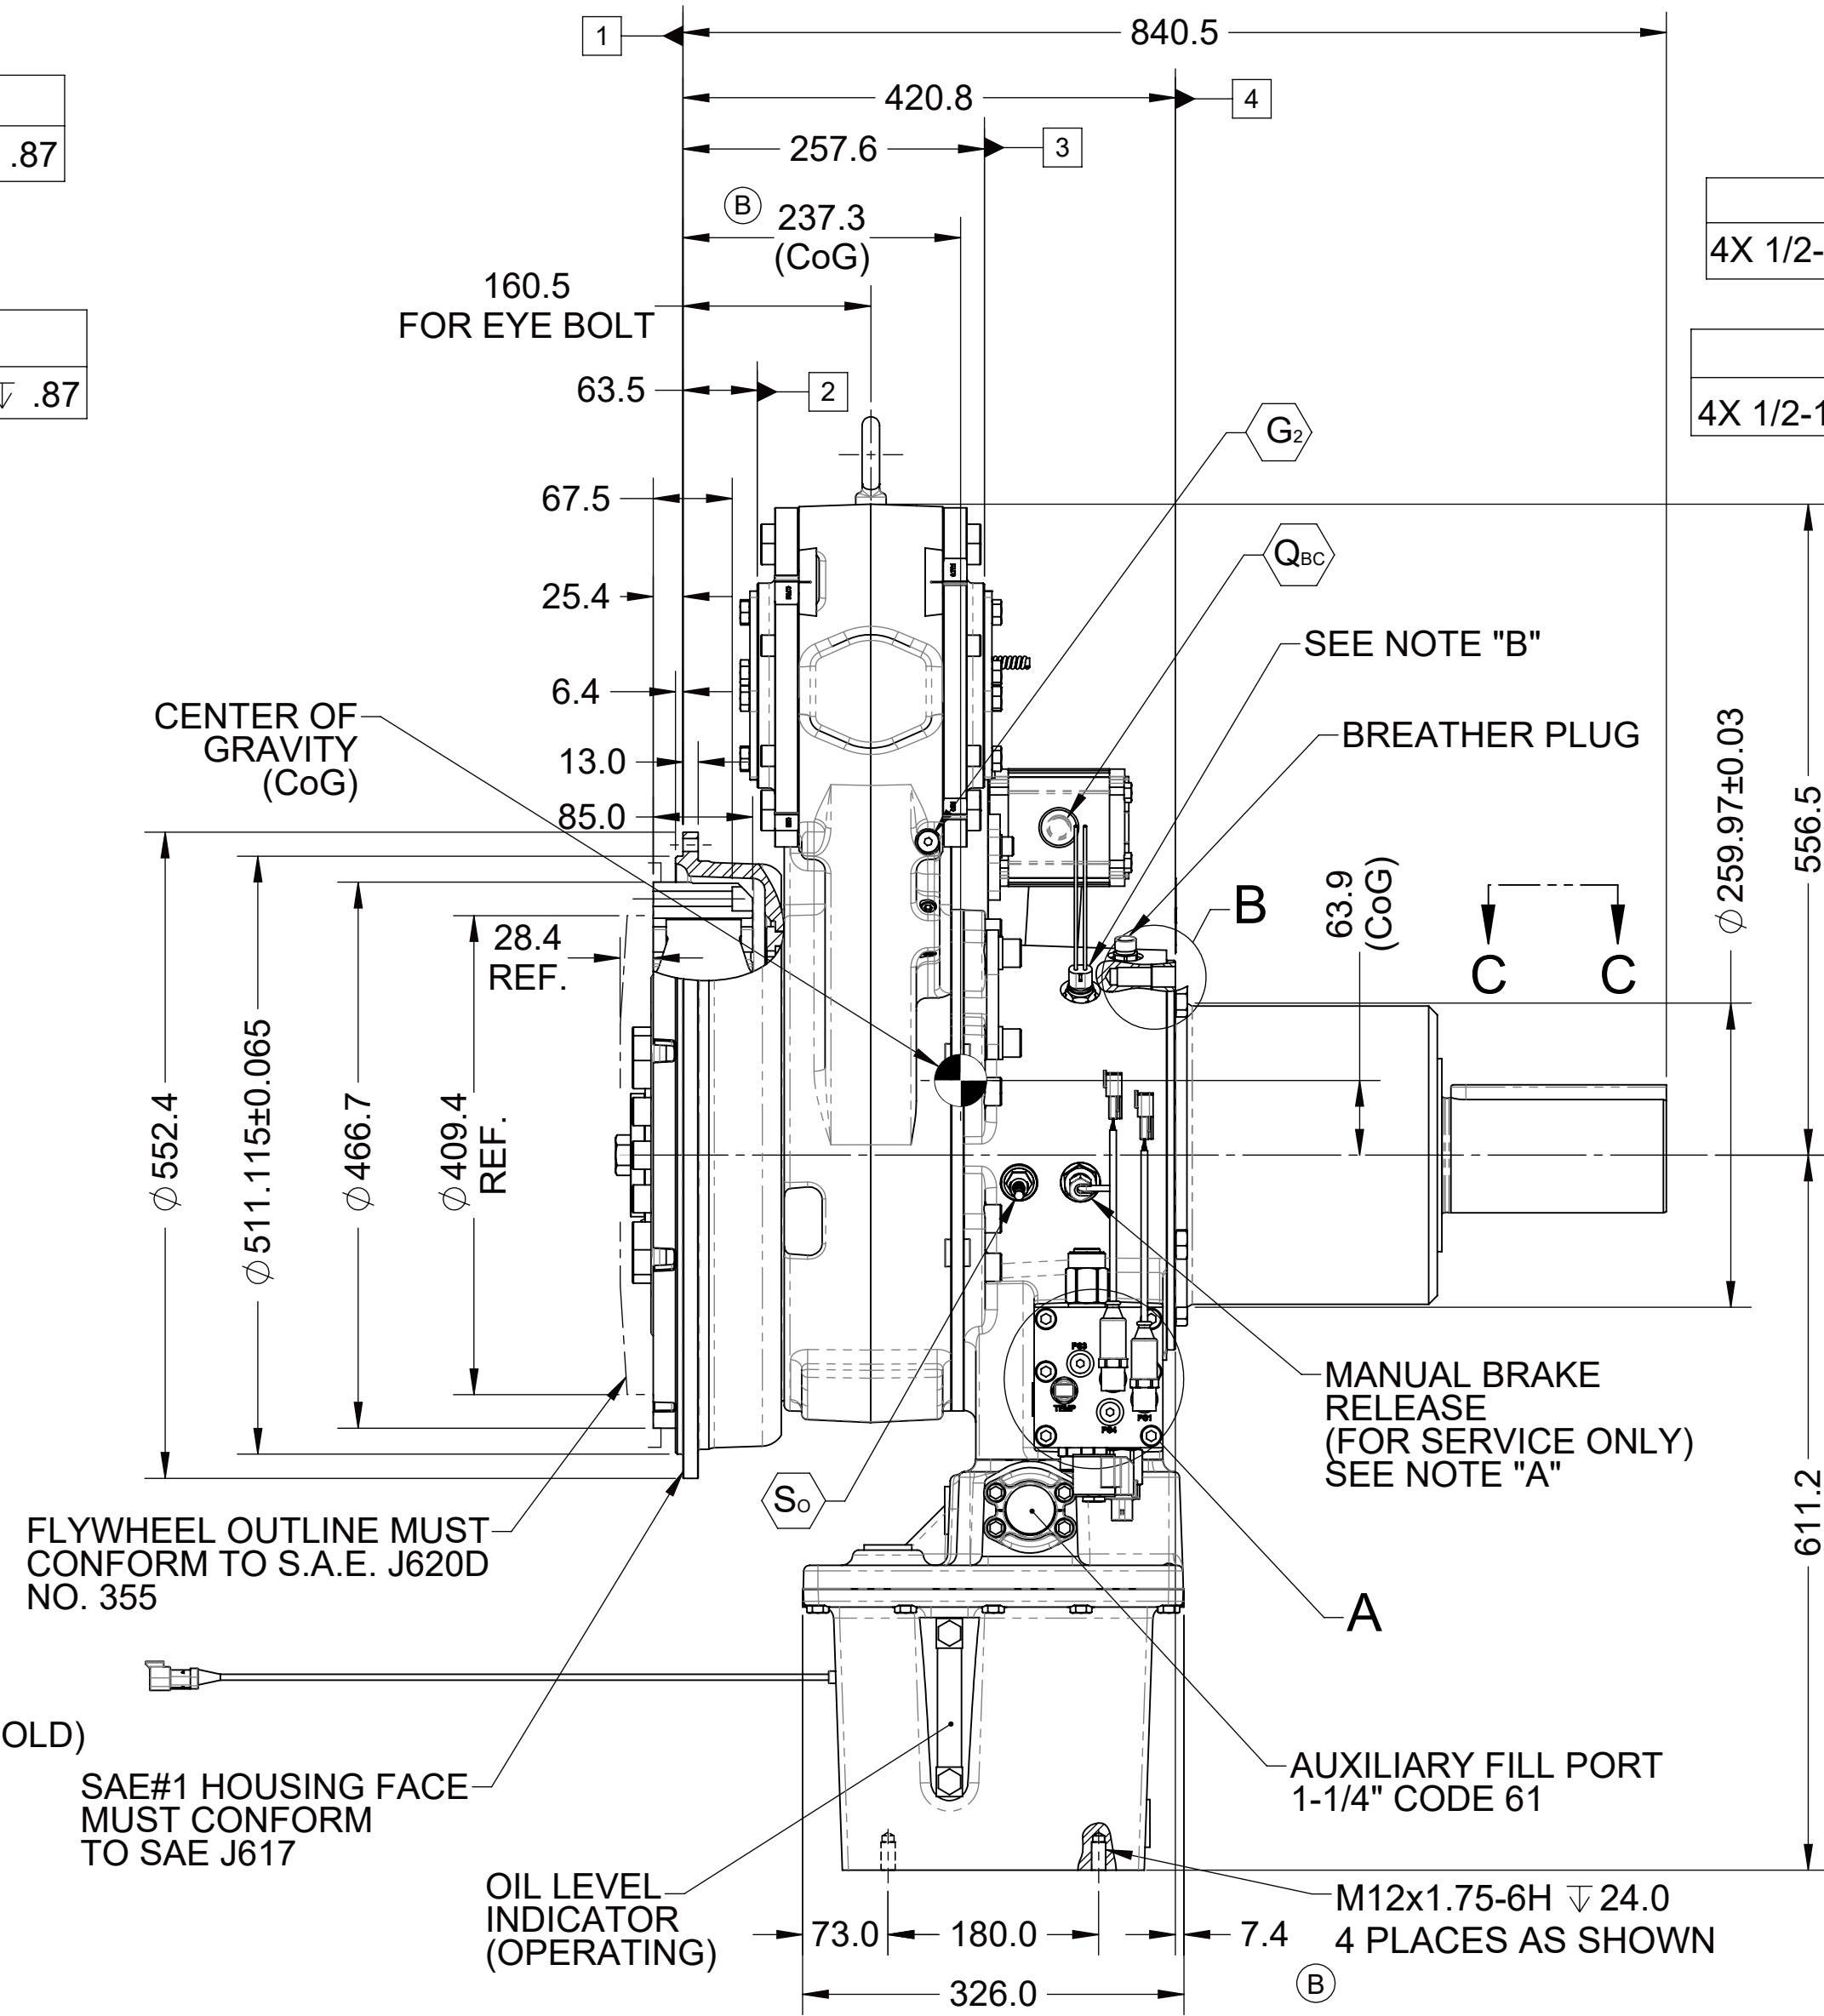

REMOTE MOUNTED
ELECTRONIC CONTROLLER & BRACKET
(SHIPPED LOOSE)
SEE INSTALLATION DRAWINGS:
CONTROLLER : PX1040894
BRACKET : PX1037967

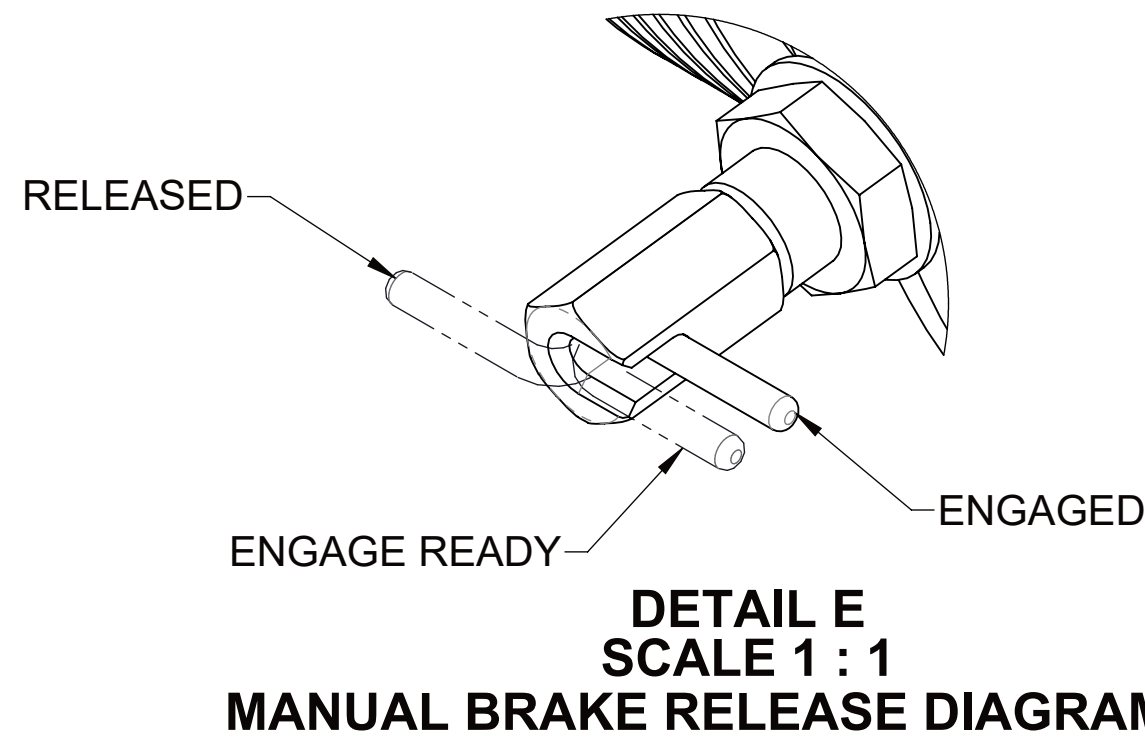

FIRST USE ASSEMBLY: S1033481 FIRST USE MODEL: HP800 SIMILAR TO:	WEIGHT: 743 _g WR: kg-m	THIRD ANGLE PROJECTION	MATERIAL:	DATE: 3/8/2018 SCALE: 1:5.5 DRAWN BY: JMB CHECKED BY: DAJ APPROVED BY: DAJ	HEAT TREAT:	DESCRIPTION: INSTALLATION HPTO, HP800	ECNWF-100635 03/19/2021 CHANGE NO. DATE	TWIN(DISC) RACINE, WI 53403 - USA 1029600D SHEET: 1 OF 1 REV: B
NOTES: THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF TWIN DISC, INCORPORATED THIS NOTICE IS NOT INTENDED TO NULLIFY OR LIMIT RIGHTS GRANTED TO THE U.S. GOVERNMENT OR OTHERS BY CONTRACT.								